

## CARMEN-RS-C-WHT

~10° spot beam. Assembly with holder C compatible with LEDiL HEKLA. White version.

### SPECIFICATION:

Dimensions	Ø 69.5 mm
Height	41.5 mm
Fastening	socket
ROHS compliant	yes ⓘ


### MATERIALS:

Component	Type	Material	Colour	Finish
CARMEN-RS	Single lens	PMMA	clear	
CARMEN-HLD-C-WHT	Holder	PC	white	



### ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP16940_CARMEN-RS-C-WHT	Single lens	150	150	15	8.8
» Box size: 480 x 280 x 300 mm					

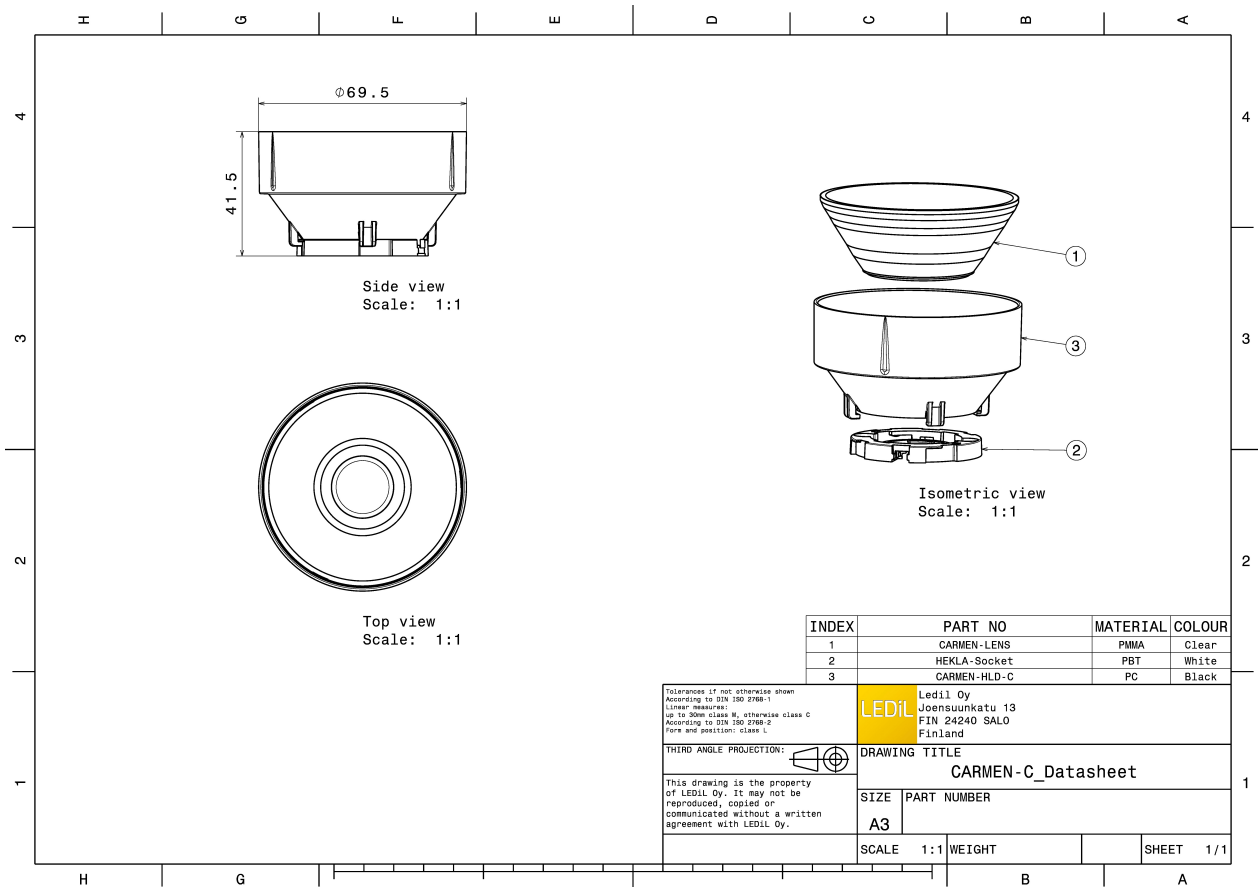


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)



#### OPTICAL RESULTS (MEASURED):



LED Vesta TW 6mm DP  
 FWHM / FWTM 9.0° / 17.0°  
 Efficiency 82 %  
 Peak intensity 15.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C16142\_HEKLA-SOCKET-K  
 Bender Wirth: 504 Typ L8


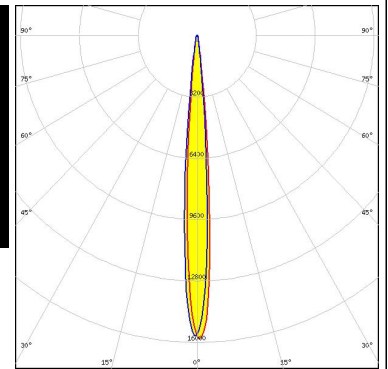


LED Vesta TW 9mm (9W) DP  
 FWHM / FWTM 12.0° / 23.0°  
 Efficiency 83 %  
 Peak intensity 7.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C16142\_HEKLA-SOCKET-K  
 Bender Wirth: 489 Typ L8

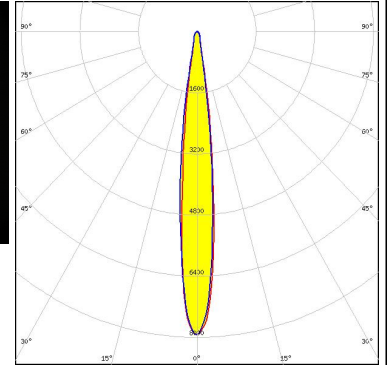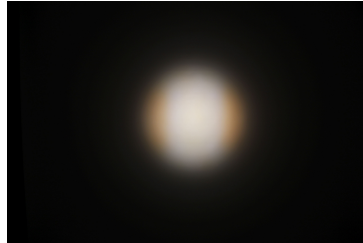


#### CITIZEN

LED CLU700/701/702/703  
 FWHM / FWTM 8.0° / 15.0°  
 Efficiency 86 %  
 Peak intensity 20.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15255\_HEKLA-SOCKET-C

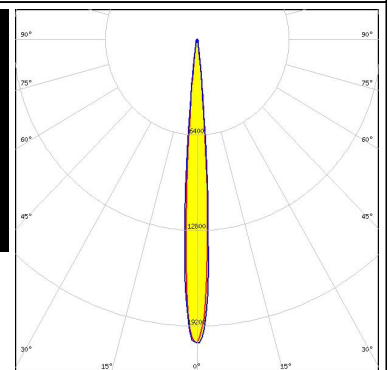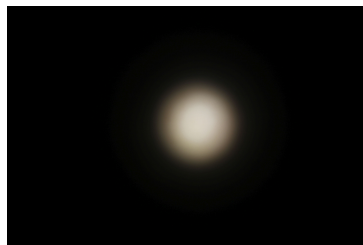

#### CITIZEN



LED CLU710/711  
 FWHM / FWTM 12.0° / 20.0°  
 Efficiency 83 %  
 Peak intensity 10.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15859\_HEKLA-SOCKET-I

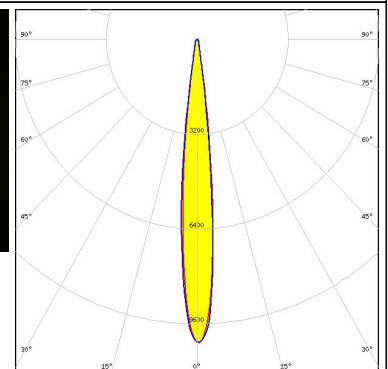


#### OPTICAL RESULTS (MEASURED):

#### CITIZEN


LED CLU7B2  
FWHM / FWTM 6.0° / 11.0°  
Efficiency 87 %  
Peak intensity 38.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

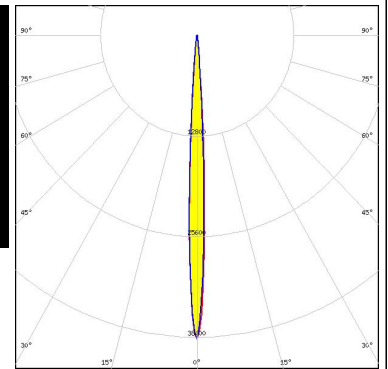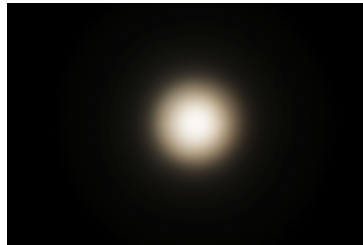



LED CXA/B 15xx  
FWHM / FWTM 12.0° / 20.0°  
Efficiency 85 %  
Peak intensity 10.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15256\_HEKLA-SOCKET-D

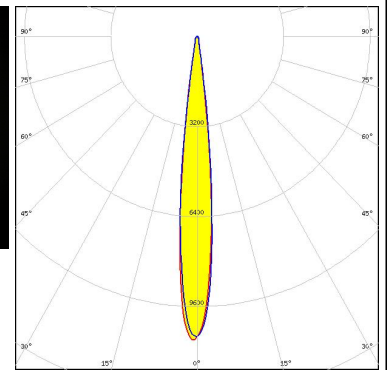

LED LUXEON CX Plus CoB L08 (Gen2)  
FWHM / FWTM 18.0° / 31.0°  
Efficiency 84 %  
Peak intensity 4.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 637a Hekla

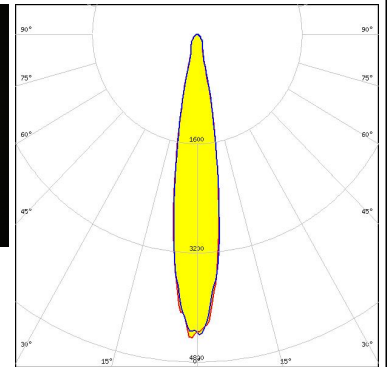

LED LUXEON CX Plus CoB - HD S01H4  
FWHM / FWTM 8.0° / 14.0°  
Efficiency 87 %  
Peak intensity 27.2 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 634c Lena

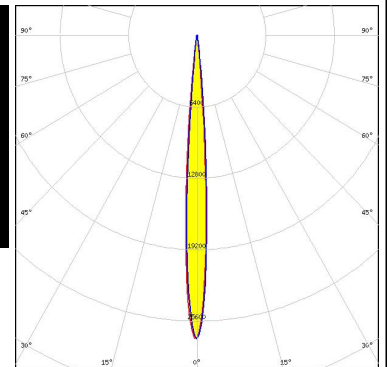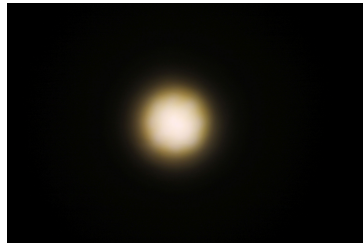





#### OPTICAL RESULTS (MEASURED):




LED LUXEON CX Plus CoB - HD S04H9  
 FWHM / FWTM 13.0° / 20.0°  
 Efficiency 86 %  
 Peak intensity 10.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 Bender Wirth: 634c Hekla

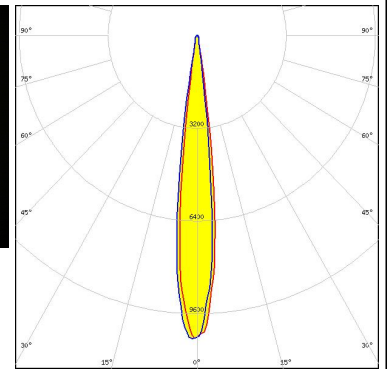



LED LUXEON CX Plus CoB L04 / L05 (Gen2)  
 FWHM / FWTM 15.0° / 26.0°  
 Efficiency 85 %  
 Peak intensity 6.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 Bender Wirth: 637a Hekla

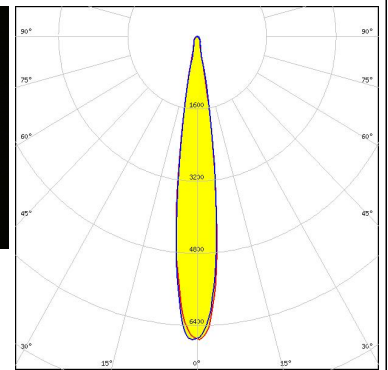

LED LUXEON CX Plus CoB M02 / M03 (Gen2)  
 FWHM / FWTM 11.0° / 19.0°  
 Efficiency 86 %  
 Peak intensity 13.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 Bender Wirth: 641a Hekla

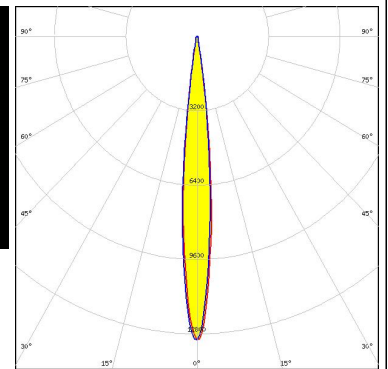


LED LUXEON CX Plus CoB S01 (Gen2)  
 FWHM / FWTM 8.0° / 13.0°  
 Efficiency 87 %  
 Peak intensity 27.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 Bender Wirth: 634c Hekla

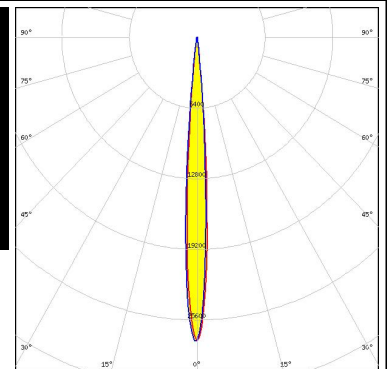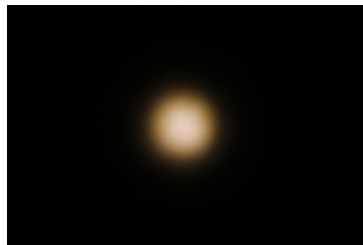


#### OPTICAL RESULTS (MEASURED):




LED CxM-11 (19x19)  
 FWHM / FWTM 16.0° / 27.0°  
 Efficiency 84 %  
 Peak intensity 5.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15859\_HEKLA-SOCKET-I

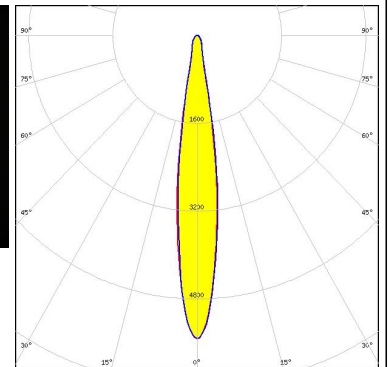


LED CXM-3  
 FWHM / FWTM 6.0° / 11.0°  
 Efficiency 88 %  
 Peak intensity 36.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15255\_HEKLA-SOCKET-C

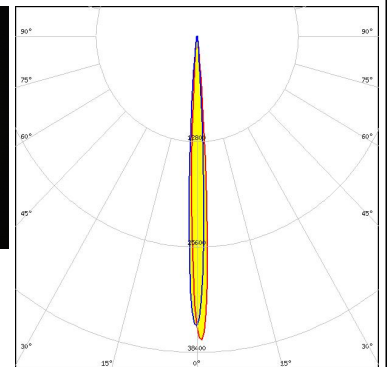

LED CXM-4  
 FWHM / FWTM 7.0° / 13.0°  
 Efficiency 86 %  
 Peak intensity 27.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15255\_HEKLA-SOCKET-C

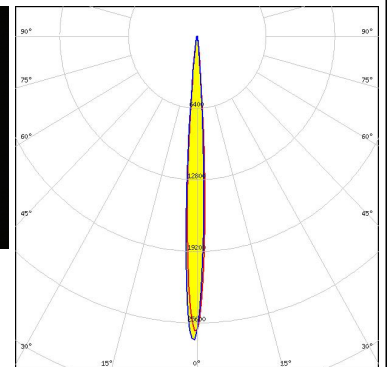



LED LC020C  
 FWHM / FWTM 11.0° / 19.0°  
 Efficiency 84 %  
 Peak intensity 13 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15848\_HEKLA-SOCKET-G

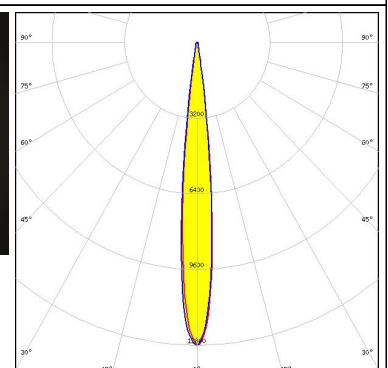

#### OPTICAL RESULTS (MEASURED):



#### XICATO

LED XOB 6 mm  
 FWHM / FWTM 9.0° / 15.0°  
 Efficiency 83 %  
 Peak intensity 20.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15255\_HEKLA-SOCKET-C

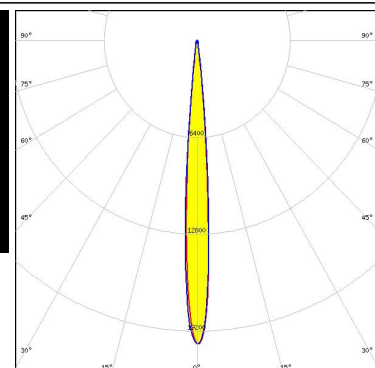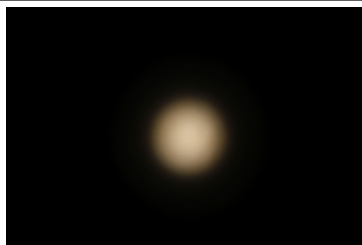

#### XICATO


LED XOB 9.8 mm  
 FWHM / FWTM 12.0° / 21.0°  
 Efficiency 85 %  
 Peak intensity 10.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15255\_HEKLA-SOCKET-C

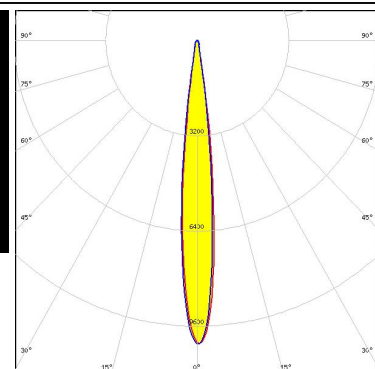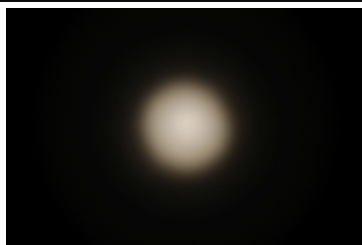


#### OPTICAL RESULTS (SIMULATED):




LED V10 Gen7  
FWHM / FWTM 14.0° / 24.0°  
Efficiency 86 %  
Peak intensity 9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

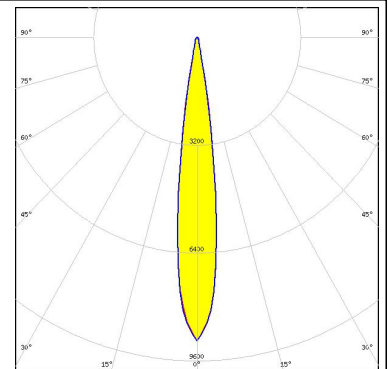

LED V4 HD Gen 7  
FWHM / FWTM 8.0° / 14.0°  
Efficiency 88 %  
Peak intensity 33.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15253\_HEKLA-SOCKET-A

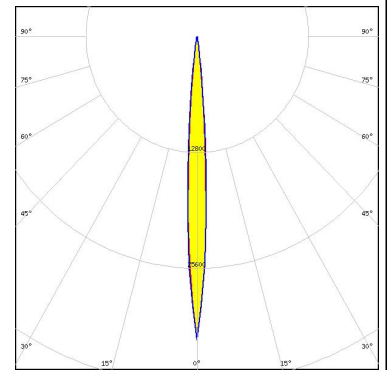


LED V6 HD Gen 7  
FWHM / FWTM 10.0° / 18.0°  
Efficiency 87 %  
Peak intensity 20.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

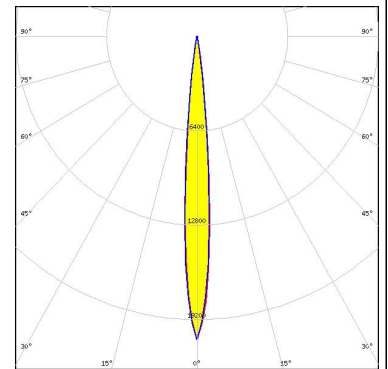

## CITIZEN


LED CLL02x/CLU02x (LES10)  
FWHM / FWTM 14.0° / 25.0°  
Efficiency 90 %  
Peak intensity 10.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

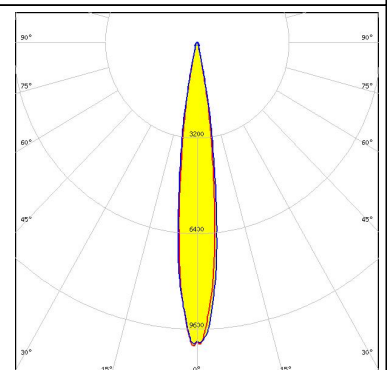


#### OPTICAL RESULTS (SIMULATED):




LED CMU15xx  
FWHM / FWTM 19.0° / 36.0°  
Efficiency 82 %  
Peak intensity 4.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F17438\_HEKLA-G2-I

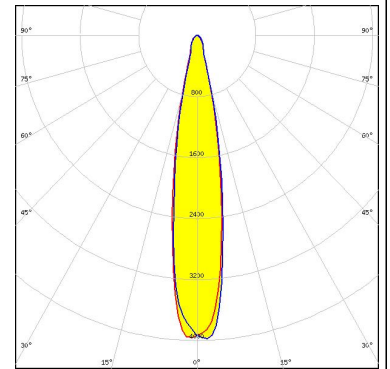

LED MJT COB LES 6  
FWHM / FWTM 9.0° / 17.0°  
Efficiency 87 %  
Peak intensity 22.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

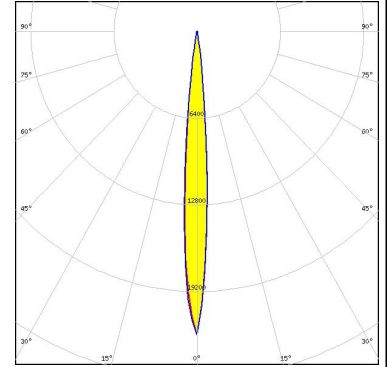


LED MJT COB LES 9.8  
FWHM / FWTM 15.0° / 24.0°  
Efficiency 85 %  
Peak intensity 8.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

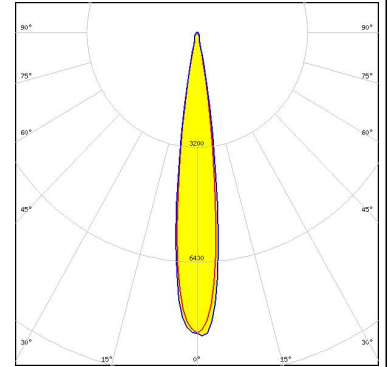

#### TRIDONIC

LED SLE G7 LES09  
FWHM / FWTM 14.0° / 24.0°  
Efficiency 87 %  
Peak intensity 9.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
F15255\_HEKLA-SOCKET-C

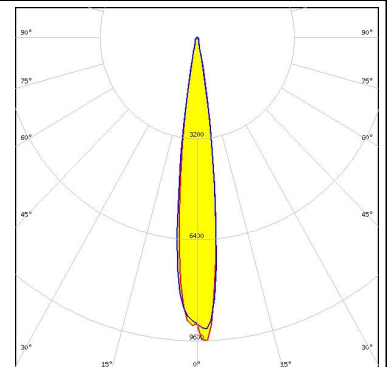

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)