

#### **ILONA-RS**

~10° spot beam

#### **SPECIFICATION:**

Ø 49.8 mm **Dimensions** Height 29.3 mm socket Fastening **ROHS** compliant yes 🕕



Box weight (kg)

9.6

#### **MATERIALS:**

Component Type Material Colour **Finish ILONA-RS** Single lens **PMMA** clear


#### **ORDERING INFORMATION:**

Component Qty in box MOQ MPQ

264 C16686\_ILONA-RS 99 33 » Box size: 480 x 280 x 300 mm




# **PRODUCT** C16686\_ILONA-RS

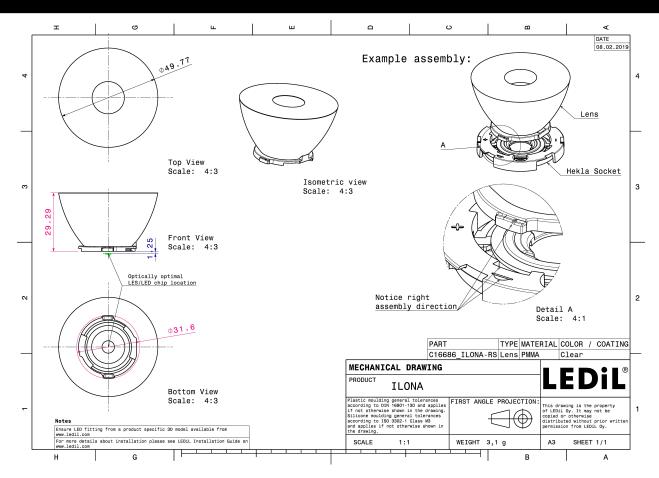

See also our general installation guide: www.ledil.com/installation\_guide



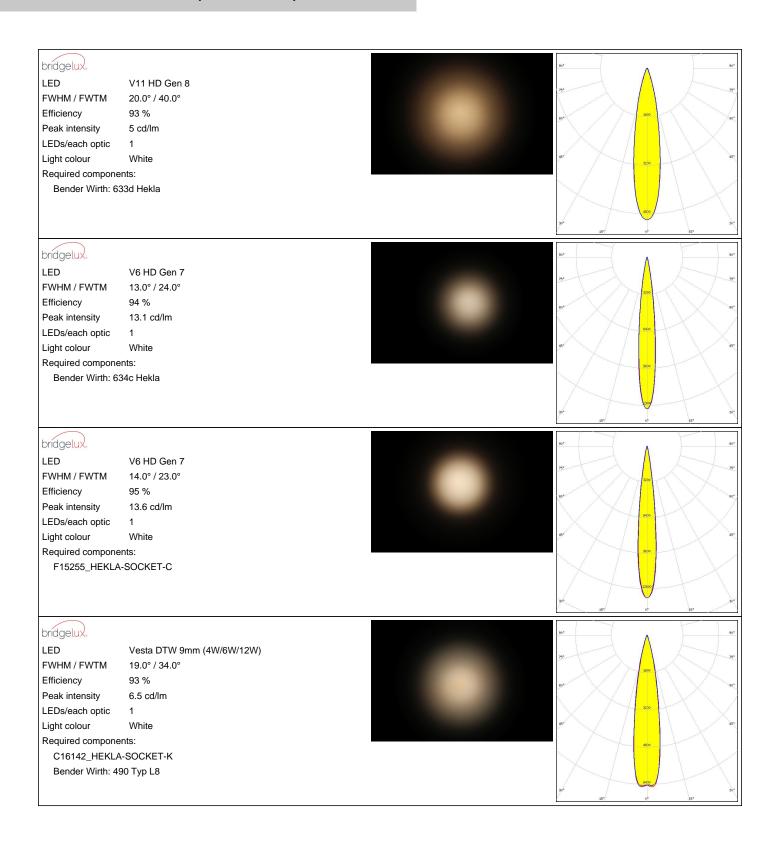






LED Vesta TW 6mm DP
FWHM / FWTM 14.0° / 25.0°
Efficiency 91 %
Peak intensity 12.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 504 Typ L8

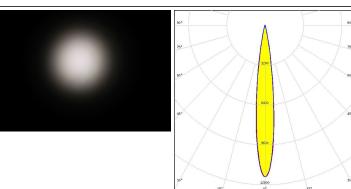


### **CITIZEN**

LED CLU700/701/702/703

FWHM / FWTM 12.0° / 22.0°
Efficiency 96 %
Peak intensity 15.3 cd/lm

LEDs/each optic 1 Light colour White Required components:


F15255\_HEKLA-SOCKET-C

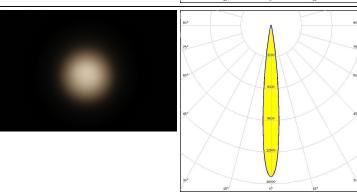

### **CITIZEN**

LED CLU7A2/7A3
FWHM / FWTM 9.0° / 17.0°
Efficiency 94 %
Peak intensity 26 cd/lm
LEDs/each optic 1
Light colour White

F15255\_HEKLA-SOCKET-C

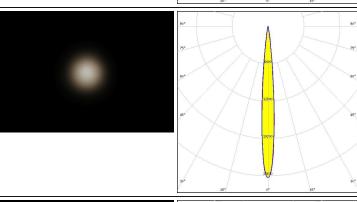


### **CITIZEN**


Required components:

LED CLU7B2
FWHM / FWTM 8.0° / 16.0°
Efficiency 94 %
Peak intensity 32.2 cd/lm


LEDs/each optic 1
Light colour White
Required components:
F15255\_HEKLA-SOCKET-C

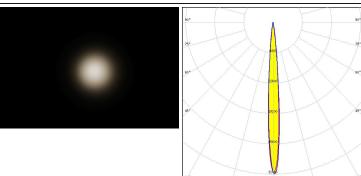




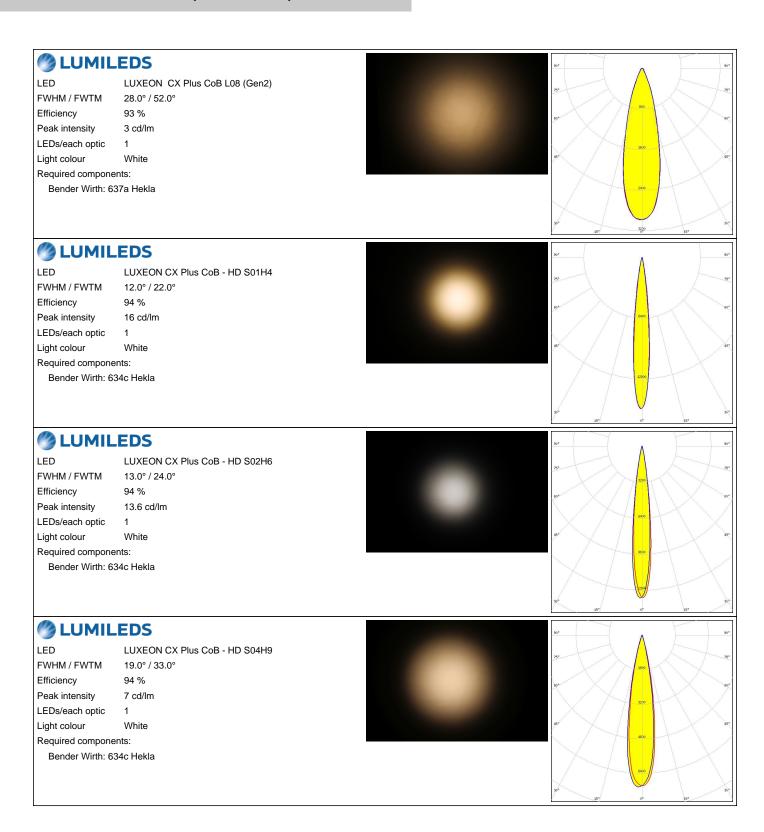




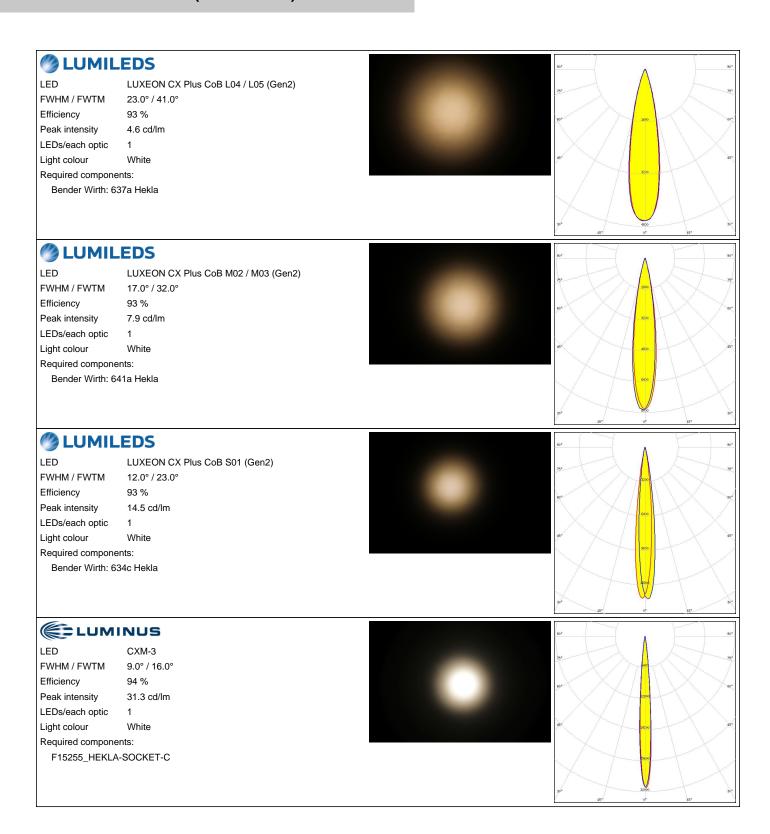



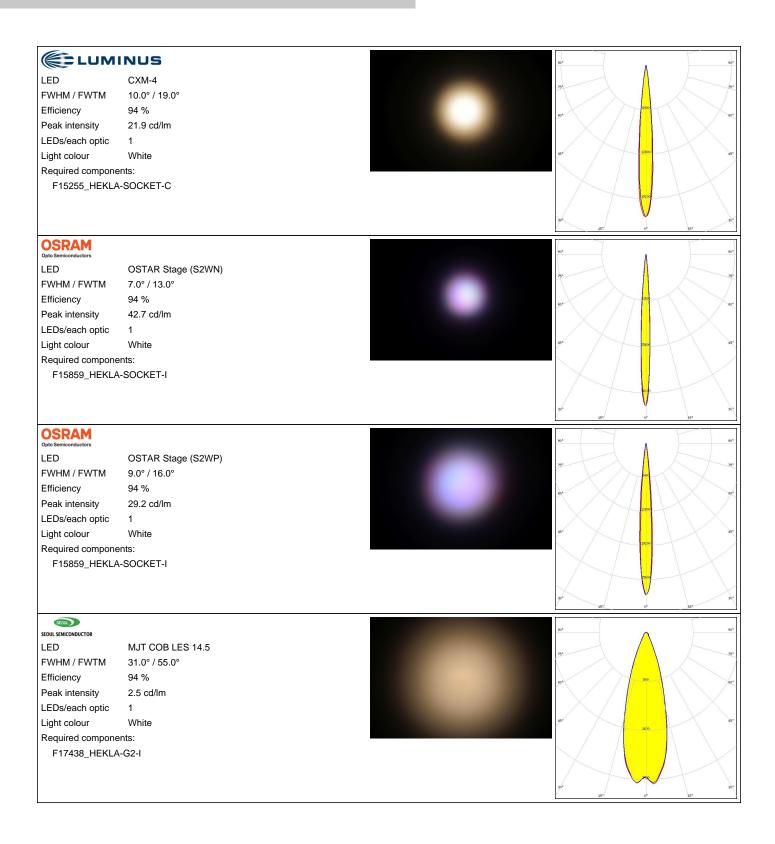




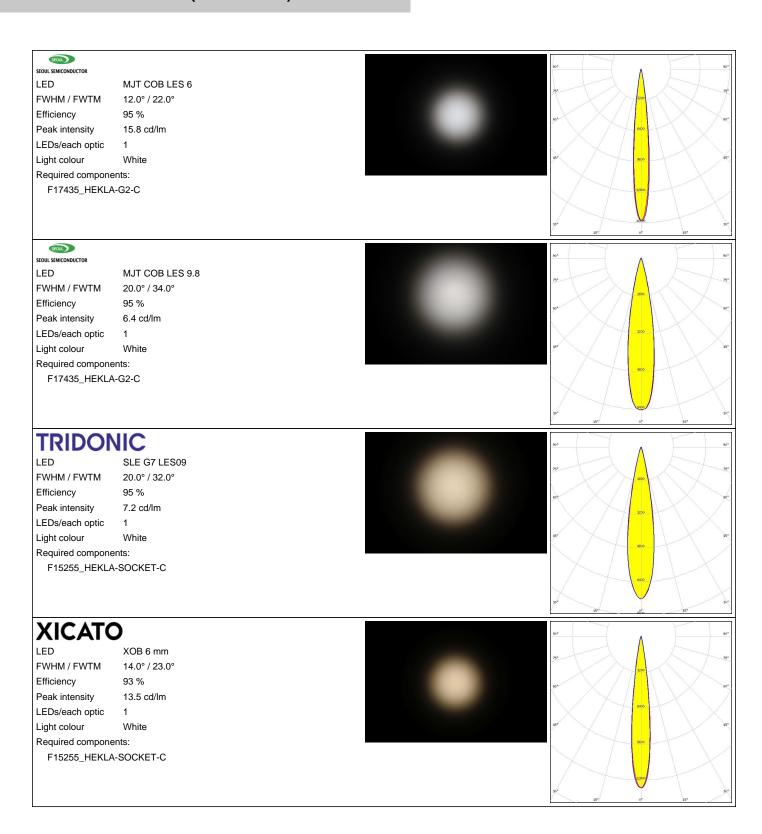



## **XICATO**

LED XOB 9.8 mm
FWHM / FWTM 19.0° / 32.0°
Efficiency 94 %
Peak intensity 7.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255\_HEKLA-SOCKET-C

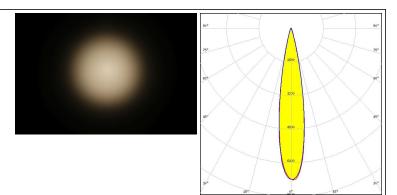






LED V13 Gen 8 FWHM / FWTM 30.0° / 50.0°

Efficiency 93 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1

Light colour White

Required components: F15859\_HEKLA-SOCKET-I




#### bridgelux.

LED V4 HD Gen 7
FWHM / FWTM 10.0° / 20.0°
Efficiency 95 %

Peak intensity 24.4 cd/lm LEDs/each optic 1 Light colour White

Required components:

F15253\_HEKLA-SOCKET-A



#### bridgelux

 LED
 V9 HD Gen7


 FWHM / FWTM
 18.0° / 30.0°

 Efficiency
 94 %

Peak intensity 8.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15859\_HEKLA-SOCKET-I



#### bridgelux.


 LED
 Vero SE 10

 FWHM / FWTM
 16.0° / 34.0°

 Efficiency
 94 %

 Peak intensity
 7.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:






## **CITIZEN**

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 18.0° / 33.0°
Efficiency 92 %
Peak intensity 7.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255\_HEKLA-SOCKET-C




### **CITIZEN**

LED CLU710/711
FWHM / FWTM 17.0° / 30.0°
Efficiency 92 %
Peak intensity 9.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15859\_HEKLA-SOCKET-I



### **CITIZEN**

 LED
 CLU712/713


 FWHM / FWTM
 18.0° / 31.0°

 Efficiency
 94 %

 Peak intensity
 8.2 cd/lm

LEDs/each optic 1
Light colour White


Required components: F17438\_HEKLA-G2-I



## CREE &

LED CHA0304
FWHM / FWTM 9.0° / 18.0°
Efficiency 95 %
Peak intensity 27.4 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435\_HEKLA-G2-C





## CREE &

LED CHA0410


FWHM / FWTM 10.0° / 20.0° Efficiency 95 %

Peak intensity 21.8 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17435\_HEKLA-G2-C



## CREE \$

LED CMA1303


FWHM / FWTM 10.0° / 20.0°

Efficiency 95 %
Peak intensity 22.8 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17439\_HEKLA-G2-J



## CREE -

LED CMA1306


FWHM / FWTM 12.0° / 24.0° Efficiency 95 %

Efficiency 95 %
Peak intensity 15.5 cd/lm

LEDs/each optic 1

Light colour White

Required components: F15956\_HEKLA-SOCKET-J



## CREE \$


LED CXA/B 13xx

FWHM / FWTM 13.0° / 24.0° Efficiency 93 %

Peak intensity 15 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15956\_HEKLA-SOCKET-J





## CREE &

LED CXA/B 15xx


FWHM / FWTM 20.0° / 32.0° Efficiency 92 %

Efficiency 92 %
Peak intensity 7.4 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17436\_HEKLA-G2-D



## CREE \$

LED CXA/B 15xx

FWHM / FWTM 19.0° / 32.0°


Efficiency 93 %

Peak intensity 7.6 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15256\_HEKLA-SOCKET-D



## CREE +

LED CXA/B 1816 & CXA/B 1820 & CXA 1850


FWHM / FWTM 23.0° / 40.0°

Efficiency 93 %

Peak intensity 4.4 cd/lm

LEDs/each optic 1
Light colour White

Required components: F15254\_HEKLA-SOCKET-B



### **DESCRIPTION** LUMILEDS

LED LUXEON CoB 1202/1203

 $FWHM / FWTM \qquad \qquad 18.0^{\circ} / 33.0^{\circ}$ 


Efficiency 93 %
Peak intensity 7.4 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F17437\_HEKLA-G2-H







LED LUXEON CoB 1202s

 FWHM / FWTM
 12.0° / 24.0°


 Efficiency
 95 %

 Peak intensity
 15.6 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15858\_HEKLA-SOCKET-H




#### LUMILEDS

LED LUXEON CoB 1204/1205

FWHM / FWTM 26.0° / 44.0°
Efficiency 94 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1
Light colour White

Required components:




#### LUMILEDS

LED LUXEON CoB 1204HD

FWHM / FWTM 20.0° / 32.0°
Efficiency 94 %
Peak intensity 7.7 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17437\_HEKLA-G2-H




### **DESCRIPTION** LUMILEDS

LED LUXEON CoB 1205HD

FWHM / FWTM 24.0° / 39.0°
Efficiency 94 %
Peak intensity 5 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17437\_HEKLA-G2-H








LED LUXEON CoB 1208

FWHM / FWTM 27.0° / 50.0°
Efficiency 91 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C16142\_HEKLA-SOCKET-K



#### **ELUMINUS**


LED CxM-6 (13.5x13.5)

FWHM / FWTM 14.0° / 25.0°
Efficiency 94 %
Peak intensity 13.4 cd/lm
LEDs/each ontic 1

LEDs/each optic 1
Light colour White

Required components:

F15255\_HEKLA-SOCKET-C



#### **WNICHIA**

LED COB S-Type (LES 6)

 FWHM / FWTM
 12.0° / 24.0°


 Efficiency
 93 %

 Peak intensity
 15.4 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15848\_HEKLA-SOCKET-G



#### **WNICHIA**

LED COB S-Type (LES 6)

FWHM / FWTM 12.0° / 24.0°


Efficiency 93 %

Peak intensity 15.6 cd/lm

LEDs/each optic 1

Light colour White Required components:

F15848\_HEKLA-SOCKET-G





#### **WNICHIA**


LED COB S-Type (LES 7)

FWHM / FWTM 16.0° / 26.0° Efficiency 95 % Peak intensity 11.6 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15848\_HEKLA-SOCKET-G




#### **WNICHIA**

LED NFSWE11A FWHM / FWTM 18.0° / 30.0°

Efficiency 88 %
Peak intensity 8.4 cd/lm
LEDs/each optic 30
Light colour White

Required components:

C16142\_HEKLA-SOCKET-K




### PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 24.0° / 44.0°
Efficiency 93 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour White

Light colour
Required components:

Bender Wirth: 632a Hekla XL



### **PHILIPS**

Required components:

LED Fortimo SLM L15 CoB

FWHM / FWTM 28.0° / 52.0°


Efficiency 92 %

Peak intensity 3 cd/lm

LEDs/each optic 1

Light colour White

Bender Wirth: 632a Hekla XL






### **PHILIPS**

LED Fortimo SLM L15 CoB

FWHM / FWTM 26.0° / 50.0°
Efficiency 93 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Bender Wirth: 632a Hekla XL



### **SAMSUNG**

 LED
 LC010C

 FWHM / FWTM
 14.0° / 24.0°


 Efficiency
 94 %

 Peak intensity
 14.4 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15848\_HEKLA-SOCKET-G



### **SAMSUNG**

 LED
 LC020C


 FWHM / FWTM
 14.0° / 24.0°

 Efficiency
 94 %

 Peak intensity
 13.5 cd/lm

LEDs/each optic 1 Light colour White

Required components: F17438\_HEKLA-G2-I




## **XICATO**

LED XTM - 9mm LES
FWHM / FWTM 18.0° / 32.0°
Efficiency 94 %
Peak intensity 8.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C15743\_XTM-ADAPTER-50-B





## PRODUCT DATASHEET C16686\_ILONA-RS

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

18/18

www.ledil.com/ where\_to\_buy