


Silicon Bidirectional Trigger Diodes

These diacs are intended for use in thyristor phase control, circuits for lamp-dimming, universal-motor speed controls, and heat controls.

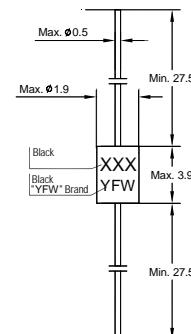

Glass Case DO-35
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Value | Unit |
|--|-----------------------|---------------|------|
| Power Dissipation ($T_a = 65^\circ\text{C}$) | P_{tot} | 150 | mW |
| Repetitive Peak On-state Current ($t_p = 20 \mu\text{s}$, $f = 100 \text{ Hz}$) | I_{TRM} | 2 | A |
| Operating Junction and Storage Temperature Range | T_j, T_{stg} | - 40 to + 125 | °C |

Characteristics at $T_a = 25^\circ\text{C}$

| Parameter | Symbol | Min. | Max. | Unit |
|--|------------------------------------|------|------|------|
| Breakover Voltage at $C = 22 \text{ nF}$, see diagram 1 | V_{BO} | 28 | 36 | V |
| | | 30 | 38 | |
| | | 35 | 45 | |
| Breakover Voltage Symmetry at $C = 22 \text{ nF}$, see diagram 1 | $[+V_{\text{BO}} - V_{\text{BO}}]$ | - | 3 | V |
| Dynamic Breakover Voltage at $\Delta I = [I_{\text{BO}} \text{ to } I_F = 10 \text{ mA}]$ | $ \Delta V \pm $ | 5 | - | V |
| Output Voltage See diagram 2 | V_O | 5 | - | V |
| Breakover Current at $C = 22 \text{ nF}$ | I_{BO} | - | 50 | µA |
| Leakage Current at $V_B = 0.5 V_{\text{BO}} \text{ max}$ | I_B | - | 10 | µA |
| Rise Time See diagram 3 | t_r | - | 2 | µs |

Diagram 1: Current-voltage characteristics

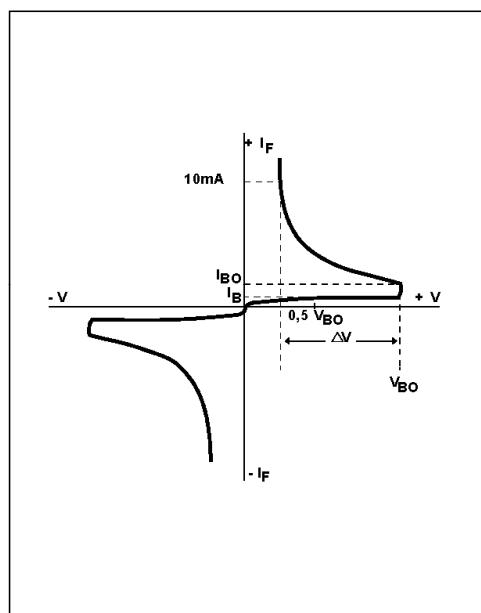


Diagram 2: Test circuit for output voltage

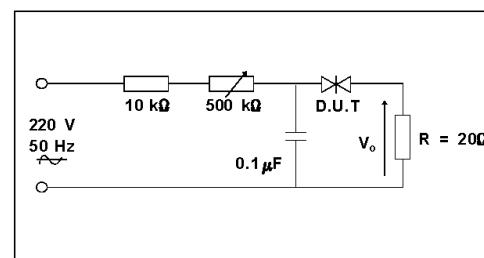


Diagram 3: Test circuit see diagram 2.
Adjust R for $I_p = 0.5A$

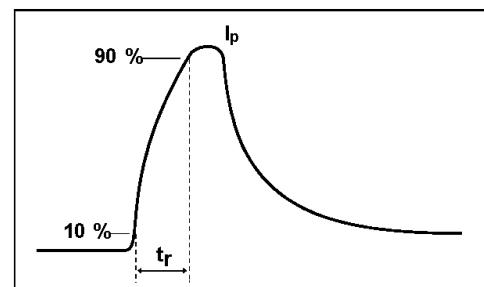


Fig. 1: Power dissipation versus ambient temperature (maximum values)

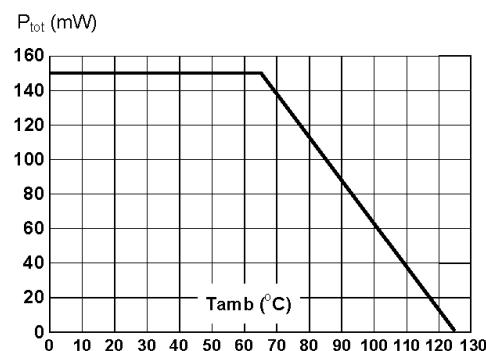


Fig. 2: Relative variation of V_{BO} versus junction temperature (typical values)

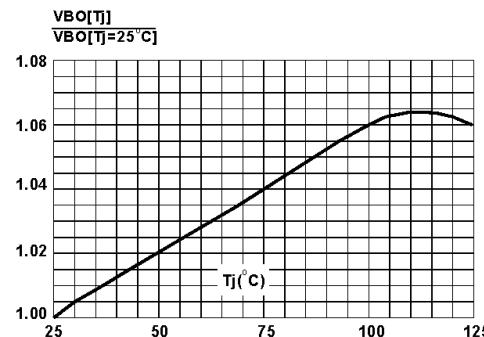


Fig. 3: Peak pulse current versus pulse duration (maximum values)

