RLM102 Series

Features

- I RoHS compliant.
- I Bilateral symmetrical.
- I Less decay at on/off state.
- Approximately zero leaking current before clamping voltage
- I High capability to withstand repeated lightning strikes.
- Low electrode capacitance(≤1.0pF) and high isolation (≥100MΩ).
- I Temperature, humidity and lightness insensitive.
- Working temperature range: : -45°C ~ +85°C
- I Storaging temperature range: -45°C ~ +85°C




Applications

- I Power Supplies
- I Motor sparks eliminating
- I Relay switching spark absorbing
- I Data line pulse guarding
- I Telephone/Fax/Modem
- I High frequency signal transmitters/receivers

- I Satellite antenna
- I Radio amplifiers
- I Alarm systems
- I Cathode ray tubes in Monitors/ Television Viewing Systems

Part Number Code

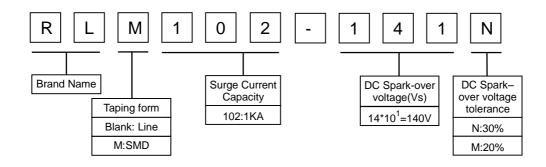

Revised: 2019-08-28







RLM102 Series

Electrical Characteristics

Type Number	DC Spark-Over Voltage	Insul	in. ation tance	Max. Capacitance (1kHz-6Vmax.)	Surge Current Capacity	Surge Life Test
	Vs	Test Voltage	I _R	Cj	8/20µs	@8/20μs
	V	V	MΩ	pF	Α	
RLM102-141N	140(126~210)	50	100	1	1000	100A 10 times
RLM102-181N	180±30%	50	100	1	1000	100A 10 times
RLM102-201M	200±20%	100	100	1	1000	100A 10 times
RLM102-301M	300±20%	100	100	1	1000	100A 10 times
RLM102-401M	400±20%	250	100	1	1000	100A 10 times
RLM102-501M	500±20%	250	100	1	1000	100A 10 times

Test Methods And Results

Test Item	Test Method	Specification
DC Spark-over Voltage Vs(V)	Measure starting discharge voltage (Vs) by gradually increasing applied DC voltage. Test current is 0.5mA max. And the DC voltage ascends up within 500V/second.	It depands on each spec.
Insulation Resistance	Measure the insulation resistance across the terminal at regular voltage. But the test voltage doesn't over the DC spark-over voltage.	100MΩ min.
Capacitance Cj(pF)	Measure the electrostatic capacitance by applying a voltage of less than 6V (at 1KHz) between terminals.	1pF max.
Life	10KV with 1500pf condenser is discharged through 0Ω resistor. 200 times at an interval of 10sec.	DC spark-over voltage JSE: △ Vs/Vs ≤30%
Surge Current Capacity	1.2/50 μ s & 8/20 μ s, 3000A, electrically connected with a resistor (4~6 Ω), ±5 times, each time interval 60 seconds. Thereafter, outer appearance shall be visually examined.	No crack and no failures
Cold Resistance	Measurement after -40 °C /1000 HRS & normal temperature/2 HRS.	
Heat Resistance	Measurement after 125℃ /1000 HRS & normal temperature/2 HRS.	
Humidity Resistance	idity Resistance Measurement after humidity 90~95 (45°C°C) /1000 HRS & normal temperature/2 HRS.	
Temperature Cycle	10 times repetition of cycle -40 °C /30min →normal, temp/2 min →125°C /30min, measurement after normal temp/2 HRS.	
Solder Ability	Apply flux and immerse in molten solder 230±5°C for 3sec up to the point of 1.5mm from body. Check for solder adhesion.	Lead wire is evenly covered by solder.
Solder Heat	Measurement after lead wire is dipped up to the point of 1.5mm from body into 260 $\pm 5^\circ\!$	Conformed to rated spec.

Revised: 2019-08-28






RLM102 Series

Recommended Soldering Conditions

Flow Soldering Conditions



Hand Soldering

Solder iron temperature: $350\pm5^{\circ}$ C Heating time: 3 seconds max.

General attention to soldering

- 1. High soldering temperatures and long soldering times can cause leaching of the termination, decrease in adherence strength, and the change of characteristic may occur.
- 2.For soldering, please refer to the soldering curves above. However, please keep exposures to temperatures exceeding 200 $^\circ\!\mathrm{C}$ to fewer than 50 seconds.
- 3.Please use a mild flux (containing less than 0.2wt% CI). Also, if the flux is water soluble, be sure to wash thoroughly to remove any residue from the underside of components that could affect resistance.
- 1) Time shown in the above figures is measured from the point when chip surface reaches temperature.
- 2) Temperature difference in high temperature part should be within 110 $^{\circ}\mathrm{C}$
- 3) After soldering, do not force cool, allow the parts to cool gradually.

Cleaning

When using ultrasonic cleaning, the board may resonate if the output power is too high. Since this vibration can cause cracking or a decrease in the adherence of the termination, we recommend that you use the conditions below.


Revised: 2019-08-28

Frequency: 40kHz max.

Output power: 20W/liter

Cleaning time: 5 minutes max.

Dimensions



DIM	Millimeters	Inches		
Α	5.0±0.5	0.197±0.02		
С	Ф2.6±0.5	0.102±0.02		
D	Ф2.7±0.5	0.106±0.02		









RLM102 Series

Taping and Reel Specifications

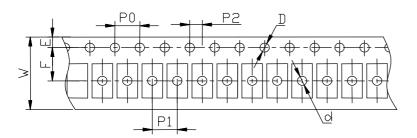



Symbol	Millimeters	Inches		
w	12.0±0.2	0.472±0.008		
P0	4.0±0.1	0.157±0.004		
P1	4.0±0.1	0.157±0.004		
P2 2.0±0.1		0.079±0.004		
D	Ф1.5±0.1	0.059±0.004		
d	Ф1.5±0.1	0.059±0.004		
Е	1.75±0.1	0.069±0.004		
F	5.5±0.05	0.217±0.002		
D1	178.0	7.007		
D0	13.0	0.512		
W1	15.0	0.591		
Quantity:1500PCS / inner box				





Revised: 2019-08-28