

## General Description

The LTA8151, LTA8152 and LTA8154 (LTA815x) are a family of zero-drift, micro-power, rail-to-rail output operational amplifiers capable of operating on wide supplies ranging from +4.5 V ( $\pm 2.25$  V) to +48 V ( $\pm 24$  V). The LTA815x op-amps use Linearin's proprietary auto-zeroing techniques to offer outstanding dc precision and ac performance, including low offset voltage (30  $\mu$ V maximum), near zero-drift over time and temperature, 1 MHz bandwidth, and 0.41  $\mu$ V<sub>pp</sub> input voltage noise at 0.1 Hz to 10 Hz. These high-precision, low-quiescent-current op-amps offer high input impedance and rail-to-rail output swing within 10 mV of the rails. The input common-mode range includes the negative rail.

The single version LTA8151 device is available in micro-size MSOP-8L, SOT-23-5L, and SOIC-8L packages. The dual version LTA8152 device is offered in MSOP-8L and SOIC-8L packages. The quad version LTA8154 device is offered in SOIC-14L and TSSOP-14L packages. All versions are specified for operation from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .


## Features and Benefits

- High DC Precision
  - $\pm 30$   $\mu$ V (maximum)  $V_{OS}$  with a Drift of  $\pm 50$  nV/ $^{\circ}\text{C}$
  - CMRR: 130 dB
  - PSRR: 132 dB
  - $A_{VOL}$ : 136 dB
  - $V_{n}$ : 0.41  $\mu$ V<sub>pp</sub> (typical, 0.1 to 10 Hz)
- Wide Supply:  $\pm 2.25$  V to  $\pm 24$  V, 4.5 V to 48 V
- Gain Bandwidth: 1 MHz
- Slew Rate: 0.56 V/ $\mu$ s
- Low Quiescent Current: 142  $\mu$ A per amplifier
- Low Bias Current:  $\pm 150$  pA
- Rail-to-Rail Output Operation

## Applications

- High-Side and Low-Side Current Sensing
- Transducer Amplifiers
- Precision Active Filters
- Programmable Logic Controllers
- Test and Measurement Equipment
- Multiplexed Data-Acquisition Systems
- Tracking Amplifier in Power Modules
- Power Delivery: UPS, Server, and Merchant Network Power

## Pin Configuration (Top View)

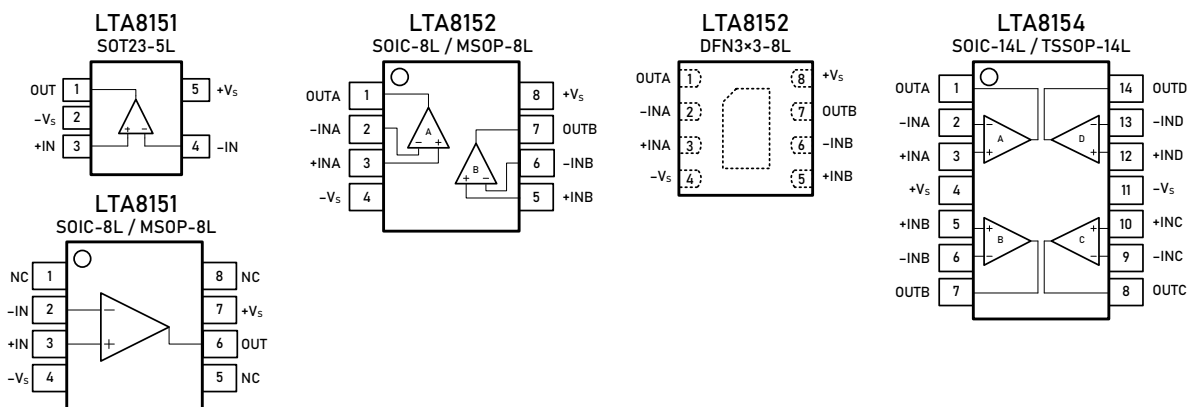

## Pin Description

Symbol	Description
-IN	Inverting input of the amplifier. The voltage range is from $V_{S-}$ to $V_{S+} - 1.5$ V.
+IN	Non-inverting input of the amplifier. This pin has the same voltage range as -IN.
+ $V_S$	Positive power supply. The voltage is from 4.5 V to 48 V. Split supplies are possible as long as the voltage between $V_{S+}$ and $V_{S-}$ is from 4.5 V to 48 V.
- $V_S$	Negative power supply. It is normally tied to ground. It can also be tied to a voltage other than ground as long as the voltage between $V_{S+}$ and $V_{S-}$ is from 4.5 V to 48 V.
OUT	Amplifier output.
NC	No connection

## Ordering Information <sup>(1)</sup>

Type Number	Package Name	Package Quantity	Eco Class <sup>(2)</sup>	Marking Code <sup>(3)</sup>
LTA8151XT5/R6	SOT23-5L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	Z51
LTA8151XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	ZHV51
LTA8151XV8/R6	MSOP-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	ZHV51
LTA8152XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	ZHV52
LTA8152XV8/R6	MSOP-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	ZHV52
LTA8152XF8/R10	DFN3x3-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	ZHV52
LTA8154XS14/R5	SOIC-14L	Tape and Reel, 2 500	Green (RoHS & no Sb/Br)	ZHV54
LTA8154XT14/R6	TSSOP-14L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	ZHV54

(1) Please contact to your Linearin representative for the latest availability information and product content details.

(2) Eco Class - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & Halogen Free).

(3) There may be multiple device markings, a varied marking character of "x" , or additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

## Limiting Value - In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Absolute Maximum Rating
Supply Voltage, $V_{S+}$ to $V_{S-}$	60 V
Signal Input Terminals: Voltage, Current	$-V_S - 0.3$ V to $+V_S + 0.3$ V, $\pm 10$ mA
Output Short-Circuit	Continuous
Storage Temperature Range, $T_{stg}$	$-65$ to $+150$ °C
Junction Temperature, $T_J$	150 °C
Lead Temperature Range (Soldering 10 sec)	260 °C

## ESD Rating

Parameter	Item	Value	Unit
Electrostatic Discharge Voltage	Human body model (HBM), per MIL-STD-883J / Method 3015.9 <sup>(1)</sup>	2 000	V
	Charged device model (CDM), per ESDA/JEDEC JS-002-2014 <sup>(2)</sup>	2 000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible if necessary precautions are taken.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible if necessary precautions are taken.

## Electrical Characteristics

$V_S = 4.5 \text{ V to } 48 \text{ V}$ ,  $T_A = +25 \text{ }^\circ\text{C}$ ,  $V_{CM} = V_S/2$ ,  $V_O = V_S/2$ , and  $R_L = 10 \text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted. Boldface limits apply over the specified temperature range,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ .

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>OFFSET VOLTAGE</b>						
Input offset voltage	$V_{OS}$			$\pm 10$	$\pm 30$	$\mu\text{V}$
Offset voltage drift	$V_{OS} \text{ TC}$	$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		$\pm 50$		$\text{nV}/^\circ\text{C}$
Power supply rejection ratio	PSRR	$V_S = 4.5 \text{ to } 48 \text{ V}$ , $V_{CM} = 0.1 \text{ V}$		132		dB
		$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		120		
<b>INPUT BIAS CURRENT</b>						
Input bias current	$I_B$			150		pA
		$T_A = -40 \text{ to } +85 \text{ }^\circ\text{C}$		600		
		$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		3000		
Input offset current	$I_{OS}$			300		pA
<b>NOISE</b>						
Input voltage noise	$V_n$	$f = 0.1 \text{ to } 10 \text{ Hz}$		0.41		$\mu\text{V}_{P-P}$
Input voltage noise density	$e_n$	$f = 10 \text{ Hz}$		22		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 1 \text{ kHz}$		22		
Input current noise density	$I_n$	$f = 1 \text{ kHz}$		10		$\text{fA}/\sqrt{\text{Hz}}$
<b>INPUT VOLTAGE</b>						
Common-mode voltage range	$V_{CM}$		$-V_S$		$+V_S-1.5$	V
Common-mode rejection ratio	CMRR	$V_{S-} < V_{CM} < V_{S+}-1.5 \text{ V}$		130		dB
		$V_{S-}+0.5 < V_{CM} < V_{S+}-1.5 \text{ V}$		139		
		$V_{S-}+0.5 < V_{CM} < V_{S+}-1.5 \text{ V}$ , $V_S = \pm 20 \text{ V}$ , $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		122		
<b>INPUT IMPEDANCE</b>						
Input capacitance	$C_{IN}$	Differential		3		pF
		Common mode		4.5		
<b>OPEN-LOOP GAIN</b>						
Open-loop voltage gain	$A_{VOL}$	$V_{S-}+0.5 < V_O < V_{S+}-0.5 \text{ V}$		136		dB
		$V_{S-}+0.5 < V_O < V_{S+}-0.5 \text{ V}$ , $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		126		
<b>FREQUENCY RESPONSE</b>						
Gain bandwidth product	GBW			1		MHz
Slew rate	SR	$G = +1$		0.56		$\text{V}/\mu\text{s}$
Total harmonic distortion + noise	THD+N	$G = +1$ , $f = 1 \text{ kHz}$ , $V_O = 3 V_{RMS}$		0.0002		%
Settling time	$t_S$	To 0.1%, $V_S = 40 \text{ V}$ , $G = +1$ , 5 V step		22		$\mu\text{s}$
		To 0.01%, $V_S = 40 \text{ V}$ , $G = +1$ , 5 V step		30		
Overload recovery time	$t_{OR}$	$V_{IN} \times \text{Gain} > V_S$		2		$\mu\text{s}$


## Electrical Characteristics (continued)

$V_S = 4.5 \text{ V to } 48 \text{ V}$ ,  $T_A = +25 \text{ }^\circ\text{C}$ ,  $V_{CM} = V_S/2$ ,  $V_O = V_S/2$ , and  $R_L = 10 \text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted. Boldface limits apply over the specified temperature range,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ .


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<i>OUTPUT</i>						
High output voltage swing	$V_{OH}$	$R_L = 10 \text{ k}\Omega$		$+V_S-100$		mV
		$R_L = 2 \text{ k}\Omega$		$+V_S-270$		
Low output voltage swing	$V_{OL}$	$R_L = 10 \text{ k}\Omega$		$-V_S+60$		mV
		$R_L = 2 \text{ k}\Omega$		$-V_S+250$		
Short-circuit current	$I_{SC}$			$\pm 45$		mA
<i>POWER SUPPLY</i>						
Operating supply voltage	$V_S$	$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$	4.5		48	V
Quiescent current (per amplifier)	$I_Q$	$V_S = 5 \text{ V}$		142		$\mu\text{A}$
		$V_S = 36 \text{ V}$		160		
<i>THERMAL CHARACTERISTICS</i>						
Operating temperature range	$T_A$		-40		+125	$^\circ\text{C}$
Package Thermal Resistance	$\theta_{JA}$	SOT23-5L		190		$^\circ\text{C/W}$
		MSOP-8L		201		
		SOIC-8L		125		
		TSSOP-14L		112		
		SOIC-14L		115		

### Typical Performance Characteristics


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , and  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , unless otherwise noted.

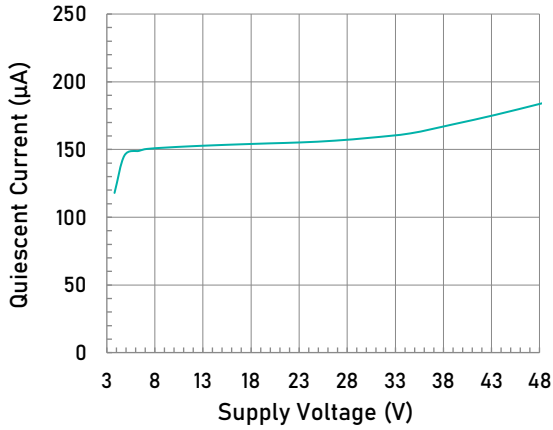


Quiescent Current as a function of Supply Voltage

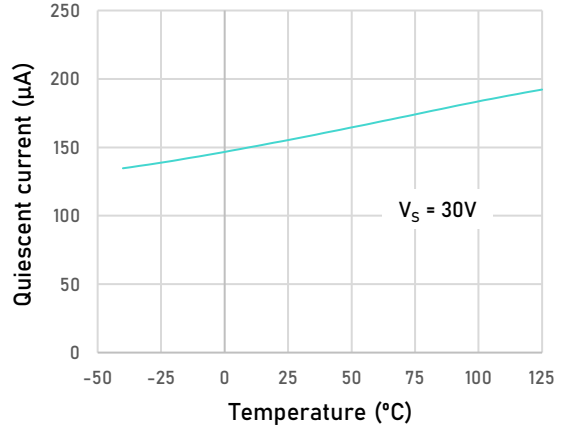


Quiescent Current as a function of Temperature

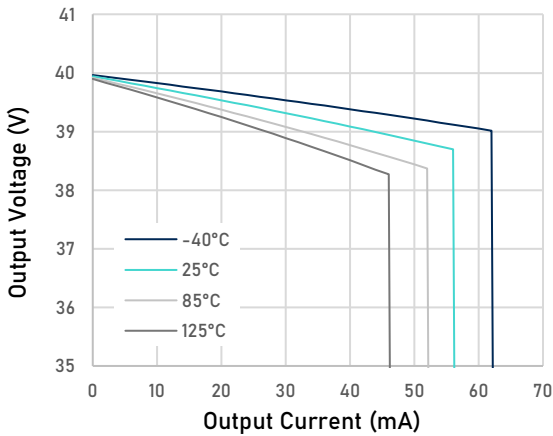


Output Voltage Swing as a function of Output Current (Sourcing,  $V_S = 40\text{ V}$ )

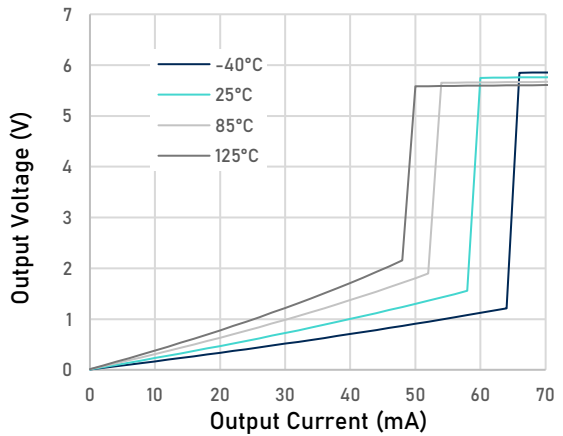

Output Voltage Swing as a function of Output Current (Sinking,  $V_S = 40\text{ V}$ )

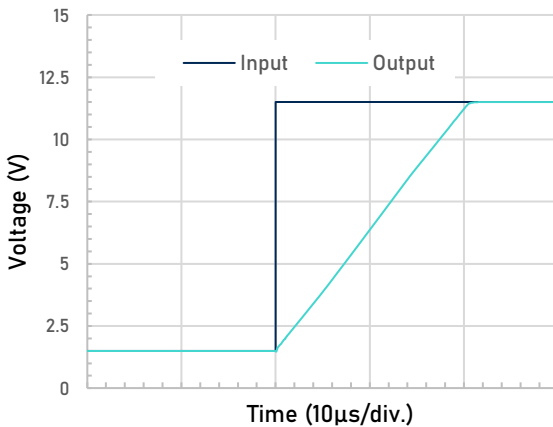

Large-Signal Step Response (Failing)

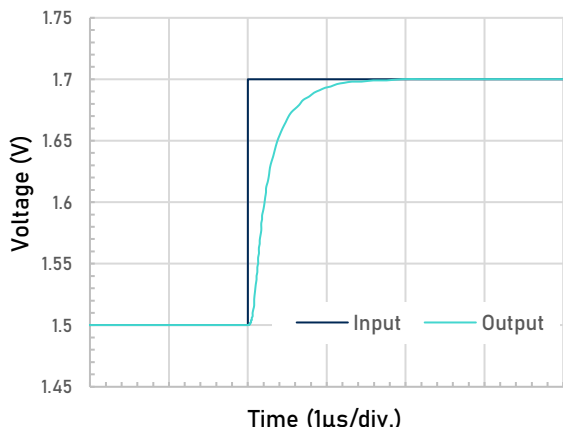


Small-Signal Step Response


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
Linearin and designs are registered trademarks of Linearin Technology Corporation.  
© Copyright Linearin Technology Corporation. All Rights Reserved.  
All other trademarks mentioned are the property of their respective owners.

### Tape and Reel Information

#### REEL DIMENSIONS

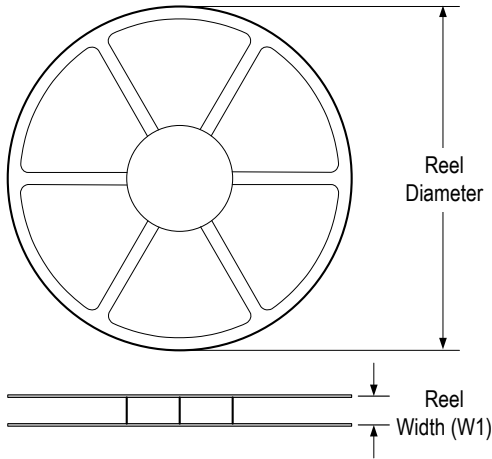


#### TAPE DIMENSIONS

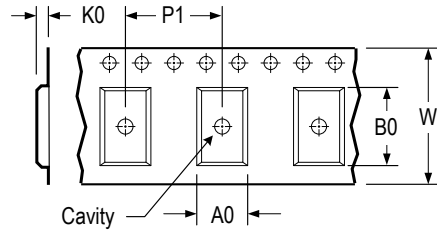

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

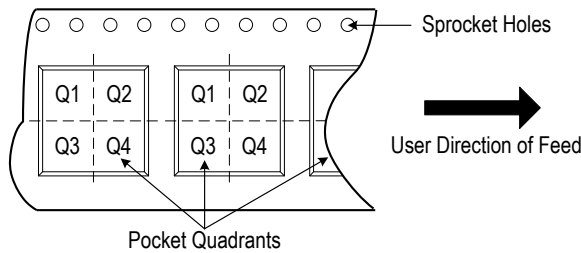


\* All dimensions are nominal


Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin 1 Quadrant
LTA8151XT5/R6	SOT23	5	3 000	178	9.0	3.3	3.2	1.5	4.0	8.0	Q3

### Package Outlines

#### DIMENSIONS, SOT23-5L

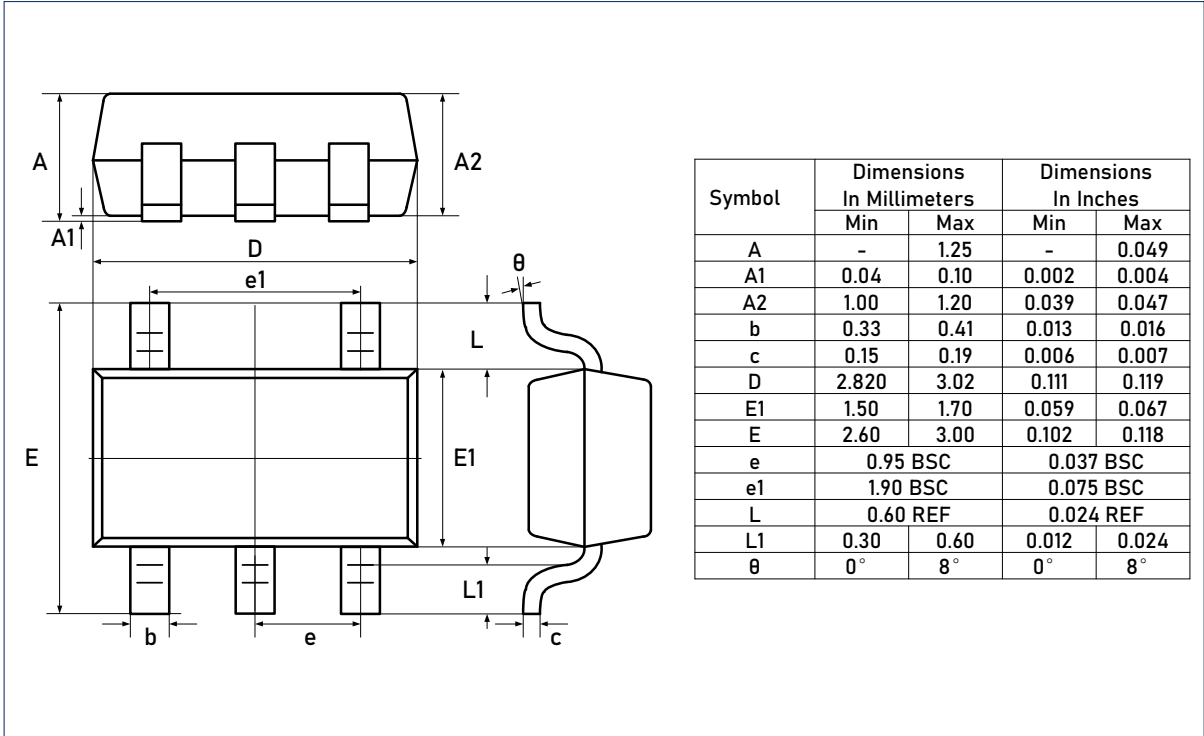


#### RECOMMENDED SOLDERING FOOTPRINT, SOT23-5L

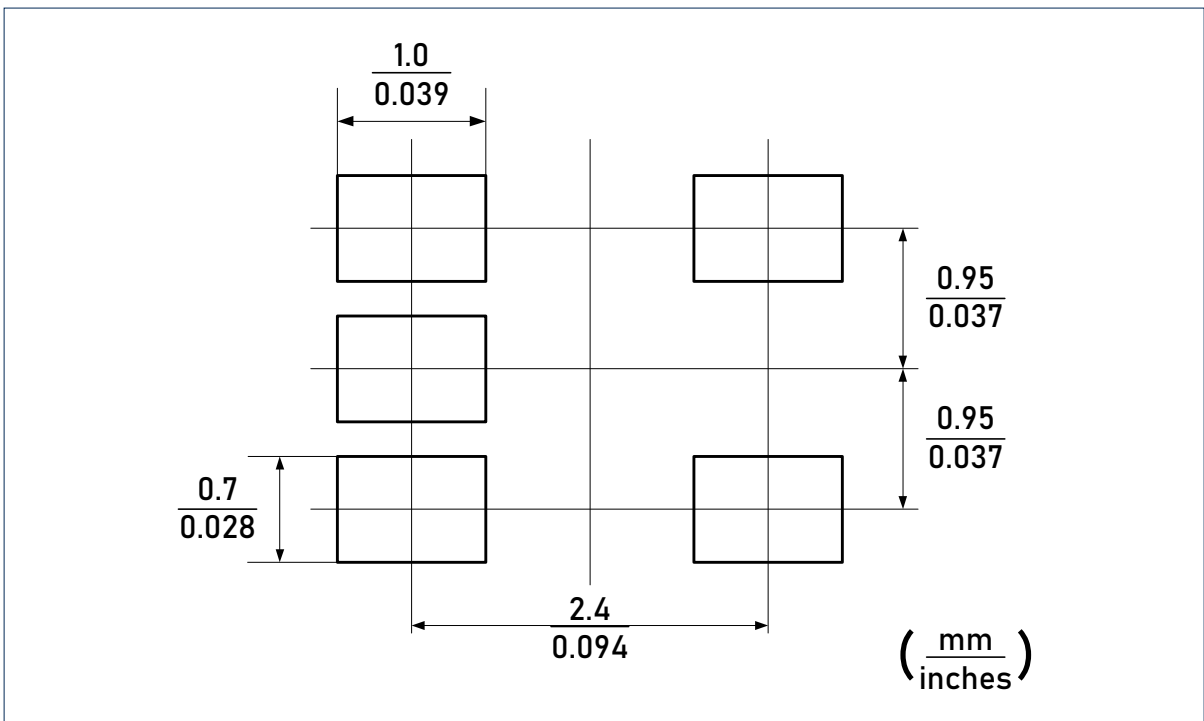


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
Linearin and designs are registered trademarks of Linearin Technology Corporation.  
© Copyright Linearin Technology Corporation. All Rights Reserved.  
All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, SOIC-8L

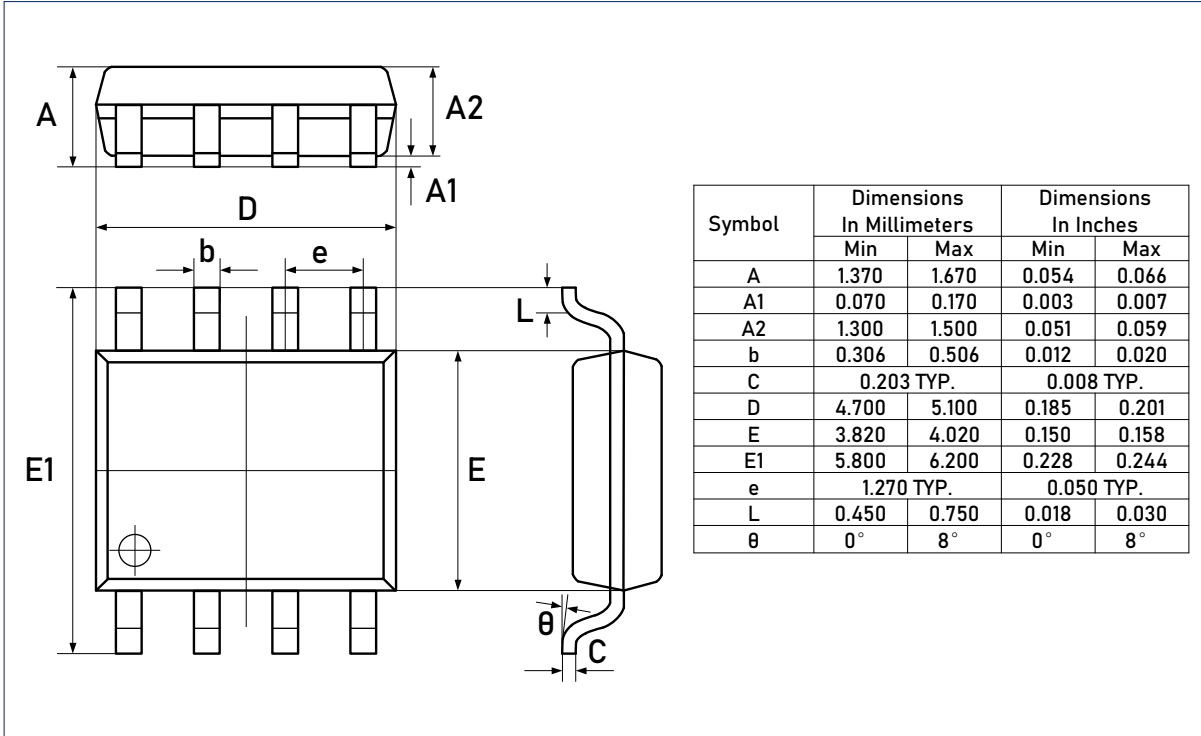

RECOMMENDED SOLDERING FOOTPRINT, SOIC-8L

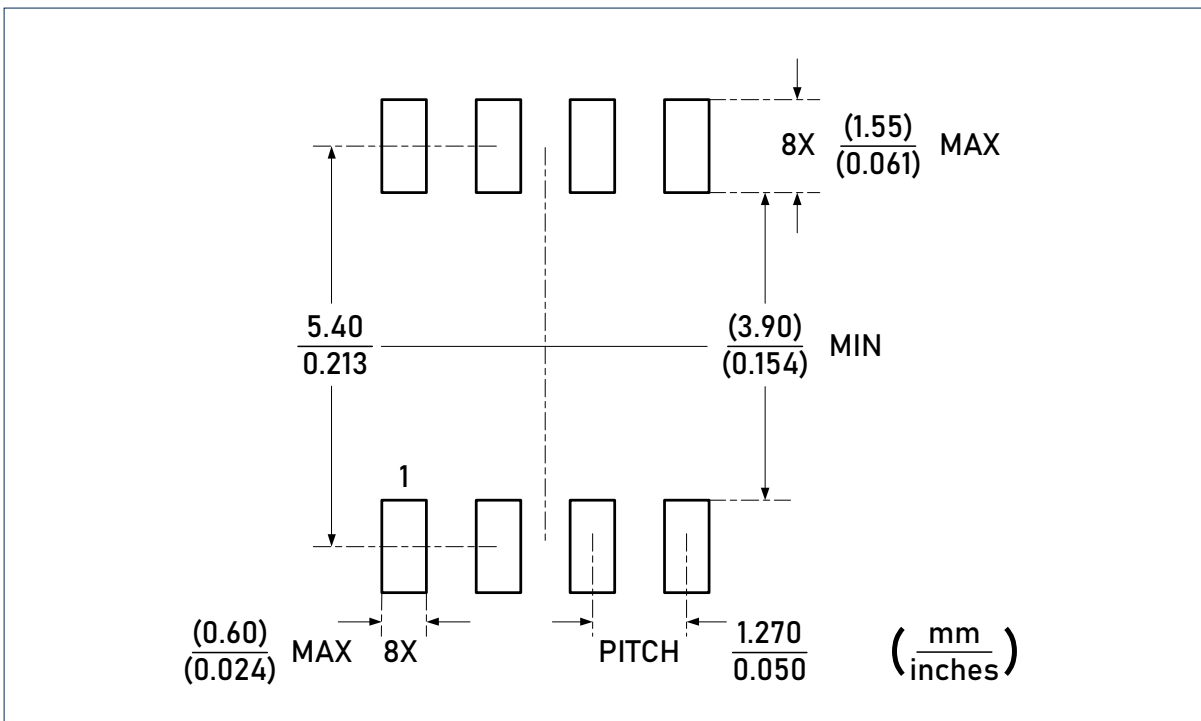


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.




Package Outlines (continued)

DIMENSIONS, MSOP-8L

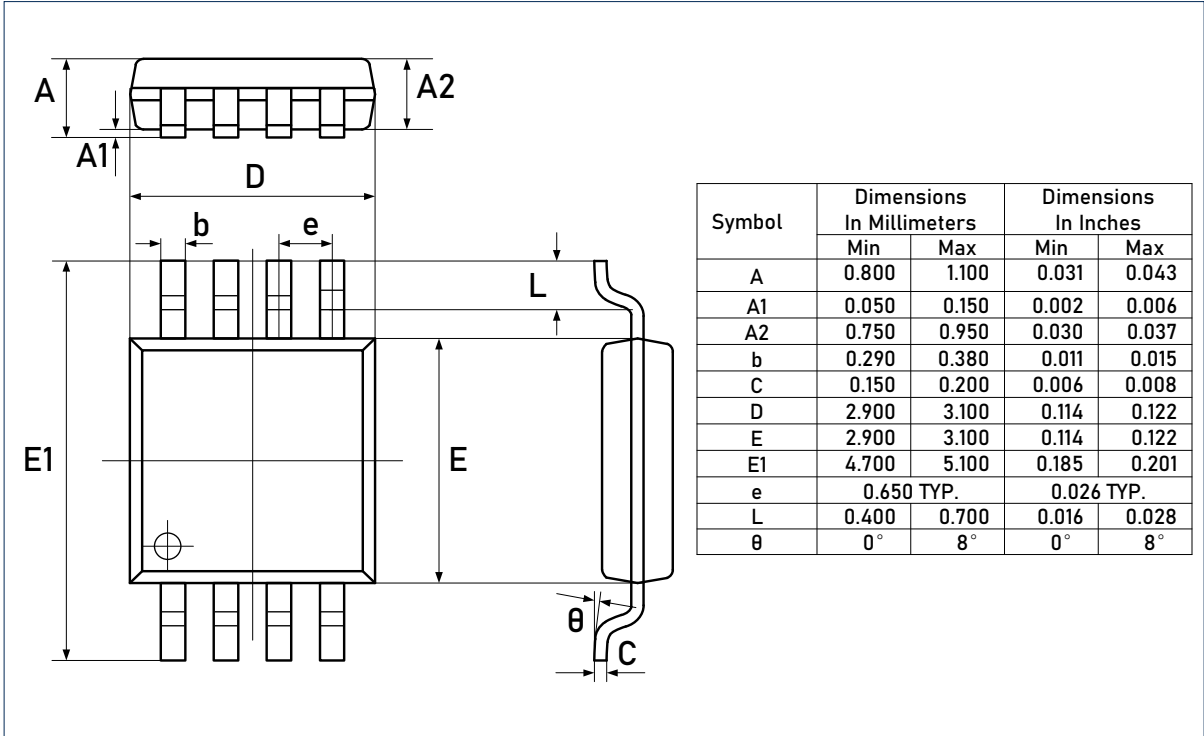


RECOMMENDED SOLDERING FOOTPRINT, MSOP-8L

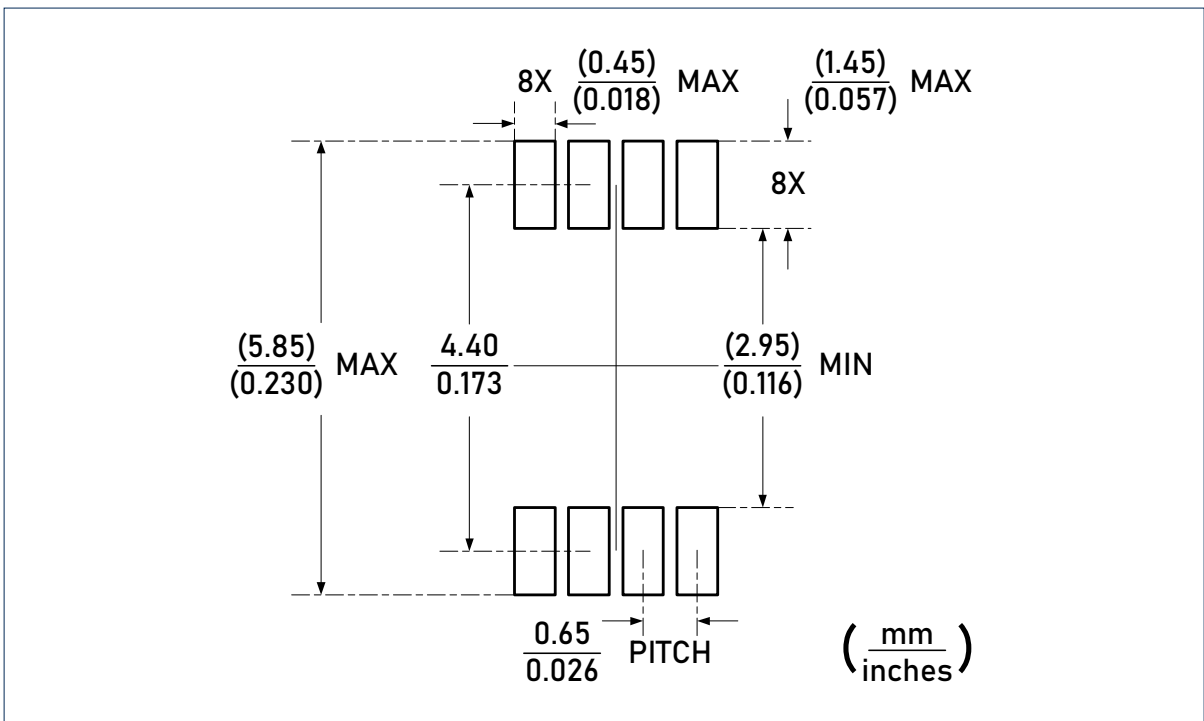

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.


Package Outlines (continued)

DIMENSIONS, DFN3x3-8L

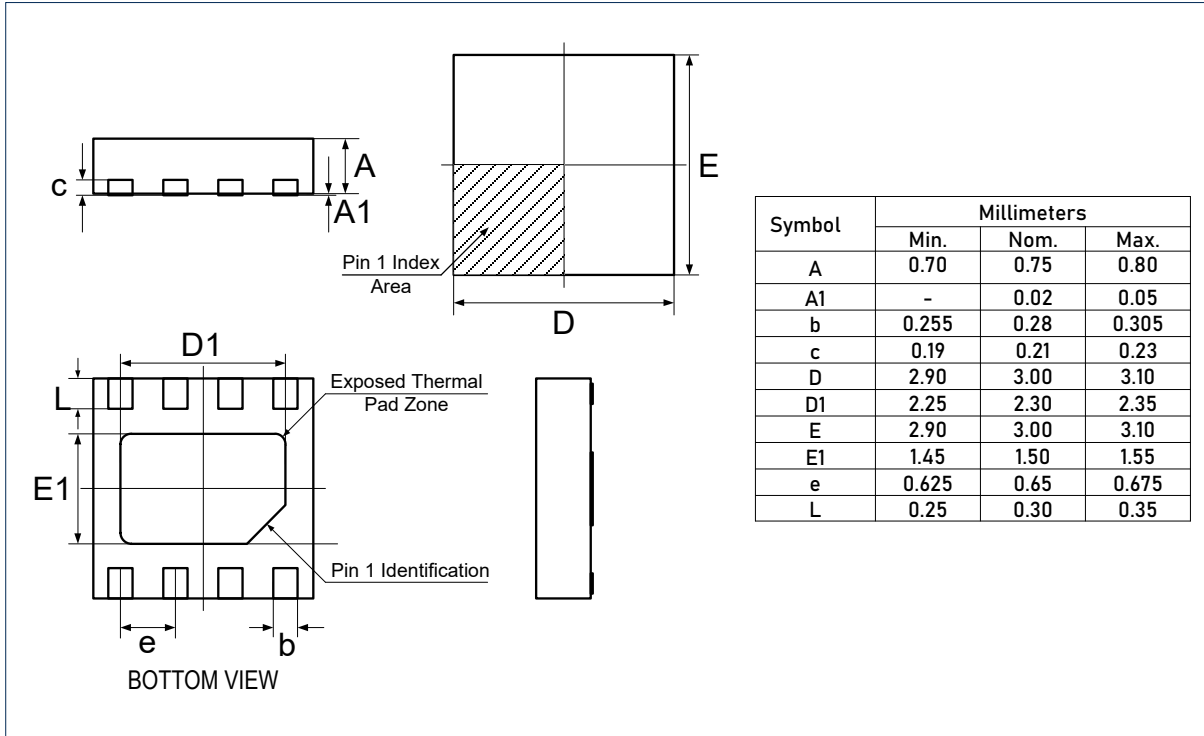


Package Outlines (continued)

DIMENSIONS, SOIC-14L

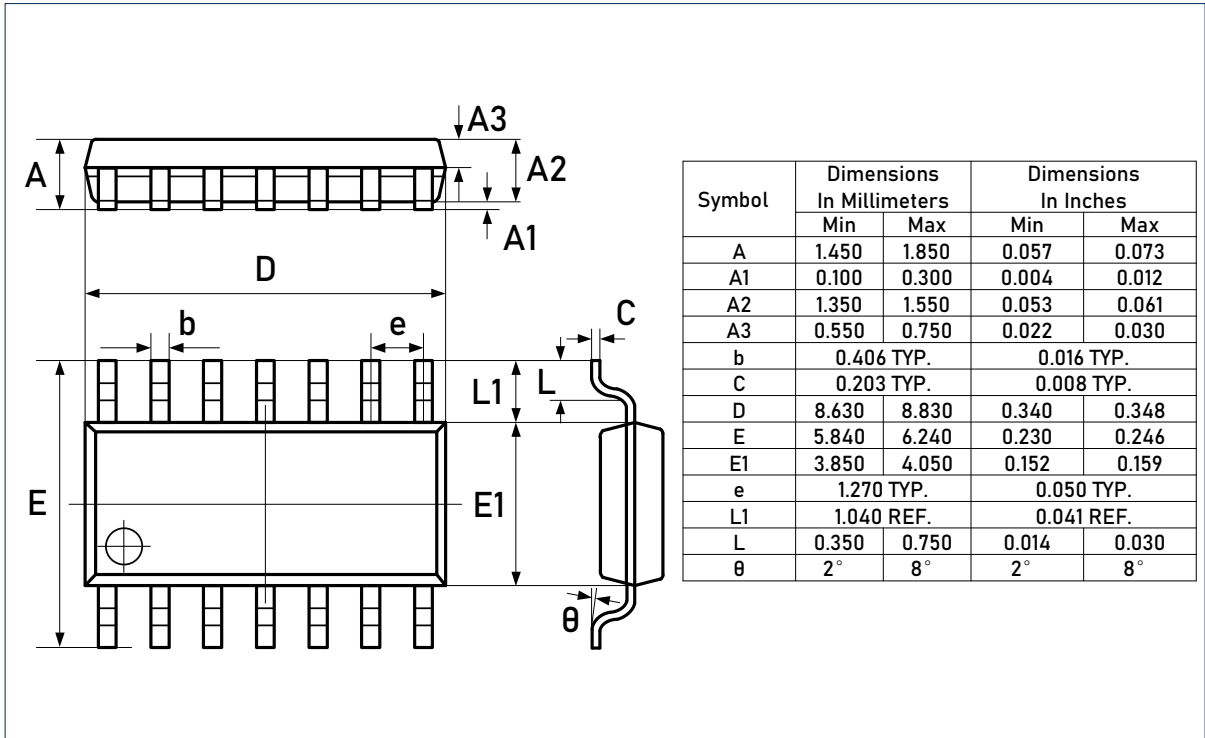


RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

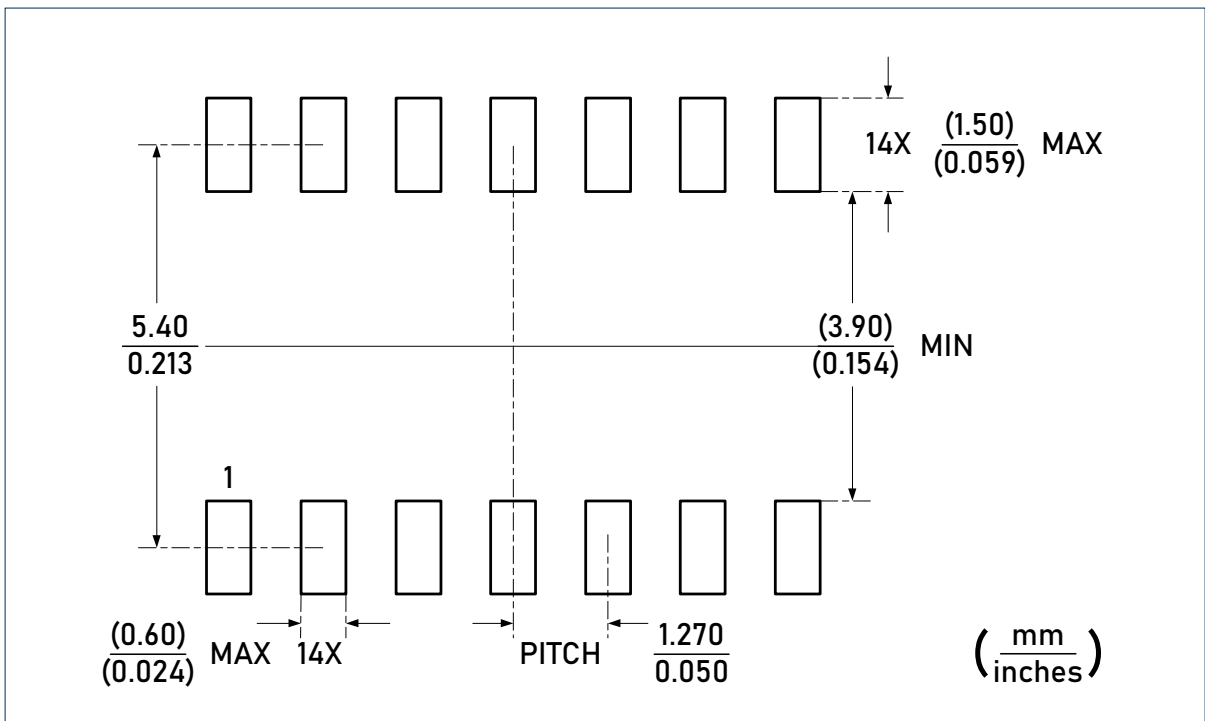


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
 Linearin and designs are registered trademarks of Linearin Technology Corporation.  
 © Copyright Linearin Technology Corporation. All Rights Reserved.  
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, TSSOP-14L

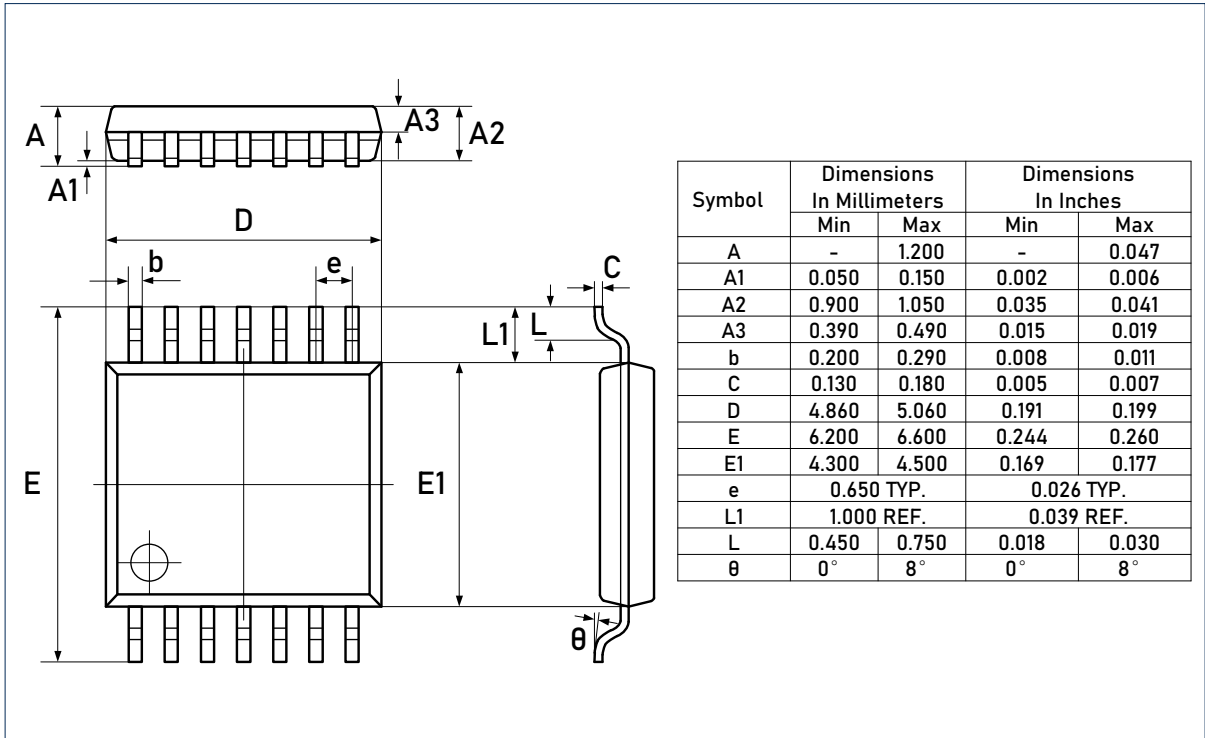

RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

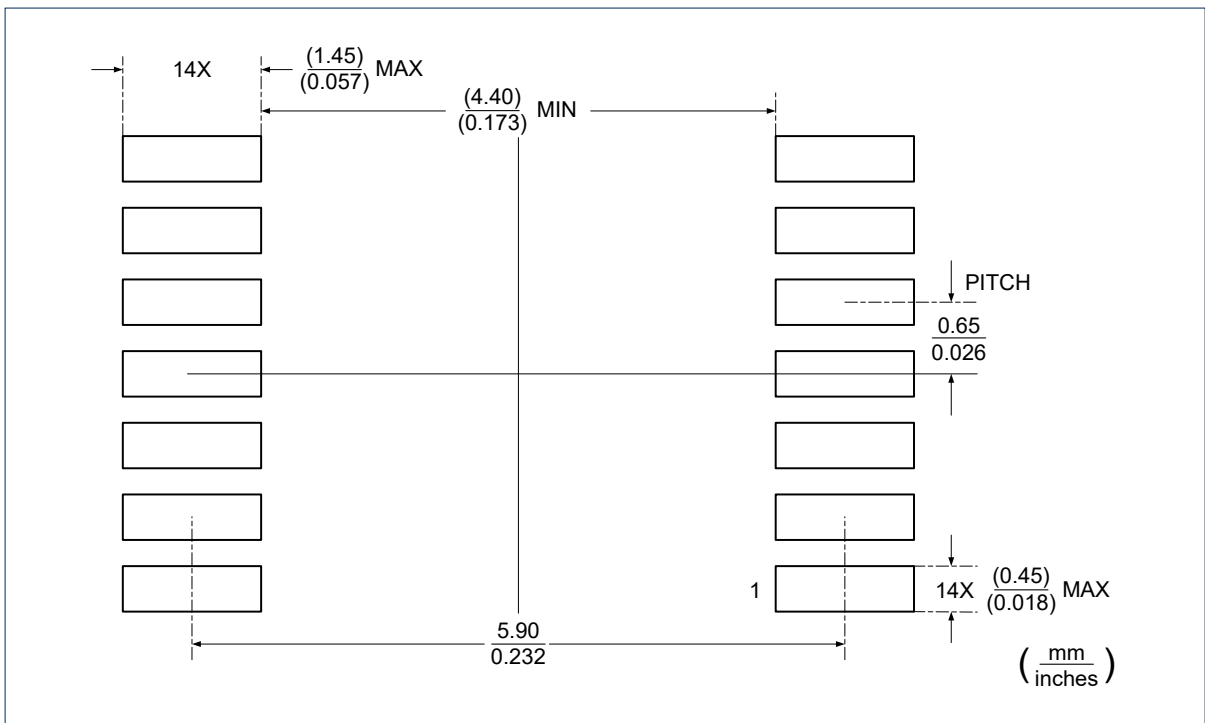

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.  
Linearin and designs are registered trademarks of Linearin Technology Corporation.  
© Copyright Linearin Technology Corporation. All Rights Reserved.  
All other trademarks mentioned are the property of their respective owners.

## Important Notice

---

Linearin is a global fabless semiconductor company specializing in advanced high-performance high-quality analog/mixed-signal IC products and sensor solutions. The company is devoted to the innovation of high performance, analog-intensive sensor front-end products and modular sensor solutions, applied in multi-market of medical & wearable devices, smart home, sensing of IoT, intelligent industrial & smart factory (industrie 4.0), and automotives. Linearin's product families include widely-used standard catalog products, solution-based application specific standard products (ASSPs) and sensor modules that help customers achieve faster time-to-market products. Go to <http://www.linearin.com> for a complete list of Linearin product families.

For additional product information, or full datasheet, please contact with the Linearin's Sales Department or Representatives.