





Data sheet | Item number: 788-166

Basic relay; Nominal input voltage: 110 VDC; 1 changeover contact; Limiting continuous current: 16 A; Module width: 13 mm; Module height: 15 mm

www.wago.com/788-166

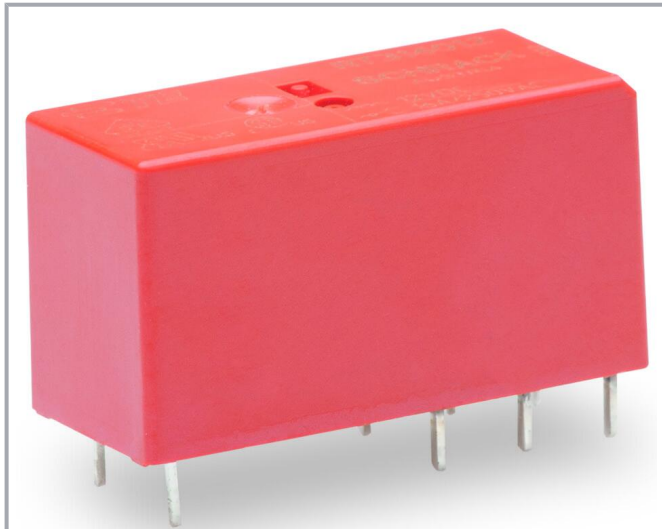

 Picture differs from the item.

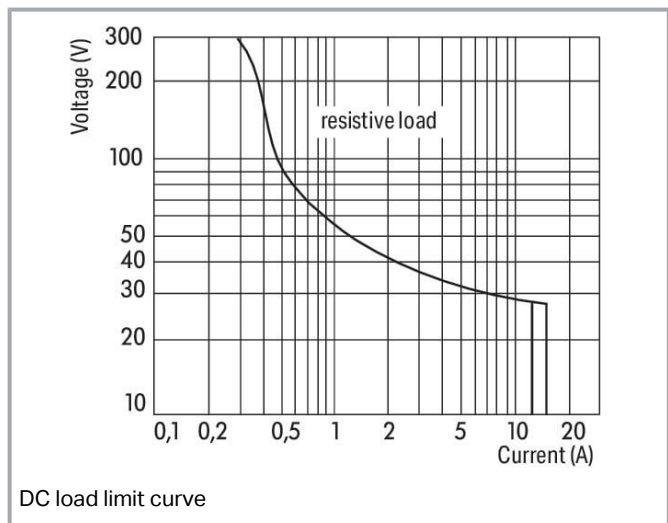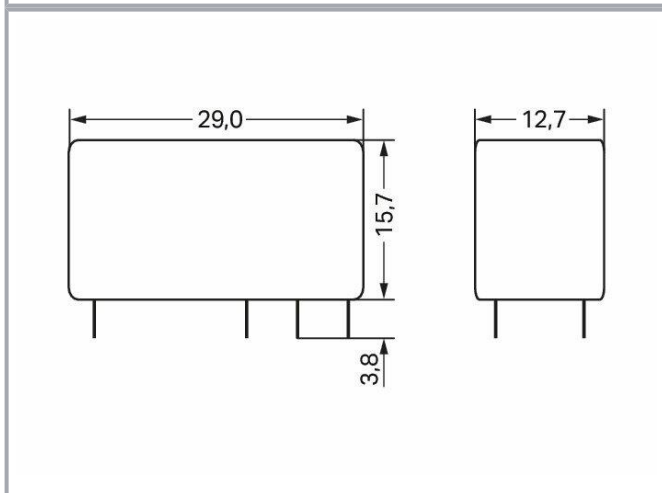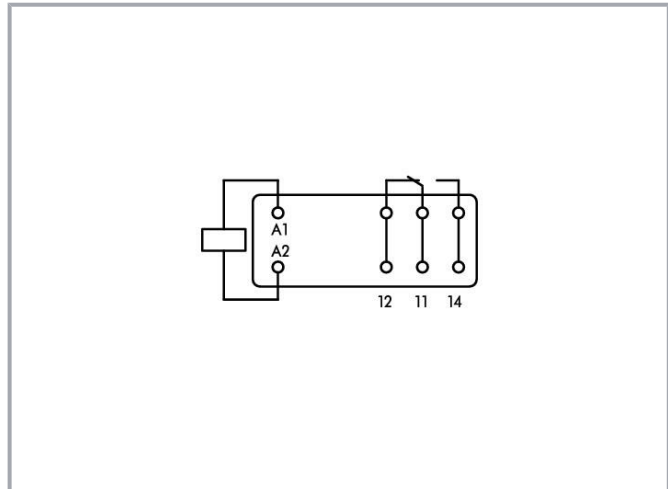

DC load limit curve

Data

Technical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Control circuit

Nominal input voltage U_N	DC 110 V
Nominal input current at U_N	4 mA

Load circuit

Number of changeover/switchover contacts	1
Contact material (relay)	AgNi 90/10
Limiting continuous current	16 A
Inrush current (resistive) max.	(AC) 30 A / 4 s
Switching voltage (max.)	AC 250 V
Switching power (resistive) max.	AC 4000 VA; DC (see load limit curve)
Switching capacity	AC-15: 6 A / AC 250 V; DC-13: 2 A / DC 24 V
Recommended minimum load	12 V / 10 mA
Pull-in time (typ.)	8 ms
Drop-out time (typ.)	6 ms
Bounce time (typ.)	6 ms
Electrical life (NO; resistive load; 23 °C)	30 x 10 ³ switching operations
Mechanical life	30 x 10 ⁶ switching operations
Switching frequency with/without load (max.)	6 min ⁻¹ / 1200 min ⁻¹

Safety and protection

Dielectric strength (control/load circuit) (AC, 1 min)	5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Protection type	IP40

Physical data

Width	12.7 mm / 0.5 inches
Height from the surface	15.7 mm / 0.618 inches
Depth	29 mm / 1.142 inches

Mechanical data

Mounting type	Pluggable module
---------------	------------------

Material data

Weight	13.5 g
--------	--------

Subject to changes. Please also observe the further product documentation!



Environmental requirements

Ambient temperature (operation at U_N)	-40 ... +85 °C
Ambient temperature (storage)	-40 ... +85 °C

Standards and specifications

Standards/specifications	EN 61810-1
--------------------------	------------

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 8.0	EC001437
ETIM 7.0	EC001437
ECCN	NO DATA
PU (SPU)	20 pcs
Packaging type	box
Country of origin	DE
GTIN	4050821867821
Customs tariff number	85364900990

Environmental Product Compliance

CAS-No.	80-05-7
REACH Candidate List Substance	4,4'-isopropylidenediphenol
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	16096d40-862a-4080-8e57-03dee13f3fce
SCIP notification number (Belgium)	28cd4897-4365-4fc4-be7f-161396e9444c
SCIP notification number (Bulgaria)	92ec6987-1918-46e2-ab8c-396f1b48a543
SCIP notification number (Czech Republic)	2479179b-3b45-451e-bd2b-761e4fb4b1e2
SCIP notification number (Denmark)	58acb7be-cae4-49b0-a2a8-d4b1e3aa208e
SCIP notification number (Finland)	e5fc0b12-024f-483b-9d59-f7897c9ae461
SCIP notification number (France)	9cb546f8-1a95-46af-818c-526138c5bbdb
SCIP notification number (Germany)	cf0c0be9-e526-4ac2-8ed0-7f7d102733c3
SCIP notification number (Hungary)	a2a4f7dd-3d79-4660-bf96-e54e1fa62a78
SCIP notification number (Italy)	a194b18e-32a4-4cd2-a8f1-1b86b75ac233
SCIP notification number (Netherlands)	ef453ad3-3acd-4e79-b5e9-8c8995d62a43

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Poland)	87467a93-31df-4b93-a3d3-fcc1dfc981cb
SCIP notification number (Romania)	2c17f364-cb62-4df0-9a2d-7287981f2716
SCIP notification number (Sweden)	80134039-1839-474a-a10f-4c9a1ed5f0fc

Optional accessories

Sockets

Socket without relay



Item no.: 788-100

Relay socket; 1 changeover contact; for 15 mm basic relays; gray

www.wago.com/788-100

Downloads

Documentation

Bid Text

788-166 docx - Datei	2019 Feb 20	docx 15.6 kB	Download
788-166 X81 - Datei	2019 Feb 19	xml 3.6 kB	Download

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 788-166	URL	Download
------------------------	-----	----------

CAD data

2D/3D Models 788-166	URL	Download
----------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 788-166	URL	Download
------------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 788-166	URL	Download
Basic relay; Nominal input voltage: 110 VDC; 1 changeover contact; Limiting continuous current: 16 A; Module width: 13 mm; Module height: 15 mm		

Installation Notes

Subject to changes. Please also observe the further product documentation!