




FEATURES


- Complementary to MMBT5401
- Ideal for Medium Power Amplification and Switching



1.BASE
2.EMITTER
3.COLLECTOR

Marking

Type number	Marking code
MMBT5551	G1

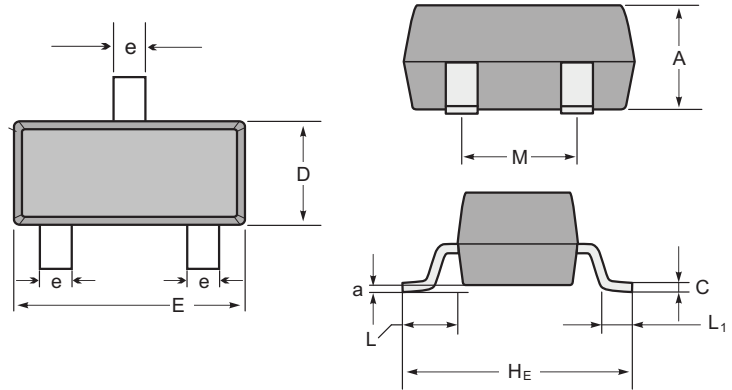

SOT-23 mechanical data

UNIT	A	C	D	E	H _E	e	M	L	L ₁	a	
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector–Base Voltage	V _{CB0}	180	V
Collector–Emitter Voltage	V _{CE0}	160	V
Emitter–Base Voltage	V _{EB0}	6	V
Collector Current — Continuous	I _C	600	mA
Collector Power Dissipation	P _C	300	mW
Thermal Resistance From Junction To Ambient	R _{thJA}	416	°C/W
Operation Junction and Storage Temperature Range	T _J , T _{stg}	-55~+150	°C

MMBT5551

CLASSIFICATION OF h_{FE}

Rank	L	H
Range	100-200	200-300

ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted.)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100\mu A, I_E = 0$	180			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1\text{ mA}, I_B = 0$	160			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 120V, I_E = 0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 4V, I_C = 0$			50	nA
DC current gain	h_{FE1}	$V_{CE} = 5V, I_C = 1\text{ mA}$	80			
	h_{FE2}	$V_{CE} = 5V, I_C = 10\text{ mA}$	100		300	
	h_{FE3}	$V_{CE} = 5V, I_C = 50\text{ mA}$	50			
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 10\text{ mA}, I_B = 1\text{ mA}$			0.15	V
	$V_{CE(sat)2}$	$I_C = 50\text{ mA}, I_B = 5\text{ mA}$			0.2	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = 10\text{ mA}, I_B = 1\text{ mA}$			1	V
	$V_{BE(sat)2}$	$I_C = 50\text{ mA}, I_B = 5\text{ mA}$			1	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 10\text{ mA}, f = 100\text{ MHz}$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1\text{ MHz}$			6	pF

RATING AND CHARACTERISTIC CURVES (MMBT5551)

