

# **GBU25005 THRU GBU2510**

Single Phase 25.0AMP Glass Passivated Bridge Rectifier

#### **Features**

· Glass passivated die construction

· Low forward voltage drop

· High current capability

· High surge current capability

Plastic material-UL flammability 94V-0

### **Mechanical Data**

· Case: GBU, molded plastic


 Terminals: Plated Leads Solderable per MIL-STD-202, Method 208

Polarity: As Marked on Case

Mounting Position: Any

Marking: Type Number

Lead Free: For RoHS / Lead Free Version

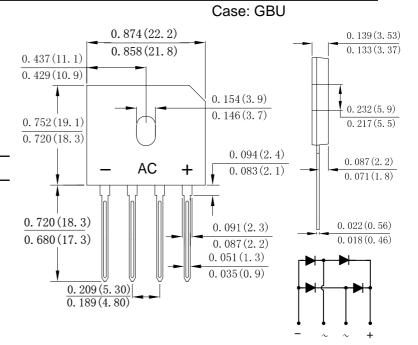

dimensions in inches and (millimeters)

### **Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified. Single Phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	GBU 25005	GBU 2501	GBU 2502	GBU 2504	GBU 2506	GBU 2508	GBU 2510	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	VRRM VRWM VDC	50	100	200	400	600	800	1000	٧
RMS Reverse Voltage	VRMS	35	70	140	280	420	560	700	V
Average Rectified Output Current (with heatsink) $@T_C = 90^{\circ}C$ (without heatsink)	) IF(AV)	25.0 3.6							А
Non-Repetitive Peak Forward Surge Current @TJ=25° 8.3ms Single half sine-wave superimposed @TJ=125° on rated load (JEDEC Method)		350 280							Α
Non-Repetitive Peak Forward Surge @TJ=25°C Current 1 ms Single half sine-wave @TJ=125°C superimpose on rated load (JEDEC Method)	Iғsм	700 560						А	
Forward Voltage per element @IF=12.5A	V <sub>FM</sub>	1.0						V	
Peak Reverse Current @TJ=25℃ At Rated DC Blocking Voltage @TJ=125℃	lr	5.0 200							uA
I <sup>2</sup> t Rating for fusing (t <8.3ms)	l <sup>2</sup> t	508.375						A <sup>2</sup> s	
Dielectric Strength	Vids	2500							V
The proposed installation torque Max torque	Tor	5.0 8.0						Kgf.cm	
Typical Junction Capacitance (Note 1)	CJ				110				pF
	RөJA	28							
Typical Thermal Resistance		8.7							°C/W
		5.3							
Operating and Storage Temperature Range	T <sub>J</sub> ,Тsтg			-	55to+15	0			$^{\circ}\!\mathbb{C}$

Note: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

version:06 1 of 3



Average Forward Current (A)

IFSM, Peak Forward Surge Current (A)

Instantaneous Reverse Current(uA)

# **GBU25005 THRU GBU2510**

Single Phase 25.0AMP Glass Passivated Bridge Rectifier

Fig. 1 Forward Current Derating Curve



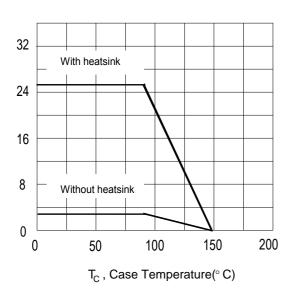


Fig.3 Maximum Peak Forward Surge Current

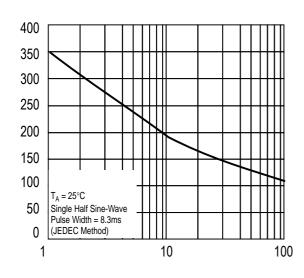

Number Of Cycles At 60HZ


Fig.5 Typical Reverse Characteristics

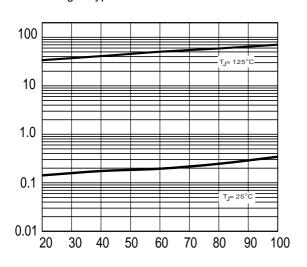

Percent Of Rated Peak Reverse Voltage(%)


2 of 3


Instantaneous Forward Current (A)

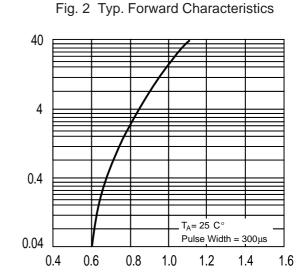

V , Instantaneous Forward Voltage (V)

Fig . 4 Typical Junction Capacitance



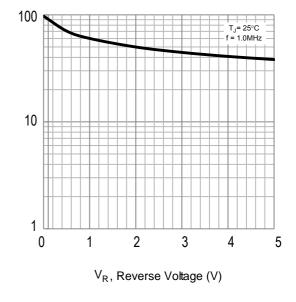

version:06



## **GBU25005 THRU GBU2510**

Single Phase 25.0AMP Glass Passivated Bridge Rectifier

## **Important Notice and Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from XINNUO
- XINNUO reserves the right to make changes to this document and its products and specifications
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications.
  - XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown here in are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own ris k andagree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.

version:06 3 of 3