

# 承認書

## SPECIFICATION FOR APPROVAL

客戶名稱  
CUSTOMER

客戶料號  
CUS. P/N

尺寸  
DIMENSION




**CRH-16x50.8x8**

編號  
SERIAL NO.

NO.1025657180

日期  
DATE

2023年5月6日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
		
DATE: 2023/5/6		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司

DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式

王小姐: 13556646144

洪先生: 13809826886

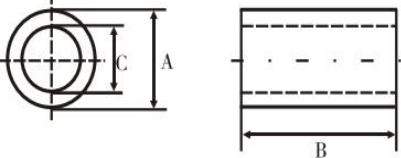
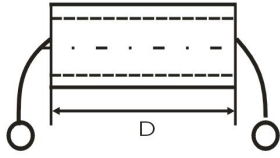



# 承認書

## SPECIFICATION FOR APPROVAL

規格 ITEM	CRH-16x50.8x8		編號 SERIAL NO.	NO.1025657180	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm);  			A	16.00 ± 0.5	mm
			B	50.80 ± 2.5	mm
			C	8.00 ± 0.4	mm
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ		測試儀器 TESTING INSTRUMENTS	
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=180 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=260 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%		4. L-METER: <input type="checkbox"/> TH-2775B
繞線: WINDING	Z: Φ 0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKAGE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤ 1mm <sup>2</sup>		
总缺陷面积 ALL area of the breakage			≤ 2mm <sup>2</sup>		
缺陷深度 The depth of the breakage			≤ 0.4mm		
毛刺长度 The length of burr			≤ 0.2mm		
4. 包裝 PACKAGING:  內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).					

# 檢 測 數 據

## INSPECTION DATA

規 格 ITEM	CRH-16x50.8x8					編 號 SERIAL NO.	NO.1025657180					
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): =  							<input type="checkbox"/> L					
							<input type="checkbox"/> Q					KHZ MHZ
							<input checked="" type="checkbox"/> Z	Z1=180 Ω MIN	KHZ	Z1=	KHZ MHZ	
								Z2=260 Ω MIN	KHZ	Z4=	KHZ MHZ	
							溫 度 TEMP	25±5°C	濕 度 HUMIDITY	60±8%		
							绕 线: WINDING	Z: Φ 0.5*100L(mm)*0.5TS				
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)					
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F
+			180	260			16	50.8	8			
-			0	0			0.5	2.5	0.4			
1			255.6	369.2			15.98	50.95	8.02			
2			256.1	357.2			15.94	50.85	8.02			
3			259.2	358.8			16.03	51.00	8.01			
4			263.3	353.6			15.97	51.46	8.04			
5			268.9	366.6			15.94	50.79	7.99			
6			255.8	358.8			16.06	51.51	7.98			
7			271.2	348.4			16.03	50.90	8.04			
8			277.3	371.8			16.00	51.05	8.04			
9			250.0	365.8			16.03	51.16	7.99			
10			194.4	410.6			16.02	51.36	8.00			
X			255.2	366.1			16.00	51.10	8.01			
Y/N			Y	Y			Y	Y	Y			
2. 測試儀器 TESTING INSTRUMENTS HP 4191A  							檢 測 INSPECTION	復 核 CHECK	確 認 APPROVAL			
												

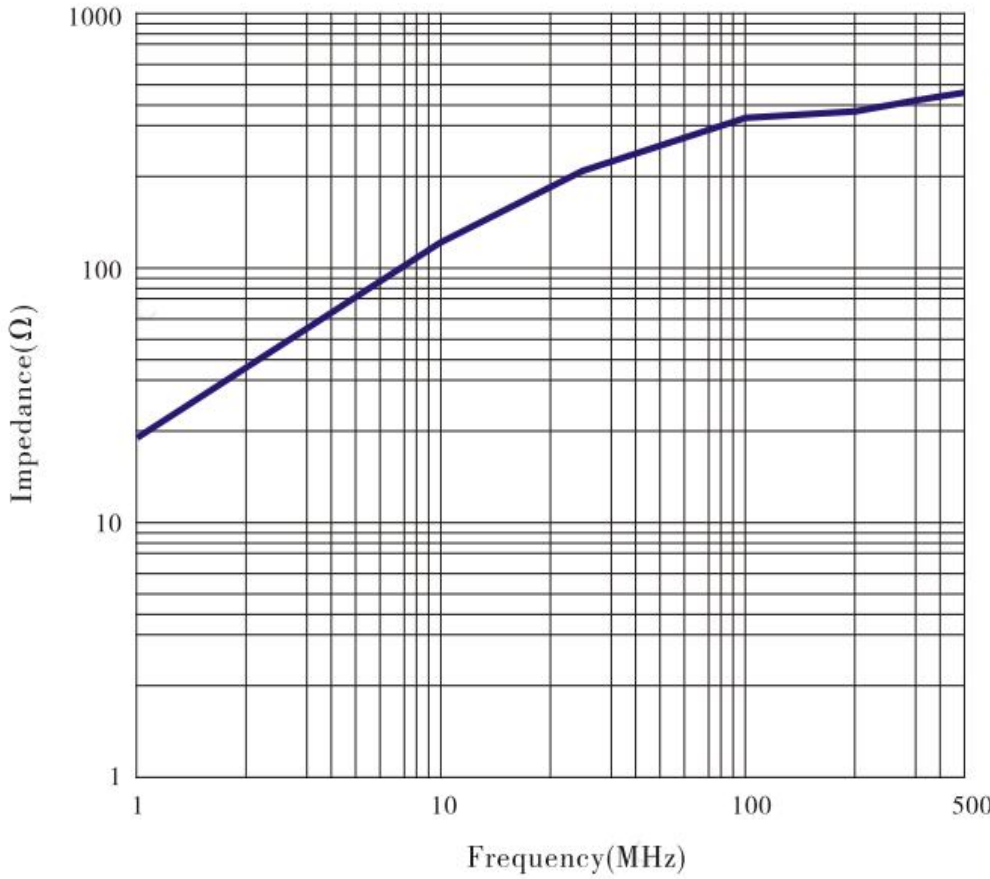
# 阻抗 - 頻率曲綫




IMPEDANCE V.S.FREQUENCY ( Z-Y )

規格 ITEM	CRH-16x50. 8x8	編號 SERIAL NO.	NO.1025657180
------------	----------------	------------------	---------------

材质特性：  
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc y Range	密度 Densit y
Unit symbol	$\mu_i$ $\pm 20\%$	$\tan \delta / \mu_i$ $\times 10^{-6}$	$\alpha \mu_i \gamma$ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	$\rho$ ( $\Omega \cdot m$ )	F Mhz	d g/cm <sup>3</sup>
F9	850	16(0.1MHz)	5-10	350(1600A/m)	200	20	>110	>10 <sup>5</sup>	0.1-1.5	4.9



测试条件； TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	确 認 APPROVAL
1. 测试仪器： HP 4191A Testing Equipment:			
2. 测试频率区间： 1MHZ-1000MHZ Testing Frequency Range:			
3. 测试绕组： Φ0.5*100L(mm)*0.5TS Testing Coil Specification:			