

## 1 Ampere Surface Mount Schottky Barrier Rectifier




## SS12F-SS120F

## Features:

- ☐ Metal silicon junction, majority carrier conduction
- ☐ For surface mounted applications
- ☐ Low power loss, high efficiency
- ☐ Fast switching for high efficiency
- ☐ High forward surge current capability
- ☐ For use in low voltage, high frequency inverters

SMAF



## Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter                                                                                               | Symbols         | SS12F      | SS14F | SS16F | SS18F    | SS110F | SS112F | SS115F   | SS120F | Units |
|---------------------------------------------------------------------------------------------------------|-----------------|------------|-------|-------|----------|--------|--------|----------|--------|-------|
| Maximum Repetitive Peak Reverse Voltage                                                                 | $V_{RRM}$       | 20         | 40    | 60    | 80       | 100    | 120    | 150      | 200    | V     |
| Maximum RMS voltage                                                                                     | $V_{RMS}$       | 14         | 28    | 42    | 56       | 70     | 84     | 105      | 140    | V     |
| Maximum DC Blocking Voltage                                                                             | $V_{DC}$        | 20         | 40    | 60    | 80       | 100    | 120    | 150      | 200    | V     |
| Maximum Average Forward Rectified Current                                                               | $I_{F(AV)}$     | 1.0        |       |       |          |        |        |          |        | A     |
| Peak Forward Surge Current, 8.3ms<br>Single Half Sine-wave Superimposed<br>on Rated Load (JEDEC method) | $I_{FSM}$       | 25         |       |       |          |        |        |          |        | A     |
| Max Instantaneous Forward Voltage at 1 A                                                                | $V_F$           | 0.55       | 0.70  | 0.85  |          |        | 0.90   |          | V      |       |
| Maximum DC Reverse Current $T_a = 25^{\circ}C$<br>at Rated DC Reverse Voltage $T_a = 100^{\circ}C$      | $I_R$           | 0.3<br>10  |       |       | 0.2<br>5 |        |        | 0.1<br>2 |        | mA    |
| Typical Junction Capacitance <sup>(1)</sup>                                                             | $C_j$           | 110        | 80    |       |          |        |        |          |        | pF    |
| Typical Thermal Resistance <sup>(2)</sup>                                                               | $R_{\theta JA}$ | 95         |       |       |          |        |        |          |        | °C/W  |
| Operating Junction Temperature Range                                                                    | $T_j$           | -55 ~ +125 |       |       |          |        |        |          |        | °C    |
| Storage Temperature Range                                                                               | $T_{stg}$       | -55 ~ +150 |       |       |          |        |        |          |        | °C    |

( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

## Typical Characteristics

Fig.1 Forward Current Derating Curve

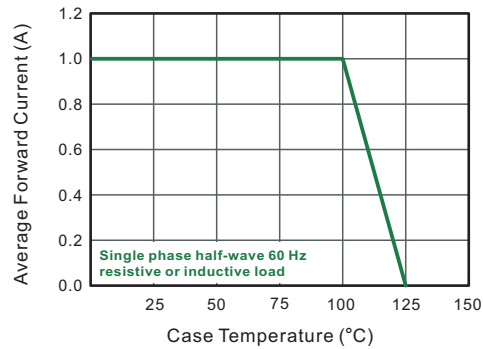


Fig.2 Typical Reverse Characteristics

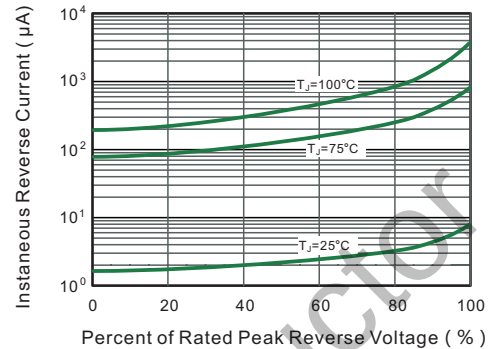


Fig.3 Typical Forward Characteristic

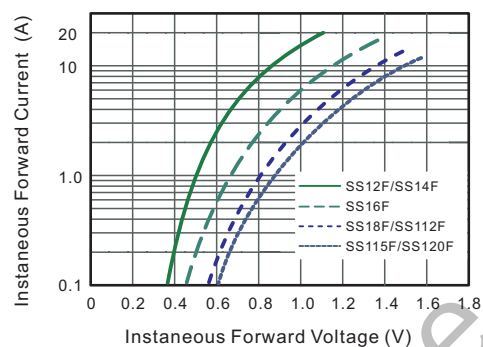


Fig.4 Typical Junction Capacitance

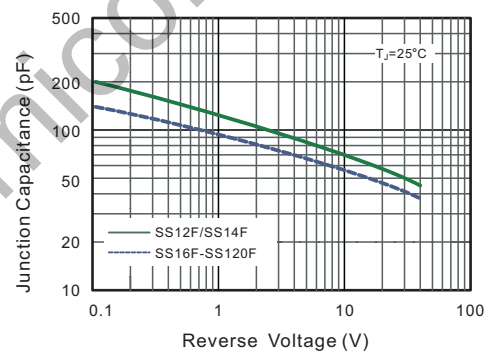


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



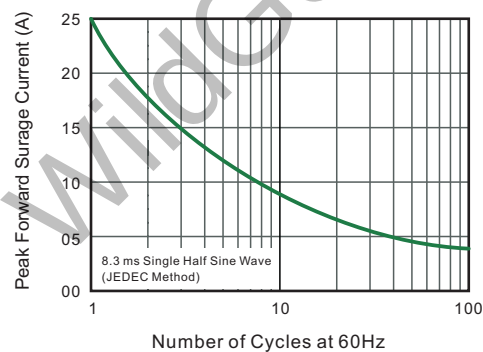


Fig.6- Typical Transient Thermal Impedance

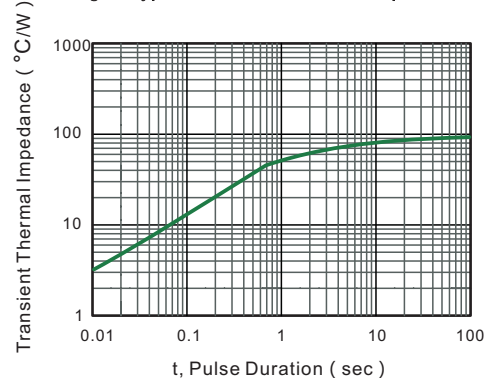


**Package Dimension****SMAF**

Unit: mm

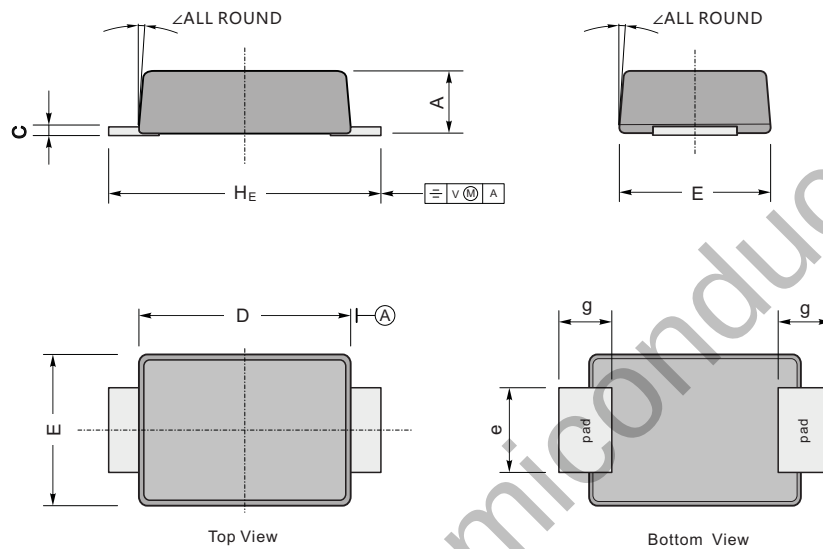

| UNIT |     | A   | C    | D   | E   | e   | g   | H <sub>E</sub> | ∠  |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm   | max | 1.2 | 0.20 | 3.7 | 2.7 | 1.6 | 1.2 | 4.9            | 7° |
|      | min | 0.9 | 0.12 | 3.3 | 2.4 | 1.3 | 0.8 | 4.4            |    |
| mil  | max | 47  | 7.9  | 146 | 106 | 63  | 47  | 193            |    |
|      | min | 35  | 4.7  | 130 | 94  | 51  | 31  | 173            |    |

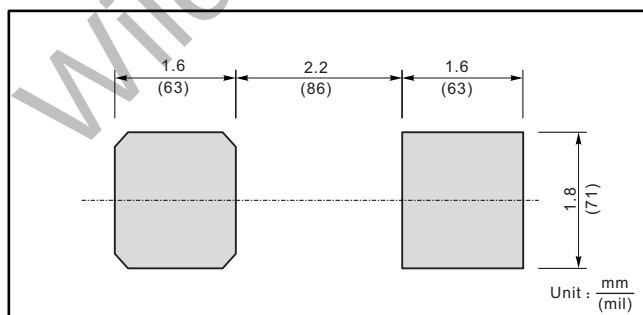**The recommended mounting pad size****Marking**

| Type number | Marking code |
|-------------|--------------|
| SS12F       | SS12         |
| SS14F       | SS14         |
| SS16F       | SS16         |
| SS18F       | SS18         |
| SS110F      | SS110        |
| SS112F      | SS112        |
| SS115F      | SS115        |
| SS120F      | SS120        |