




S2AF-S2MF

Features:

- ☐ For surface mounted applications
- ☐ Low profile package
- ☐ Glass Passivated Chip Junction
- ☐ Easy to pick and place
- ☐ Lead free in comply with EU RoHS 2011/65/EU directives

SMAF



1.Cathode 2. Anode

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	S2AF	S2BF	S2DF	S2GF	S2JF	S2KF	S2MF	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current@ Fig.1	$I_{F(AV)}$	2							A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50							A
Peak Forward Surge Current,1ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	100							A
I^2t Rating for fusing($3ms \leq t \leq 8.3ms$)	I^2t	10.4							A ² S
Maximum Instantaneous Forward Voltage at 2 A	V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_j = 25\text{ }^\circ\text{C}$ $T_j = 125\text{ }^\circ\text{C}$	I_R	5 100							μA
Typical Junction Capacitance (1)	C_j	20							pF
Typical Thermal Resistance (2)	$R_{\theta JA}$ $R_{\theta JC}$ $R_{\theta JL}$	100 20 30							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150							$^\circ\text{C}$

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 0.2"X 0.2" (5 X 5 mm) copper pad areas.

Typical Characteristics

Fig.1 Average Rectified Output Current Derating Curve

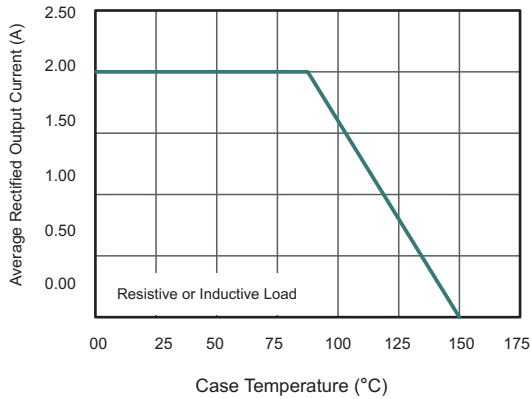


Fig.2 Typical Instantaneous Reverse Characteristics

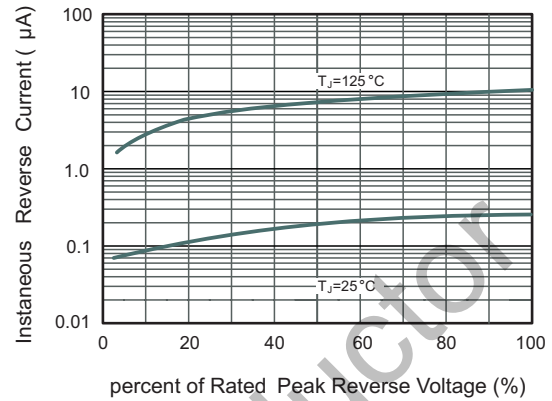


Fig.3 Typical Instantaneous Forward Characteristics

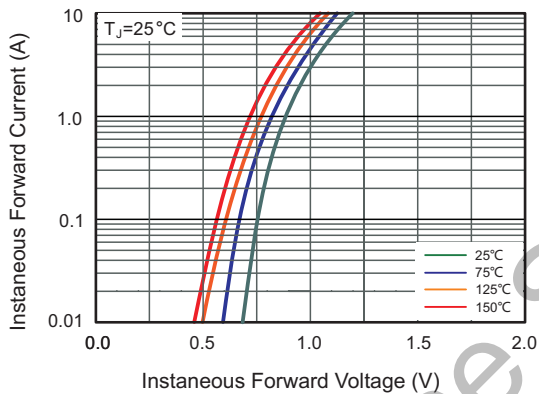


Fig.4 Typical Junction Capacitance



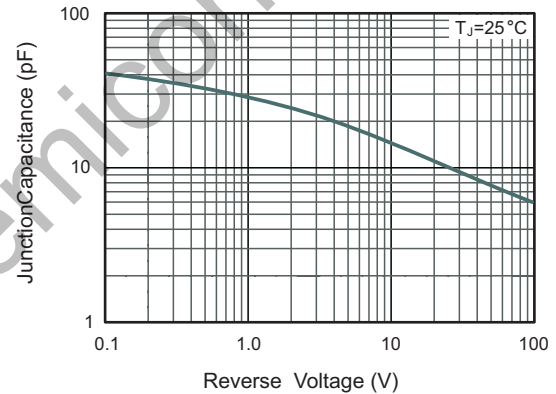


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

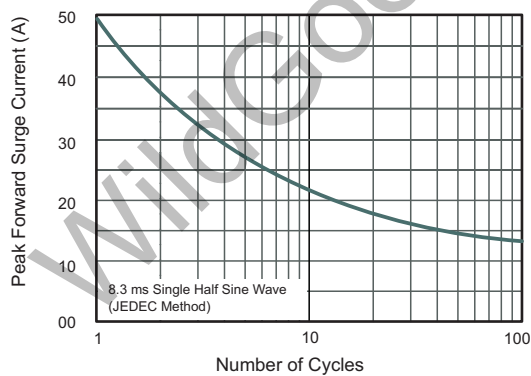


Package Dimension**SMAF**

Unit: mm

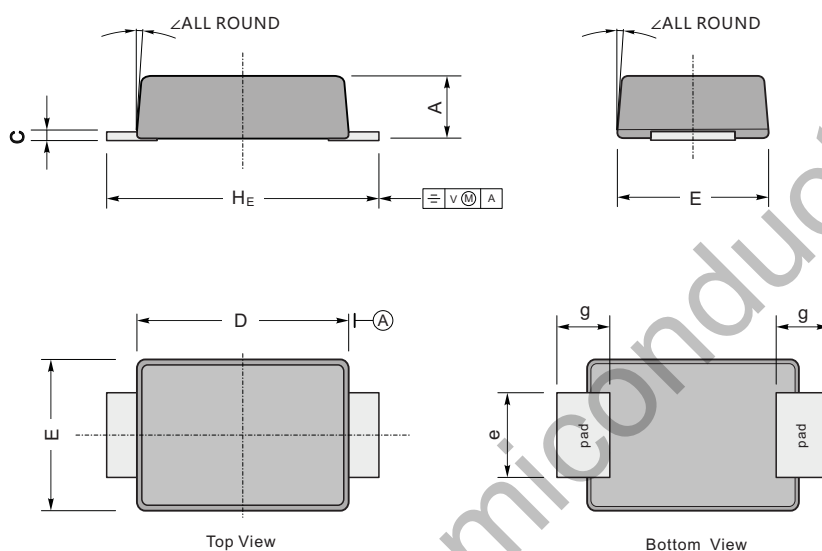

UNIT		A	C	D	E	e	g	H _E	∠
mm	max	1.2	0.20	3.7	2.7	1.6	1.2	4.9	7°
	min	0.9	0.12	3.3	2.4	1.3	0.8	4.4	
mil	max	47	7.9	146	106	63	47	193	
	min	35	4.7	130	94	51	31	173	

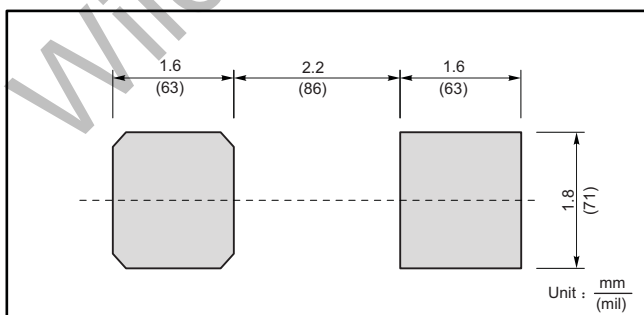The recommended mounting pad size**Marking**

Type number	Marking code
S2AF	S2A
S2BF	S2B
S2DF	S2D
S2GF	S2G
S2JF	S2J
S2KF	S2K
S2MF	S2M