

Features

- 10 μ A Ground Current at no Load
- $\pm 2\%$ Output Accuracy
- 600mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.32V at 600mA V_{OUT} 3.3V
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over Temperature Protection
- SOT23-5 Packages

General Description

This production is group of low -dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 1.2V to 5.5V, low dropout voltage, low power consumption, and miniaturized packaging. Quiescent current of only 10 μ A makes these devices ideal for powering the battery-powered, always-on systems that require very little idle-state power dissipation to a longer service life. There is an option of

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment
- Car Navigation Systems

shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 10nA (typical).

This production is of linear regulators are stable with the ceramic output capacitor over its wide input range from 1.2V to 5.5V and the entire range of output load current (0mA to 600mA).

Ordering Information

AP2112K-3.3TRG1

Output voltage: 1.2=1.2V


1.8=1.8V

3.0=3.0V

3.3=3.3V

3.6=3.6V

PIN CONFIGURATION



Typical Application Circuit

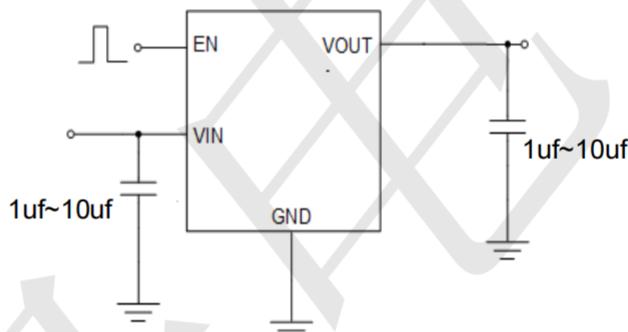


Figure 2: Application circuit of Fixed V_{OUT} LDO with enable function

ABSOLUTE MAXIMUM RATINGS

VIN Pin to GND Pin Voltage	-0.3V to 6.5V
V _{OUT} Pin and EN Pin Voltage	-0.3V to 6V
V _{OUT} Pin to VIN Pin Voltage	-6V to 0.3V
Storage Temperature Range	-60°C~150°C
Lead Temperature (Soldering, 10 sec)	260°C
Junction Temperature	150°C
Operating Ambient Temperature Range T _A	-40°C~85°C
Thermal Resistance Junction to Case, R _{θJC}	SOT23-3 115°C/W SOT23-5 115°C/W DFN-4(1x1) 65°C/W DFN-6(2x2) 30°C/W
Thermal Resistance Junction to Ambient, R _{θJA}	SOT23-3 250°C/W SOT23-5 250°C/W DFN-4(1x1) 195°C/W DFN-6(2x2) 165°C/W

Electrical Characteristics (TA=25°C unless otherwise noted)

(VIN =5V, VEN = 5V TA=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Supply Voltage	VIN			1.2	--	5.5	V
DC Output Voltage Accuracy		ILOAD =0.1mA		-2		2	%
Dropout Voltage (ILOAD =600mA) (Note 3)	VDROP_3V	VOUT ≥ 3V		0.32			V
	VDROP_2.8V	VOUT = 2.8V		0.36			
	VDROP_2.5V	VOUT = 2.5V		0.36			
	VDROP_1.8V	VOUT = 1.8V		0.57			
	VDROP_1.5V	VOUT = 1.5V		0.71			
	V	V = 1.2V		0.8			
Ground Current	IQ	ILOAD = 0mA			10		µA
Shutdown Ground Current	ISD	VEN = 0V,		0.01	0.5		µA
VOUT Shutdown Leakage Current	ILEAK	VOUT = 0V		0.01	0.5		
Enable Threshold Voltage	VIH	EN Rising			2		V
	UIL	EN Falling		0.6			
EN Input Current	IEN	VEN = 5V			10	100	nA
Line Regulation	ΔLINE	ILOAD =30mA, 1.5V ≤ VIN ≤ 5.5V or (VOUT + 0.2V) ≤ VIN ≤ 5.5V			0.2		%
Load Regulation	ΔLOAD	10mA ≤ ILOAD ≤ 0.3A			0.2		%
Output Current Limit	ILIM	VOUT =0		601	1100		mA
Power Supply Rejection Ratio (ILOAD =5mA)	PSRR	VOUT =1.2V, VIN = 2V	f = 100Hz	--	80	--	dB
			f = 1kHz	--	75	--	
Output Voltage Noise (BW = 10Hz to 100kHz, COUT =1µF,)		VIN = 3.5V ILOAD =0.1A	VOUT =0.9V	--	40	--	µVRMS
			VOUT =2.8V	--	50	--	
Thermal Shutdown Temperature	TSD	ILOAD =10mA		--	155	--	°C
Thermal Shutdown Hysteresis	ΔTSD			--	15	--	°C
Discharge Resistance		EN = 0V , VOUT = 0.1V		--	100	--	Ω

Note 1. Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

Note 2. θ_{JA} is measured at $T_A = 25^\circ\text{C}$ on a TECH PUBLICboard.

Note 3. $V_{\text{DROP}} = V_{\text{IN}} - V_{\text{OUT}}$ when the V_{OUT} is 98% of its target value.

Typical Characteristics

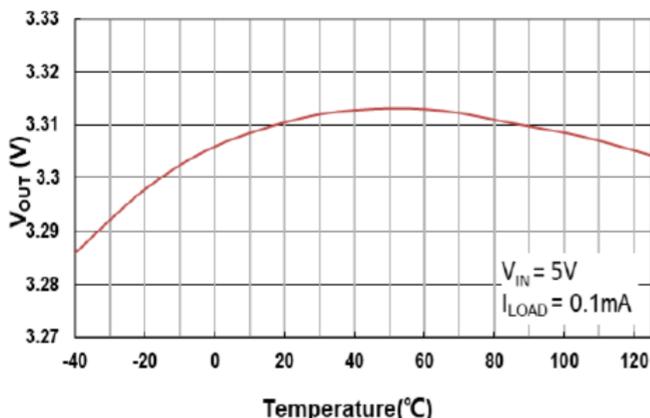


Fig. 5 Output Voltage vs. Temperature

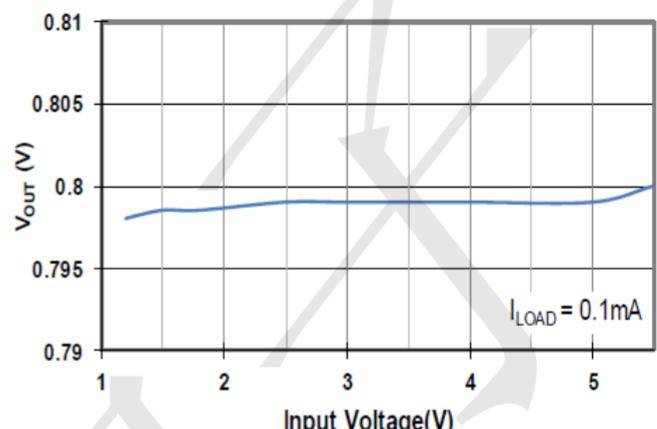


Fig. 6 Output Voltage vs. Input Voltage

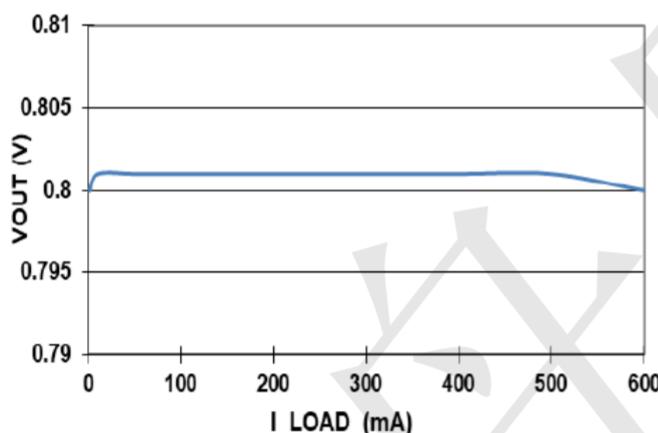


Fig. 7 Output Voltage vs. Load Current

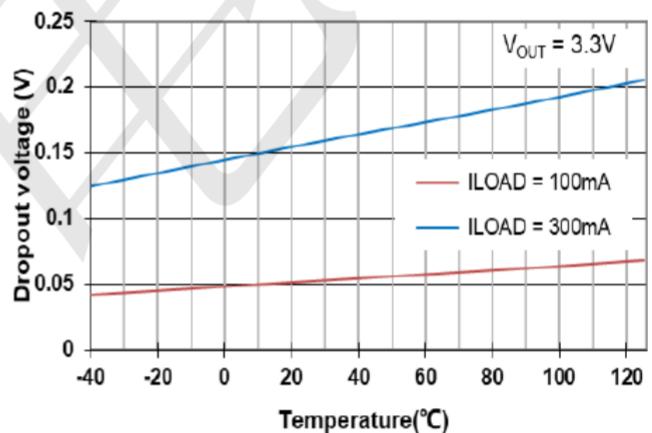


Fig. 8 Dropout Voltage vs. Temperature

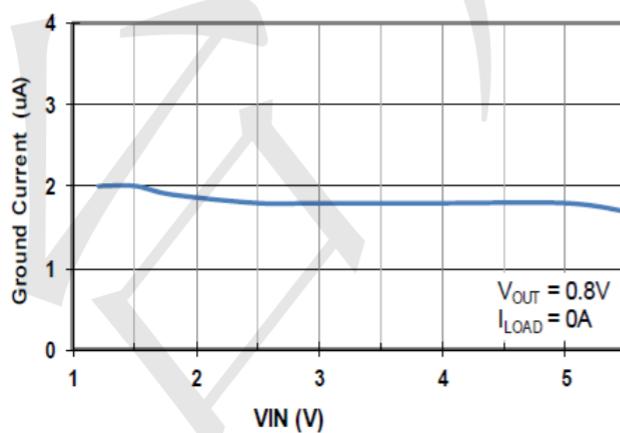


Fig. 9 Ground Current vs. Input Voltage






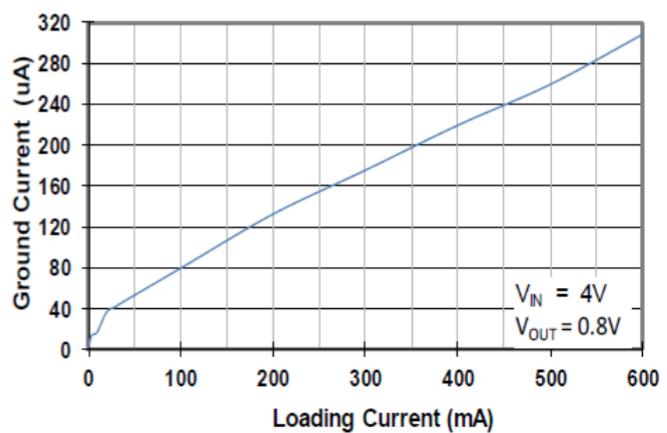



Fig. 10 Ground Current vs. Loading Current

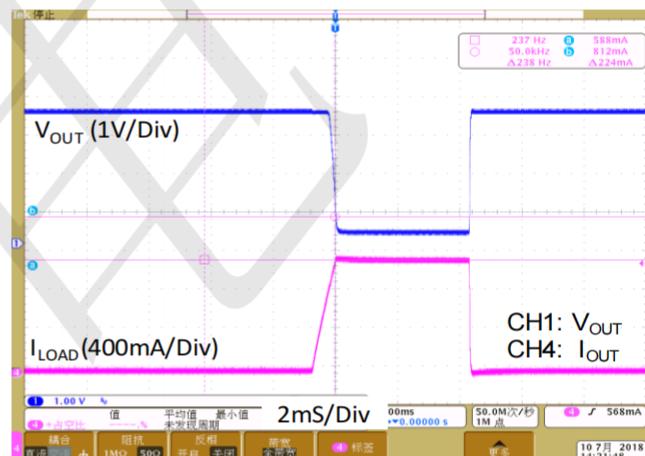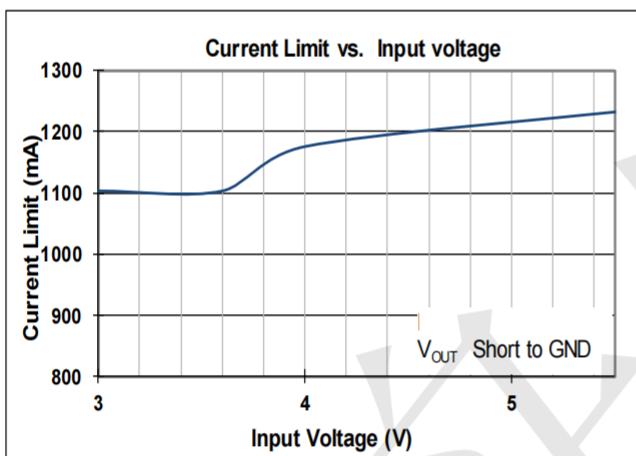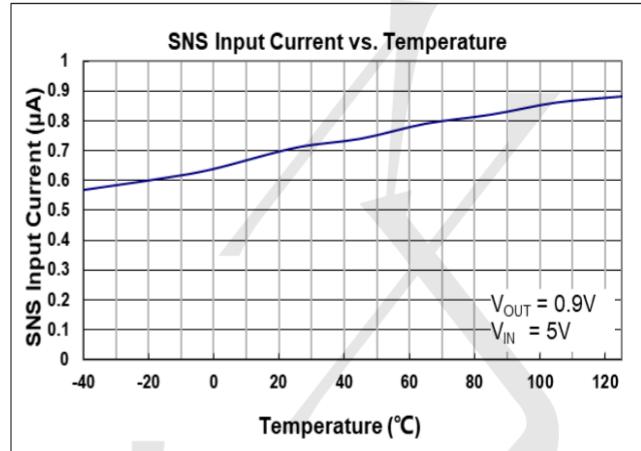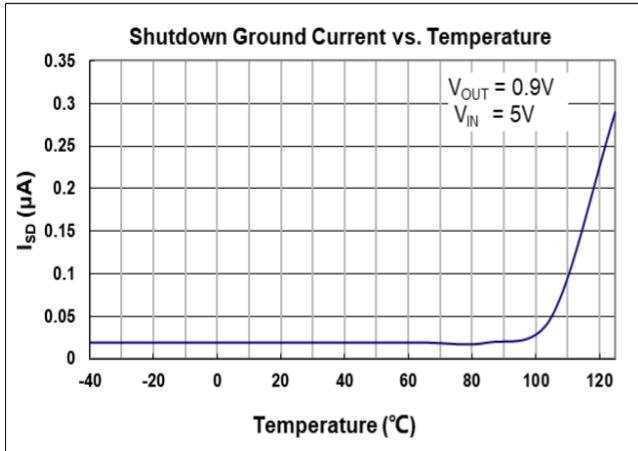

Load Transient Response I

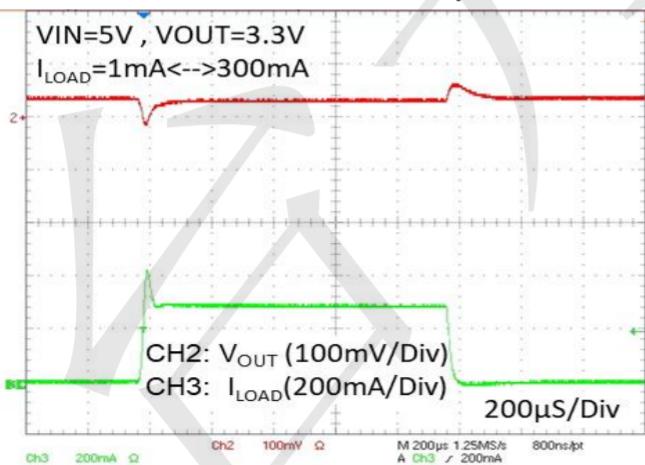

Load Transient Response II

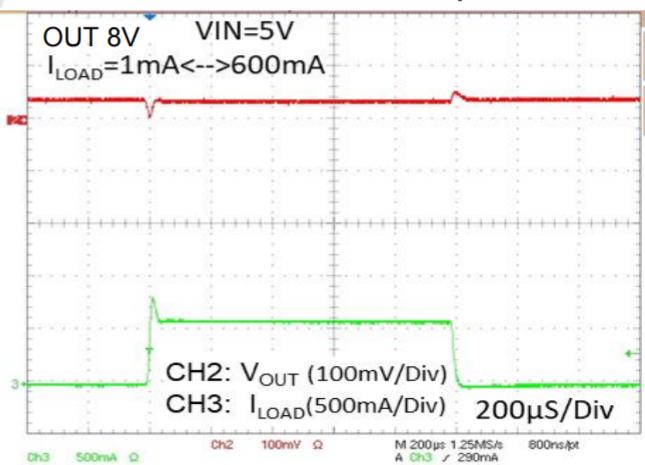

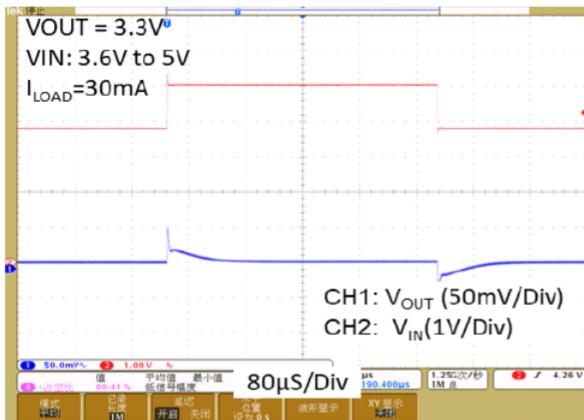


Fig. 17 Line Transient Response


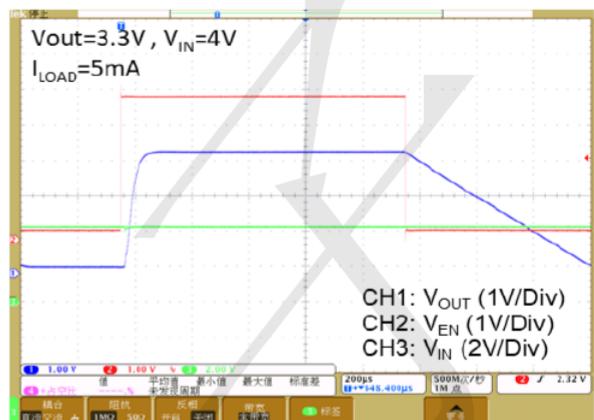



Fig. 18 V_{OUT} Turn On/Off by EN

BLOCK DIAGRAM

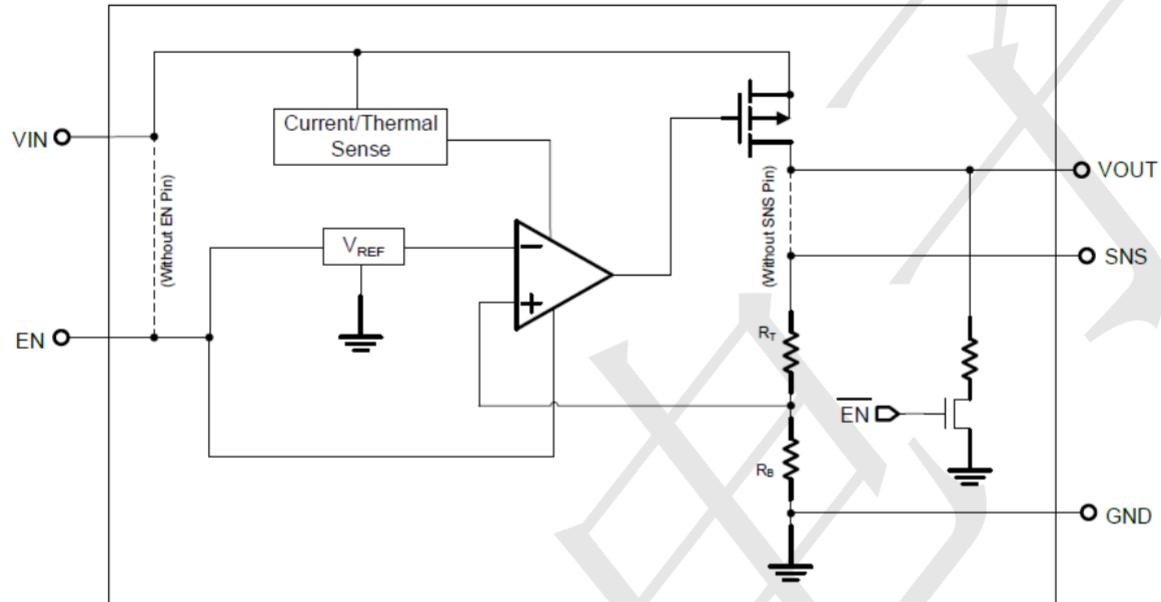

Package information

SOT23-5

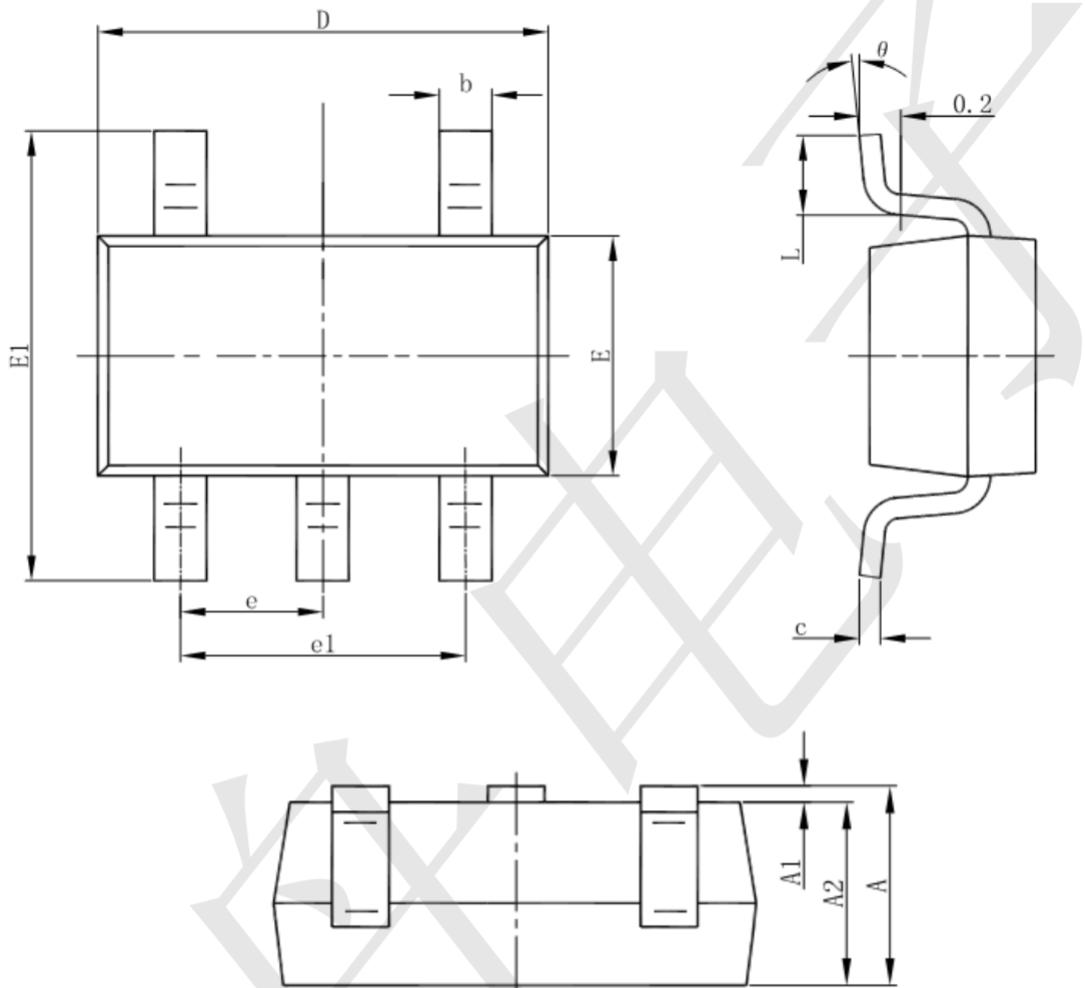

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°