

General Description

The Devices is a low-dropout (LDO) voltage regulator with enable function that operates from a 1.2V to 5.5V supply. It provides up to 300mA of output current in miniaturized packaging.

The feature of 2 μ A low quiescent current and 0.5 μ A shutdown current are ideal for the battery application with long service life. The other features include current limit function, over temperature protection and output discharge function.

Features

- 2 μ A Ground Current at no Load
- $\pm 2\%$ Output Accuracy
- 300mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.18V at 300mA ($V_{OUT}=3.3V$)
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SOT23-5 Package

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment

Ordering Information


LP5907MFX-1.8

Output voltage: 1.2=1.2V
1.5=1.5V
1.8=1.8V
3.0=3.0V
3.3=3.3V


MF:SOT23-5 Package

LP5907MFX-3.3 Marking: LLVB
LP5907MFX-1.8 Marking: LLUB

BLOCK DIAGRAM

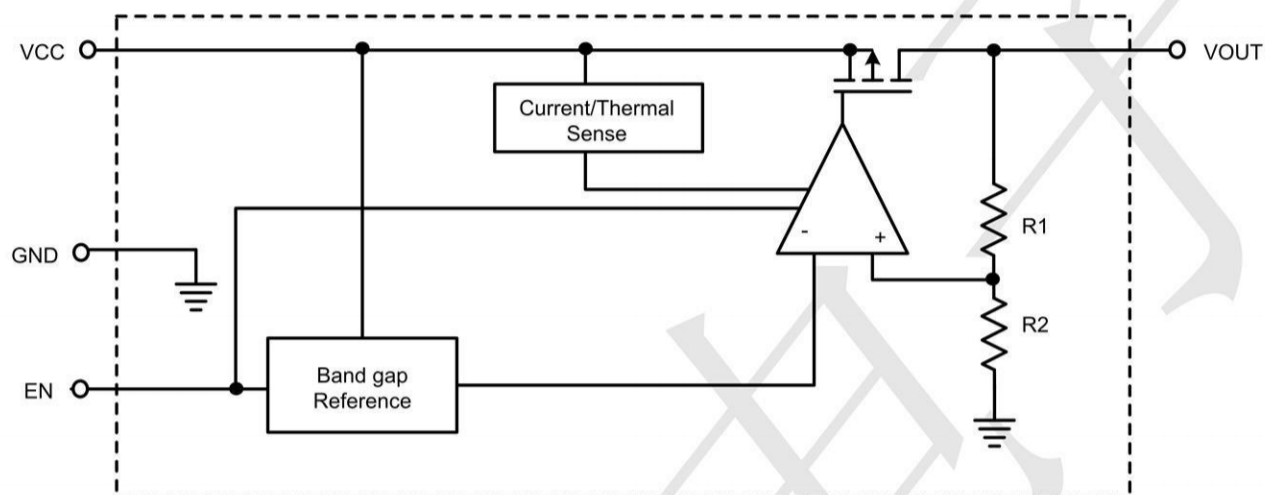

PIN CONFIGURATION



Pin No	Pin Name	Pin Function
1	VIN	Input of Supply Voltage.
2	GND	Ground
3	EN	Enable Control Input.
4	NC	No Internal Connection.
5	VOUT	Output of the Regulator

Absolute Maximum Rating (T_A=25°C unless otherwise noted)

- VIN, VOUT, EN to GND ----- -0.3V to 6.5V
- VOUT to VIN ----- -6.5V to 0.3V
- Power Dissipation, P_D @ T_A = 25°C
SOT-23-5 ----- 0.43W
- Package Thermal Resistance (Note 2)
SOT-23-5, θ_{JA} ----- 230.6°C/W
SOT-23-5, θ_{JC} ----- 21.8°C/W
- Lead Temperature (Soldering, 10 sec.) ----- 260°C
- Junction Temperature ----- 150°C
- Storage Temperature Range ----- -65°C to 150°C
- ESD Susceptibility (Note 3)
HBM (Human Body Model) ----- 2kV


Electrical Characteristics (T = 25°C unless otherwise noted)

(V_{OUT} + 1 < V_{IN} < 5.5V, T_A = 25°C, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Fixed Output Voltage Range	V _{OUT}		0.8	--	3.45	V
DC Output Accuracy		I _{LOAD} = 1mA	-2	--	2	%
Dropout Voltage (I _{LOAD} = 300mA) (Note 5)	V _{DROP}	0.8V ≤ V _{OUT} < 1.05V	--	0.7	0.97	V
		1.05V ≤ V _{OUT} < 1.2V	--	0.5	0.92	
		1.2V ≤ V _{OUT} < 1.5V	--	0.4	0.57	
		1.5V ≤ V _{OUT} < 1.8V	--	0.3	0.47	
		1.8V ≤ V _{OUT} < 2.1V	--	0.24	0.33	
		2.1V ≤ V _{OUT} < 2.5V	--	0.21	0.3	
		2.5V ≤ V _{OUT} < 2.8V	--	0.18	0.25	
		2.8V ≤ V _{OUT} < 3V	--	0.16	0.23	
		3V ≤ V _{OUT}	--	0.15	0.2	
Dropout Voltage (I _{LOAD} = 200mA) (Note 6)	V _{DROP}	1.8V ≤ V _{OUT} < 2.1V	--	0.16	0.2	V
V _{CC} Consumption Current	I _Q	I _{LOAD} = 0mA, V _{OUT} ≤ 5.5V V _{IN} ≥ V _{OUT} + V _{DROP}	--	2	4	μA







Parameter		Symbol	Test Conditions		Min	Typ	Max	Unit
Shutdown GND Current (Note 7)			V _{EN} = 0V		--	0.1	0.5	μA
Shutdown Leakage Current (Note 7)			V _{EN} = 0V, V _{OUT} = 0V		--	0.1	0.5	μA
EN Input Current		I _{EN}	V _{EN} = 5.5V		--	--	0.1	μA
Line Regulation	ΔLINE	I _{LOAD} = 1mA	1.2V ≤ V _{IN} < 1.5V	--	0.3	0.6	%	
			1.5V ≤ V _{IN} < 1.8V	--	0.15	0.3		
			1.8V ≤ V _{IN} ≤ 5.5V	--	0.13	0.35		
Load Regulation		ΔLOAD	1mA < I _{LOAD} < 300mA		--	0.5	1	%
Power Supply Rejection Ratio		PSRR	V _{IN} = 3V, I _{LOAD} = 50mA, C _{OUT} = 1μF, V _{OUT} = 2.5V, f = 1kHz		--	75	--	dB
Output Voltage Noise			C _{OUT} = 1μF, I _{LOAD} = 150mA, BW = 10Hz to 100kHz, V _{IN} = V _{OUT} + 1V	V _{OUT} = 0.8V	--	38	--	μV _{RMS}
				V _{OUT} = 1.2V	--	46	--	
				V _{OUT} = 1.8V	--	48	--	
				V _{OUT} = 3.3V	--	51	--	
Output Current Limit		I _{LIM}	V _{OUT} = 90% of V _{OUT(NOM)}		350	600	--	mA
Enable Threshold Voltage	H-Level	V _{ENH}	V _{IN} = 5V		0.5	0.7	0.9	V
	L-Level	V _{ENL}	V _{IN} = 5V		0.4	0.65	0.85	
Thermal Shutdown Temperature		T _{SD}	I _{LOAD} = 30mA, V _{IN} ≥ 1.5V		--	150	--	°C
Thermal Shutdown Hysteresis		ΔT _{SD}			--	20	--	°C
Discharge Resistance			EN = 0V, V _{OUT} = 0.1V		--	80	--	Ω

TYPICAL APPLICATION

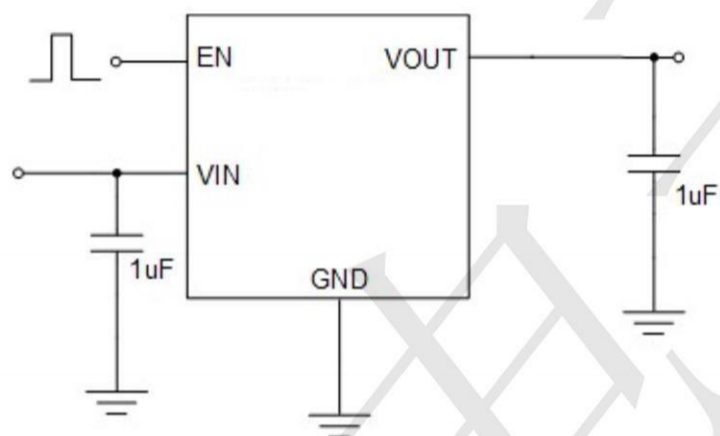


Application circuit of Fixed V_{OUT} LDO with enable function


Typical Operating Characteristics

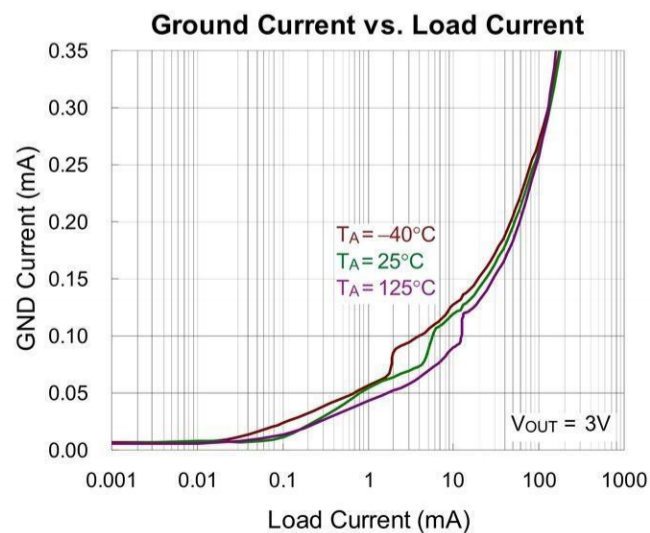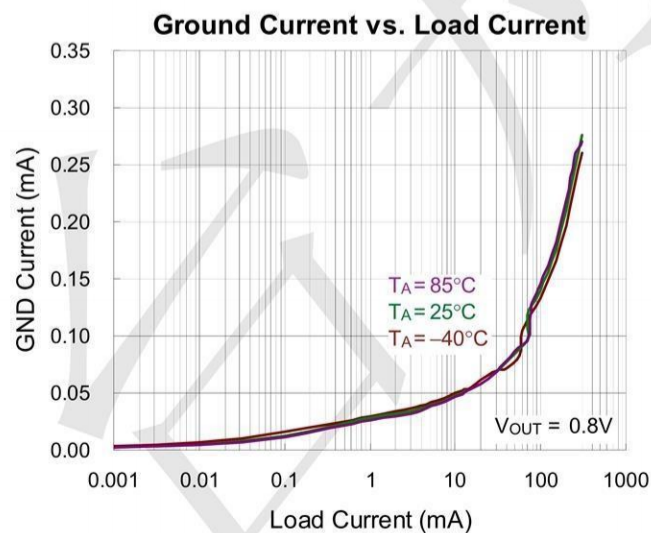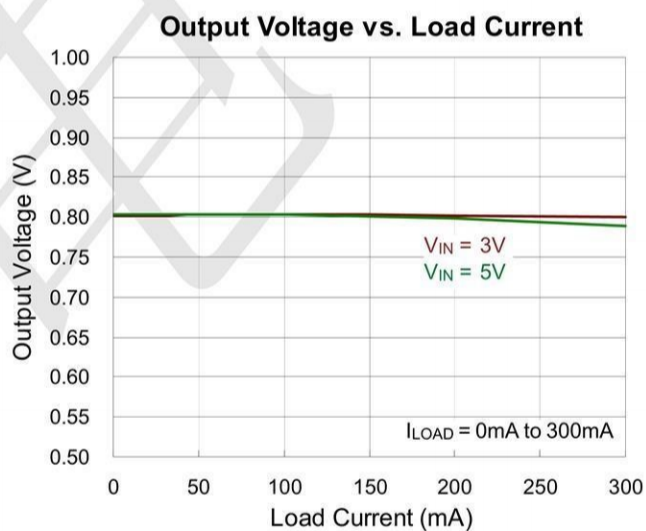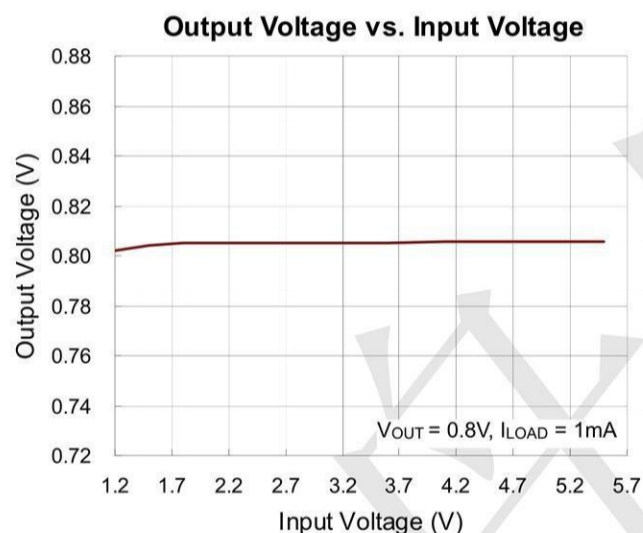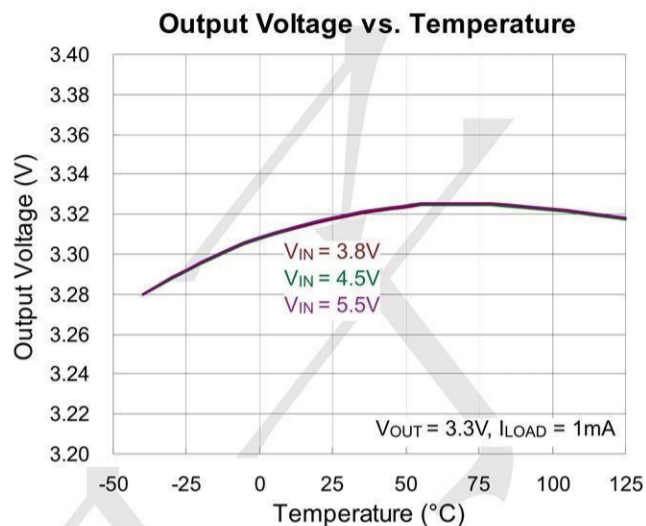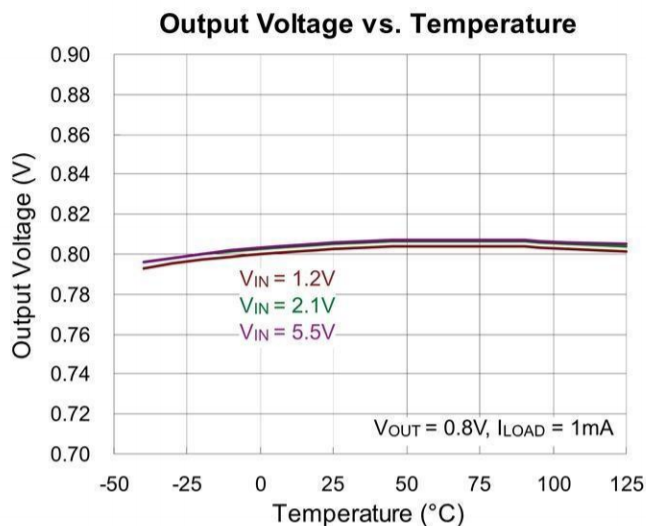


Shutdown Current vs. Input Voltage

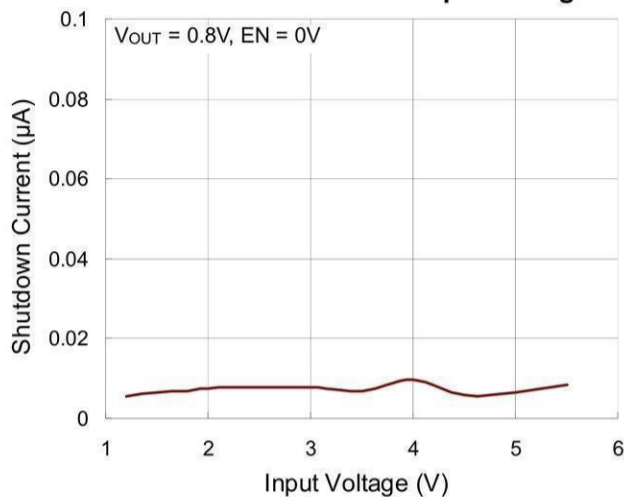


Shutdown Leakage Current vs. Temperature

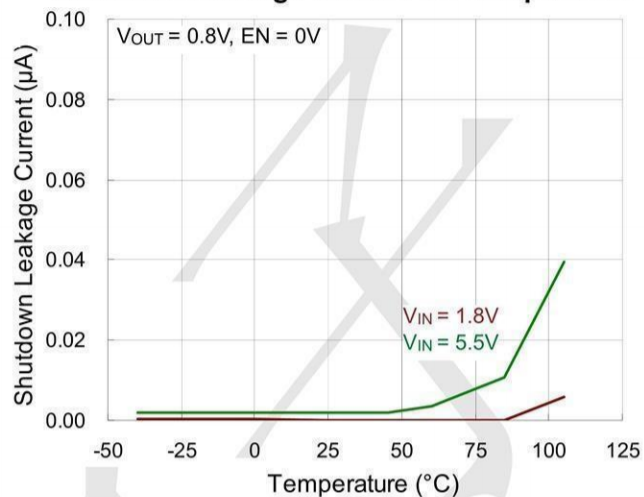


EN Threshold vs. Input Voltage

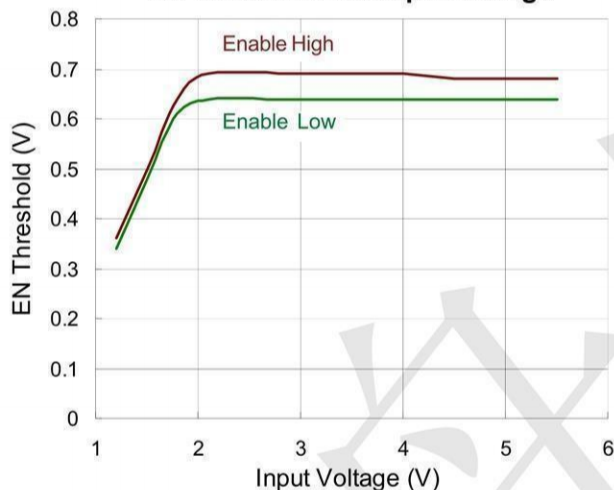


EN Threshold vs. Temperature

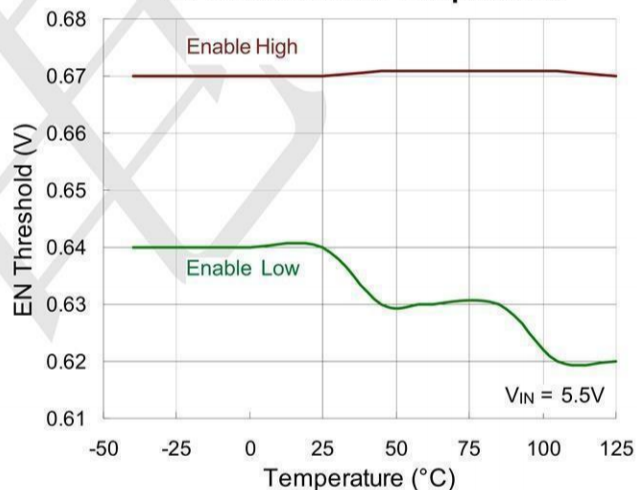


Dropout Voltage vs. Temperature

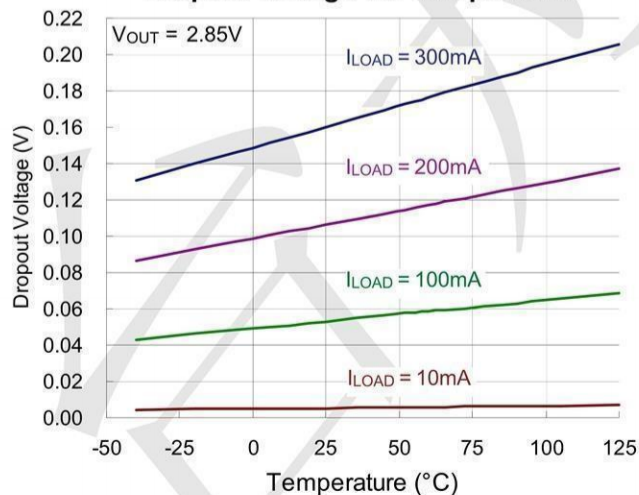


Current Limit vs. Temperature

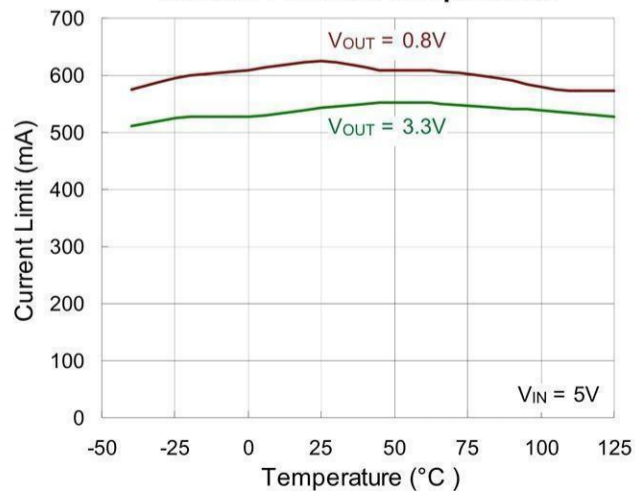


Fold-Back Current Limit vs. Temperature

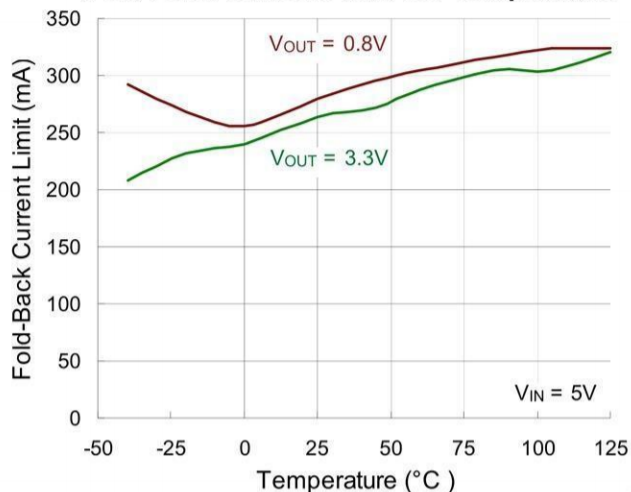


SNS Input Current vs. Temperature

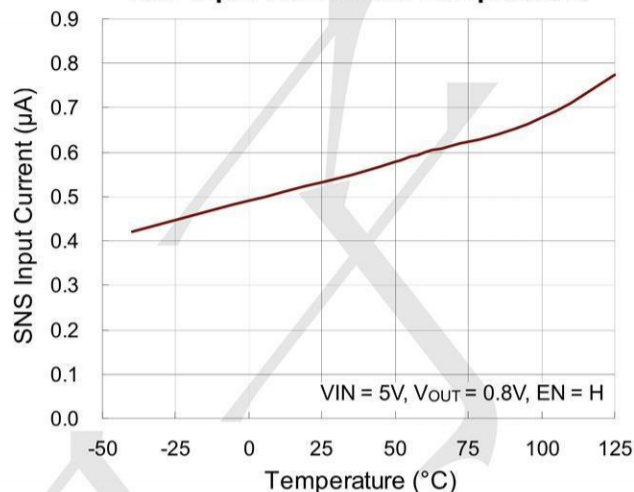


Power On from EN

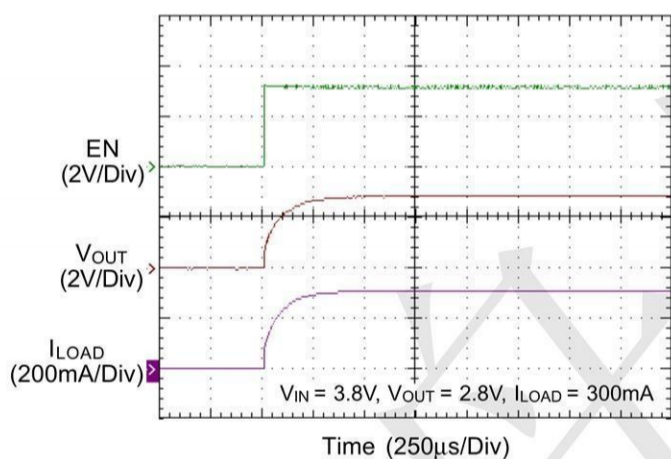


Power Off from EN

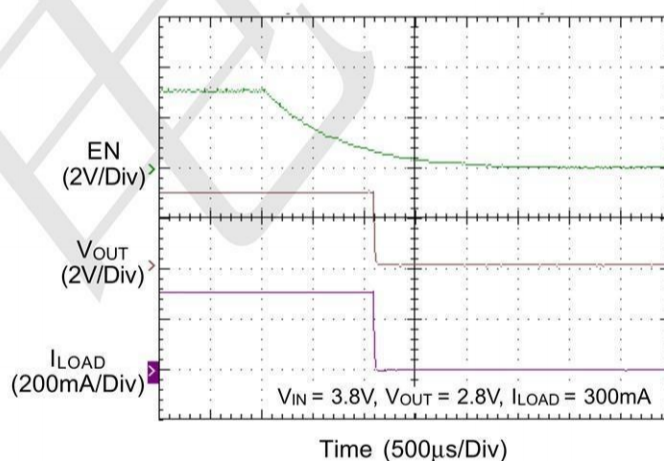


Line Transient

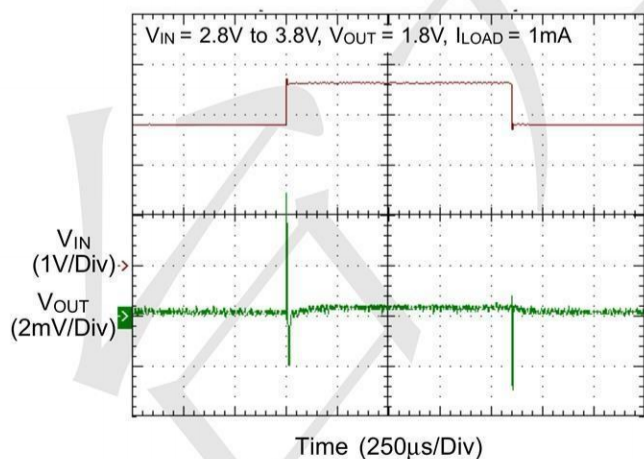


Load Transient

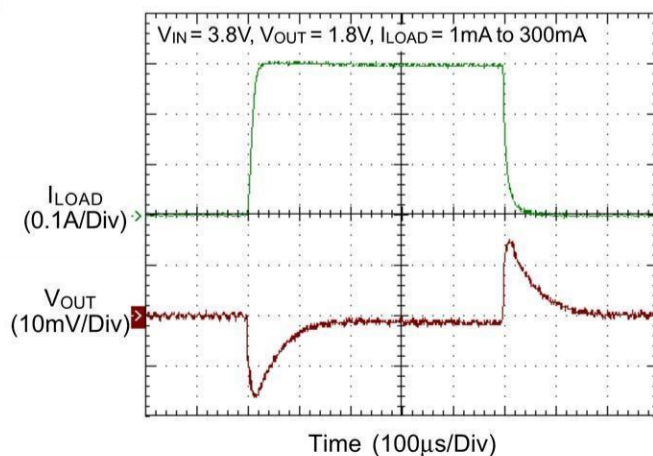


Output Current Limit Protection

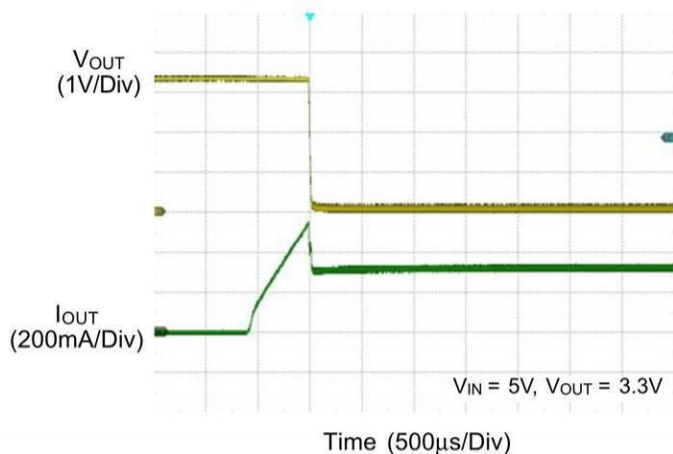


PSRR vs. Frequency

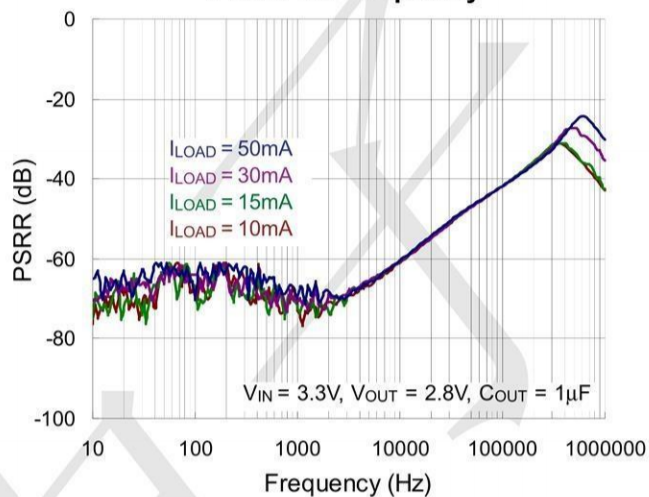

PSRR vs. Frequency

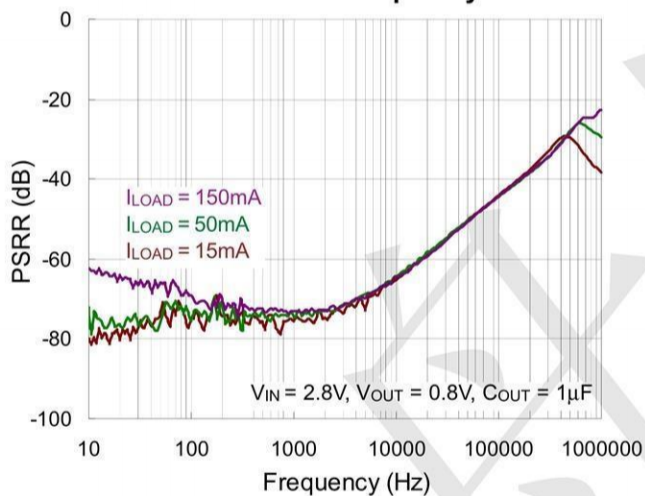


Output Noise vs. Frequency

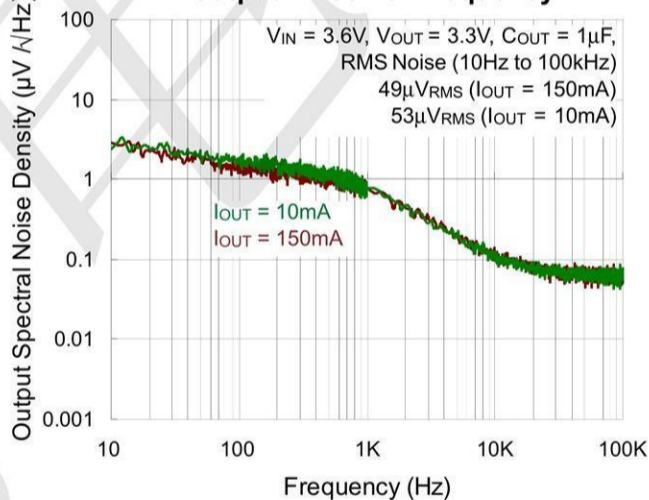

Package informantion

3-pin SOT23-5 Outline Dimensions

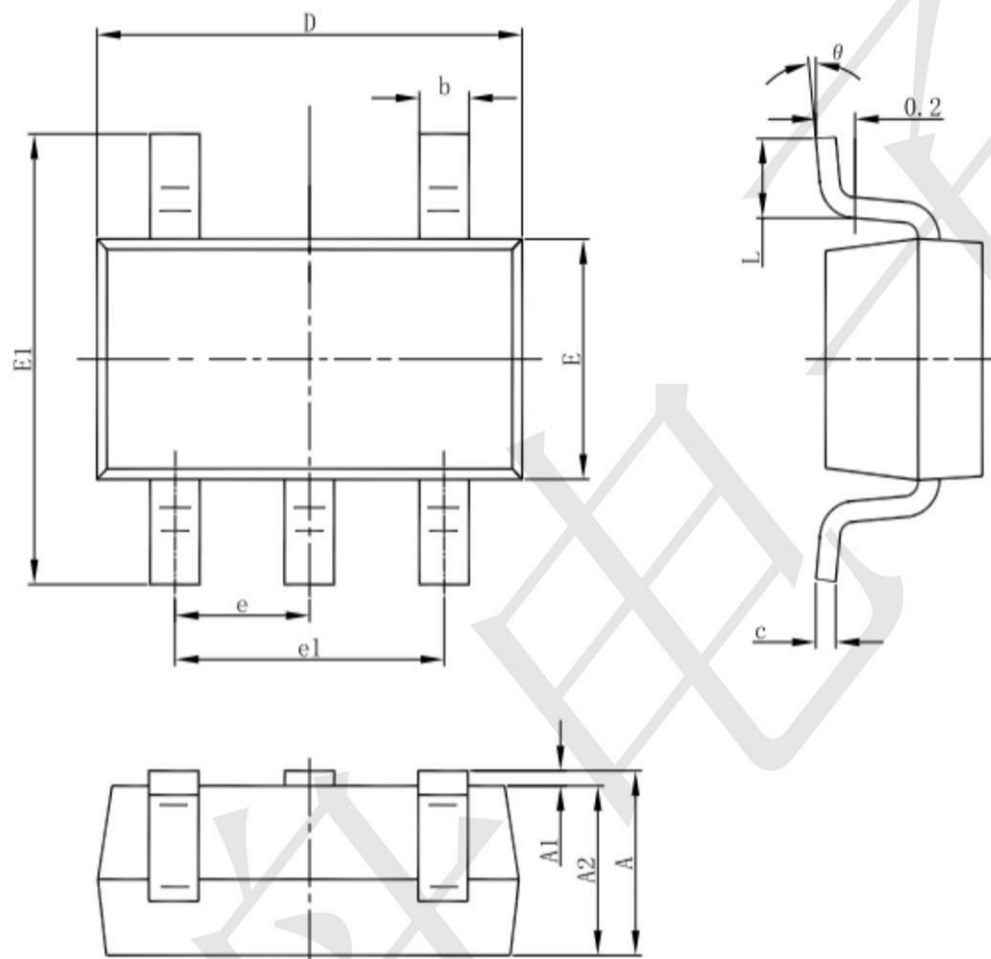

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°