




FRED Modules

V_{RRM} 600V

I_{FAV} 300 A

Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

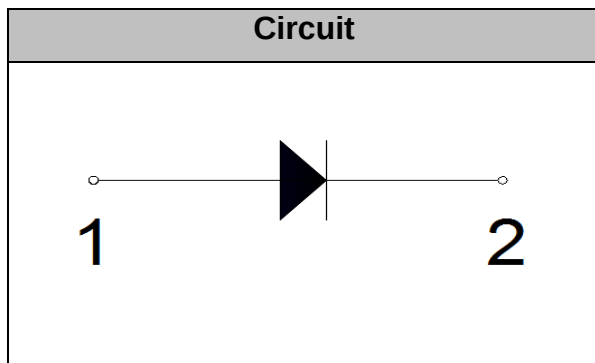

Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

Maximum Ratings

Symbol	Conditions	Values	Units
V _R		600	V
V _{RRM}		600	V
I _{F(AV)}	T _C =110°C,	300	A
I _{F(RMS)}	T _C =110°C,	420	A
I _{FSM}	1/2 Cycle , 50Hz, Sine	3500	A
	1/2 Cycle , 60Hz, Sine	4000	A
I ² t	T _J =45°C, t=10ms, 50Hz, Sine	61250	A ² s
	T _J =45°C, t=8.3ms, 60Hz, Sine		A ² s
P _D		1136	W
Visol	a.c.50HZ;r.m.s.;1min	3000	V
T _J		-40 to +150	°C
T _{STG}		-40 to +125	°C
Torque	Module-to-Sink Recommended (M6)	3~4.7	N·m
Torque	Module Electrodes Recommended (M6)	3~4.7	N·m
Weight		92	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Per Module	0.1	°C/W



Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=600V$	--	--	0.5	mA
	$V_R=600V, T_J=125^{\circ}C$	--	--	5	mA
V_F	$I_F=300A$	--	1.15		V
	$I_F=300A, T_J=125^{\circ}C$	--	0.9		V
trr	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	55	--	ns
trr	$V_R=300V, I_F=300A, di_F/dt=-200A/\mu s, T_J=25^{\circ}C$	--	145	--	ns
I_{RRM}		--	17	--	A
trr	$V_R=300V, I_F=300A, di_F/dt=-200A/\mu s, T_J=125^{\circ}C$	--	240	--	ns
I_{RRM}		--	30	--	A

Performance Curves

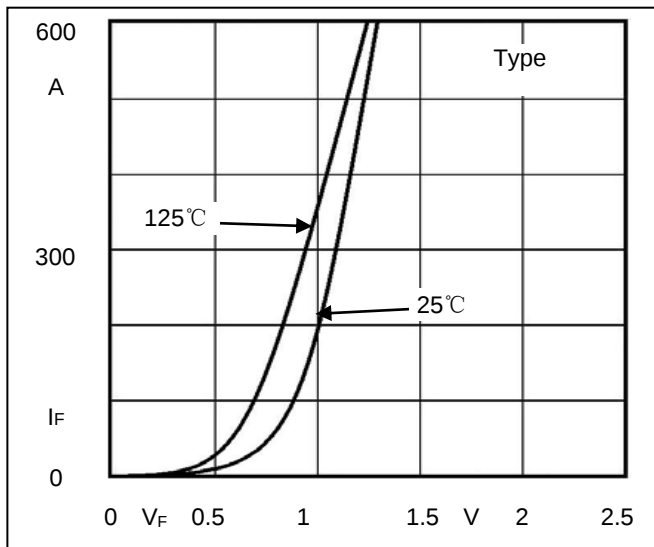


Fig1. Forward Voltage Drop vs Forward Current

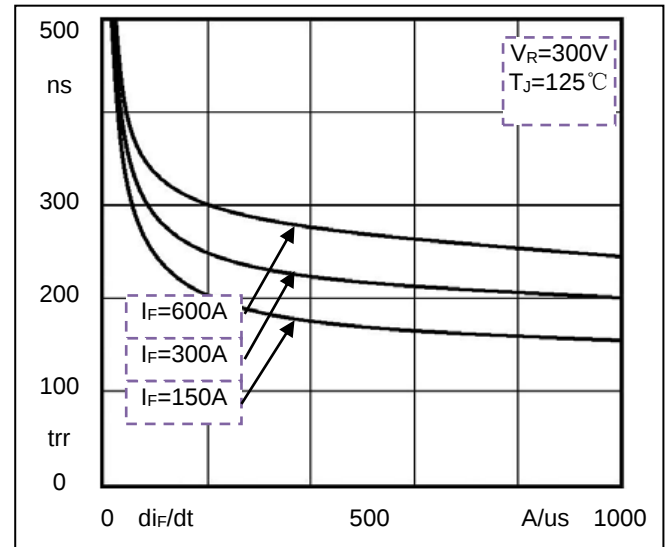


Fig2. Reverse Recovery Time vs di_F/dt

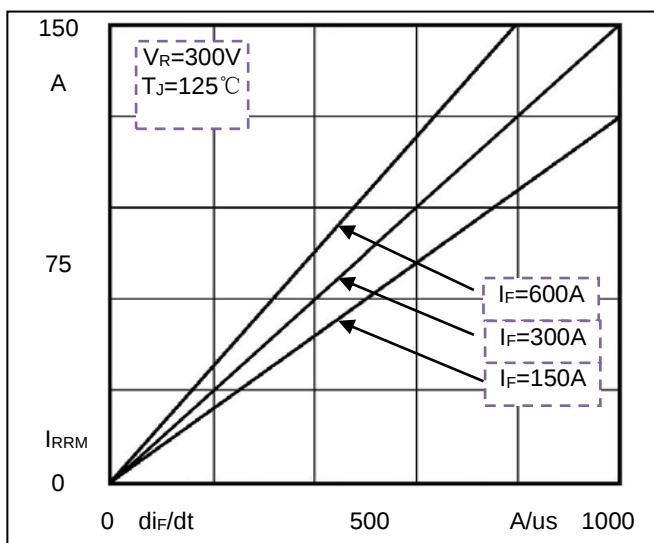


Fig3. Reverse Recovery Current vs di_F/dt


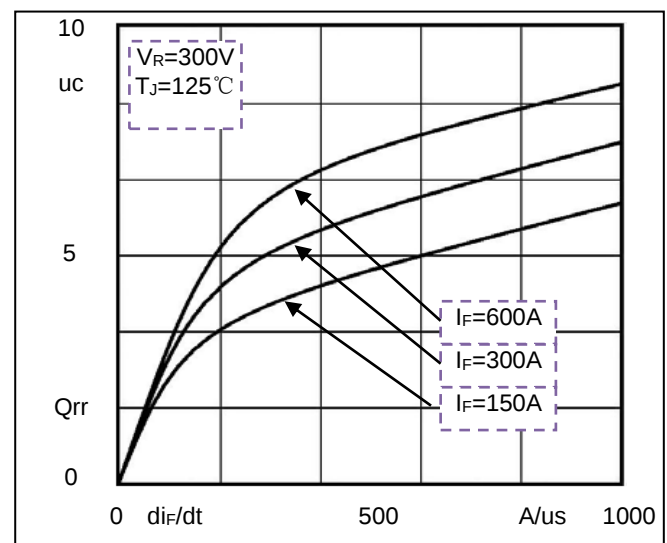


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F6

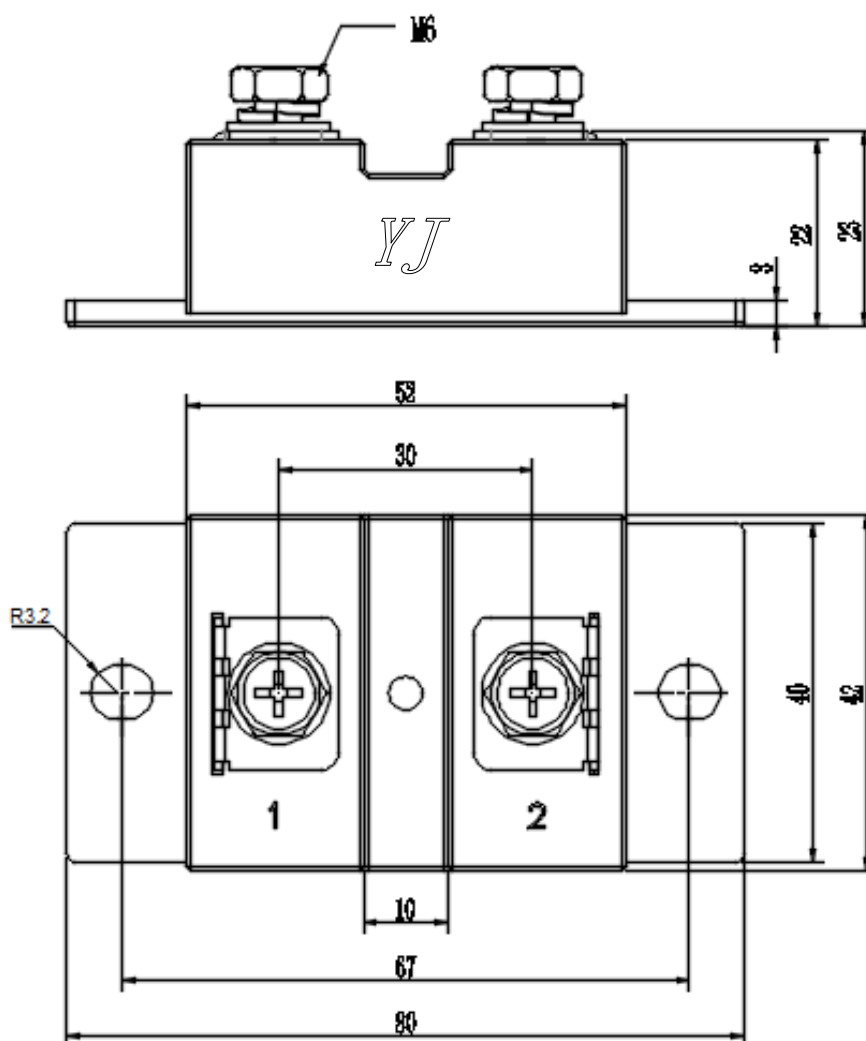

Dimensions in mm