


### SiC Schottky Barrier Rectifier

**Reverse Voltage - 650V**

**Forward Current - 15A**

#### Features

- ◆ Reverse withstand voltage 650V
- ◆ Zero reverse recovery current
- ◆ High working frequency
- ◆ Switch characteristics are not affected by temperature
- ◆ Fast switching speed
- ◆ Positive temperature coefficient of positive pressure drop

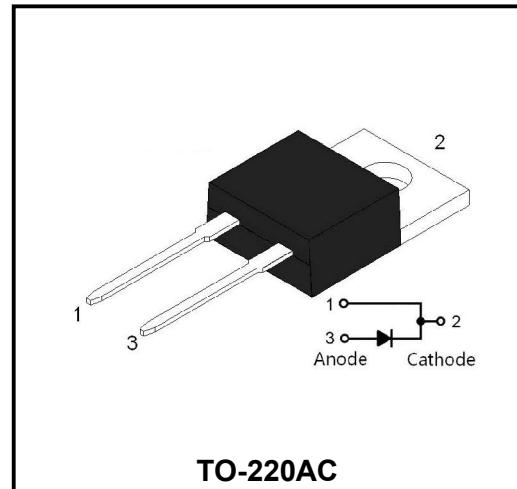

#### Advantages

- ◆ Very low switching loss
- ◆ Higher efficiency
- ◆ Low dependence of the system on the heat sink
- ◆ No thermal collapse in parallel devices

#### Application

- ◆ Switching mode power supply, AC/DC converter
- ◆ Power factor correction
- ◆ Motor drive
- ◆ PV inverter and wind turbine

#### Absolute Maximum Rating (Ta=25°C)

Parameter	Symbol	Test conditions	Value	Unit
Peak repetitive reverse voltage	V <sub>RRM</sub>		650	V
Working Peak Reverse voltage	V <sub>RWM</sub>		650	V
DC Blocking Voltage	V <sub>DC</sub>		650	V
Average rectified output current	I <sub>F(AV)</sub>	T <sub>a</sub> =25°C T <sub>a</sub> =125°C T <sub>a</sub> =150°C	38 18 15	A
Forward repetitive peak current	I <sub>FRM</sub>	T <sub>c</sub> =25°C, tp=10ms, Half Sine Wave T <sub>c</sub> =110°C, tp=10ms, Half Sine Wave	65 45	A
Forward surge current	I <sub>FSM</sub>	T <sub>c</sub> =25°C, tp=10ms, Half Sine Wave T <sub>c</sub> =110°C, tp=10ms, Half Sine Wave	155 145	A
Power dissipation	P <sub>tot</sub>	T <sub>a</sub> =25°C T <sub>a</sub> =110°C	120 55	W
Junction temperature	T <sub>j</sub>		-55 ~ +175	°C
Storage temperature	T <sub>stg</sub>		-55 ~ +175	°C
Mounting Torque		M3 Screw 6-32 Screw	1 8.8	Nm lbf-in

**Thermal characteristics**

Parameter	Symbol	Vaule	Unit
Thermal Resistance - Junction to Case	$R_{\theta JC}$	1	°C/ W

**Electrical Characteristics (Ta=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Forward voltage	$V_F$	$I_F = 20 A, T_j=25^\circ C$ $I_F = 20 A, T_j=175^\circ C$		1.5 2.0	1.8 2.4	V
Reverse current	$I_R$	$V_R = 650V, T_j=25^\circ C$ $V_R = 650V, T_j=175^\circ C$			60 220	μA
Total capacitive charge	$Q_C$	$V_R = 400V, I_F = 10A$ $di/dt=500A/\mu s, T_j=25^\circ C$		45		nC
Total capacitance	C	$V_R = 0V, T_j=25^\circ C, f=1MHz$ $V_R = 200V, T_j=25^\circ C, f=1MHz$ $V_R = 400V, T_j=25^\circ C, f=1MHz$		877 85 65		pF

### Typical Characteristics

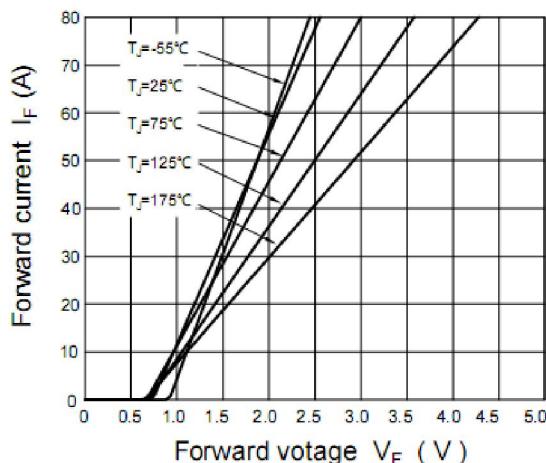


Figure 1. Forward Characteristics

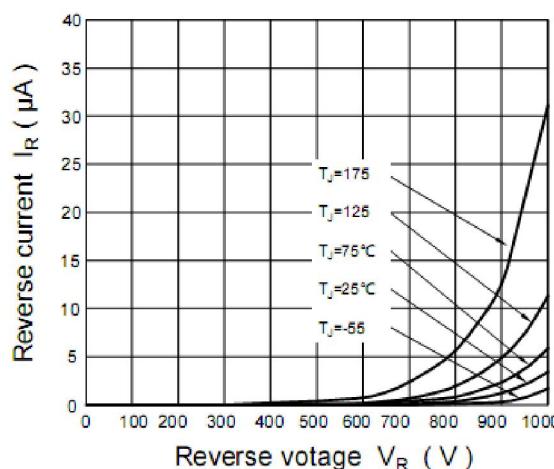


Figure 2. Reverse Characteristics

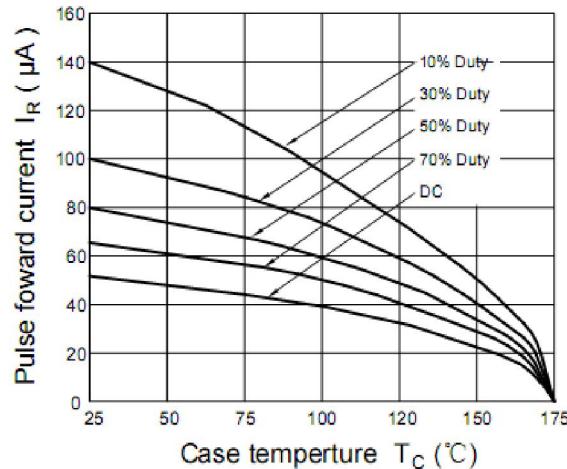


Figure 3. Current Derating

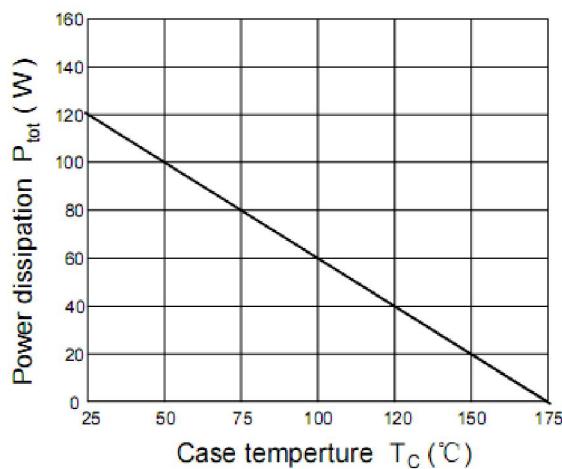


Figure 4. Power Derating

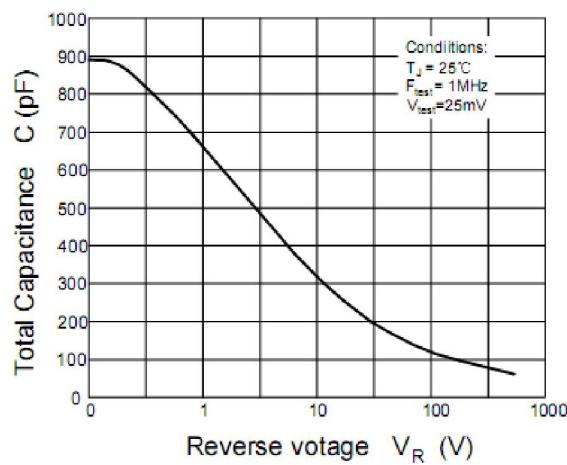


Figure 5. Capacitance vs reverse voltage

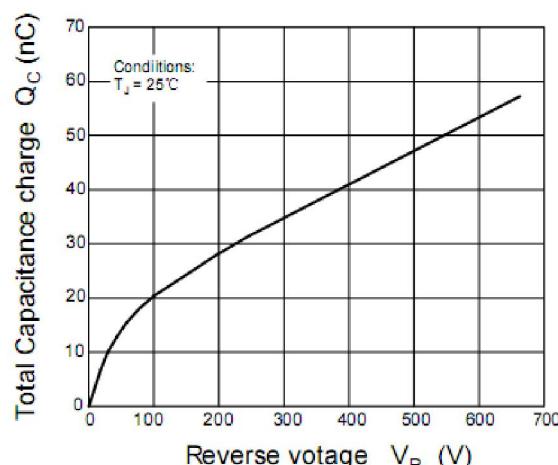


Figure 6. Total Capacitance charge vs. reverse voltage

**Package Dimensions**

**TO-220AC**

<b>Symbol</b>	<b>Millimeter</b>		<b>Inches</b>	
	<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>
A	4.34	4.67	0.171	0.184
A1	2.52	2.82	0.099	0.111
b	0.71	0.91	0.028	0.036
b1	1.17	1.37	0.046	0.054
c	0.30	0.50	0.012	0.020
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
E1	12.00	12.50	0.472	0.492
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
F	2.60	2.80	0.102	0.110
L	13.20	13.80	0.520	0.543
L1	3.80	4.20	0.150	0.165
Φ	3.60	3.96	0.142	0.156