



ZHEJIANG UNI-NE Technology CO., LTD

浙江宇力微新能源科技有限公司



U3115E Data Sheet

V 1.2

版权归浙江宇力微新能源科技有限公司

Half-bridge of power MOSFET/IGBT Drive

General Description

The U3115E Fully operated to +350V is high voltage, high speed power MOSFET and IGBT driver with dependent high and low side referenced output channels.

The logic input is compatible with standard CMOS or LSTTL output, down to 3.3V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 350 volts.

Product Summary

V _{OFFSET}	350V
I _{O+/-}	1.0A / 1.2A
ton/off (typ.)	450 & 150ns
Deadtime (typ.)	300 ns
Work Tem	-40 ~150 °C


Key Features

- Integrated bootstrap Diode⁽¹⁾
- Floating channel designed for bootstrap operation
- Fully operational to +350V
- Tolerant to negative transient voltage dV/dt immune
- U3115E Gate drive supply range from 9 to 20V
- VCC under-voltage protection
- 3.3V, 5V and 15V input logic compatible
- Cross-conduction prevention logic
- Matched propagation delay for both channels

Applications

- Home appliances
- Industrial applications and drives
- Motor drivers
- DC- AC Converter, PMDC and PMAC motors
- Induction heating
- HVAC

Packages

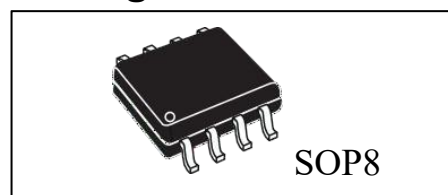


Product information

Base Part Number	Package Type	Standard OUT		V _{OFFSET}	Logic Control
		IO+	IO-		
U3115E	SOP8	1.0A	1.2A	350V	HIN & $\overline{\text{LIN}}$

Note: (1) When using internal diode bootstrap power supply, please match the capacitor and MOS, and fully test and verify

Pin Assignments

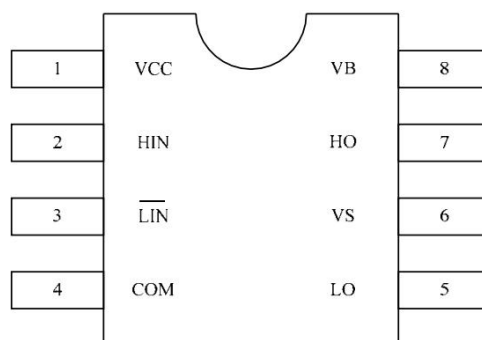


U3115E


Pin Function

Number	Symbol	Type	Description
1	VCC	P	Low side and logic fixed supply
2	HIN	I	High side driver logic input (active high)
3	$\overline{\text{LIN}}$	I	Low side driver logic input (active low)
4	COM	P	Low side return
5	LO	O	Low side gate drive output
6	VS	P	High side floating supply return
7	HO	O	High side gate drive output
8	VB	P	High side floating supply


Typical Connection

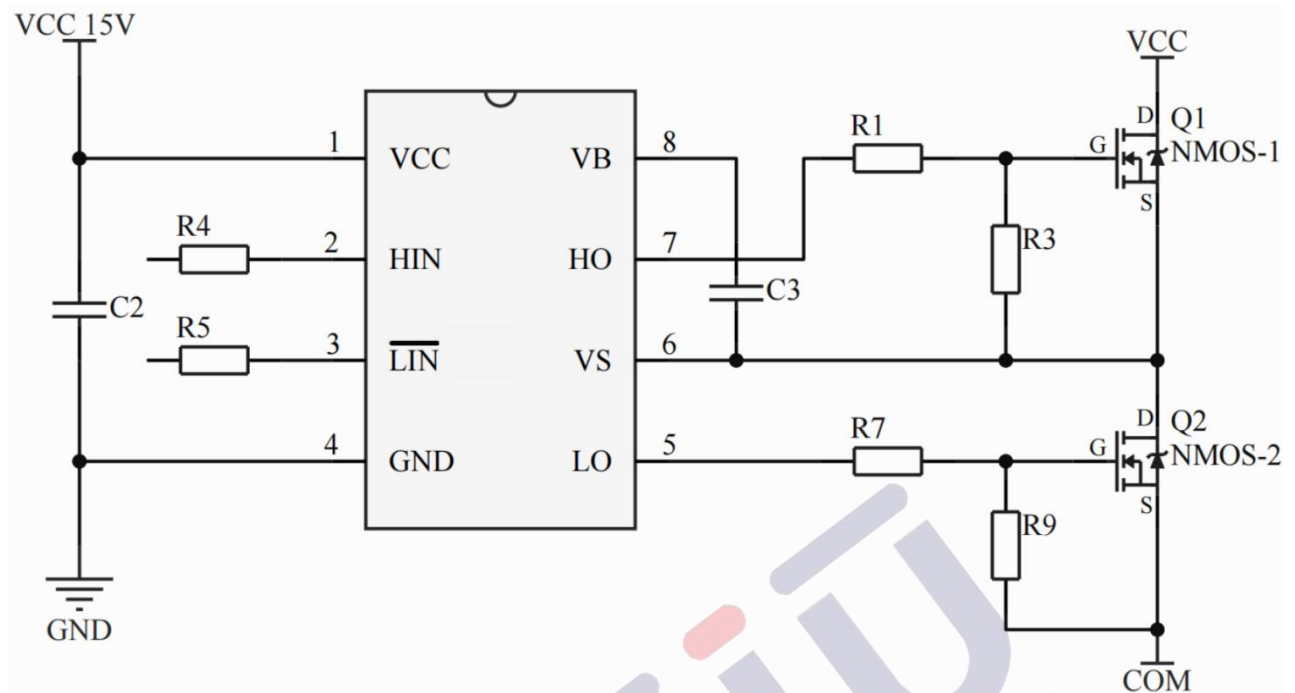

Small power application

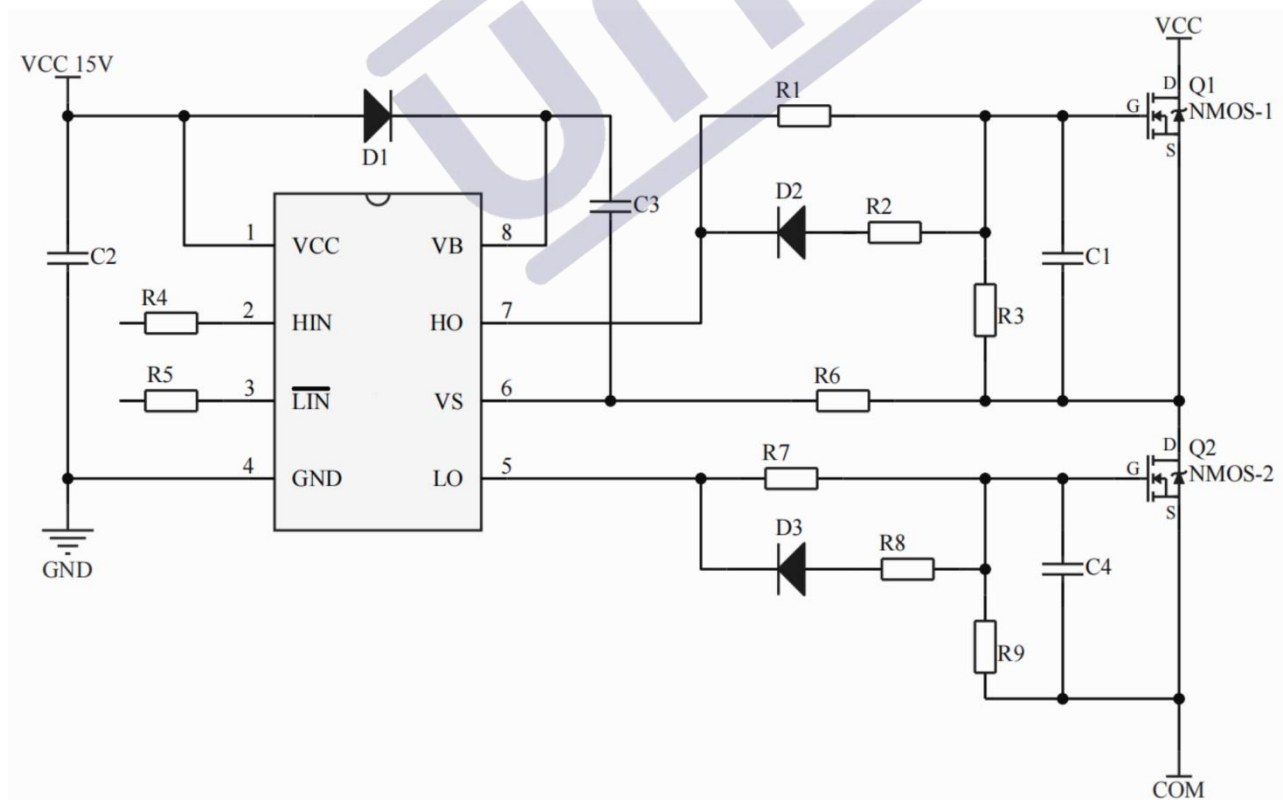

Typical application

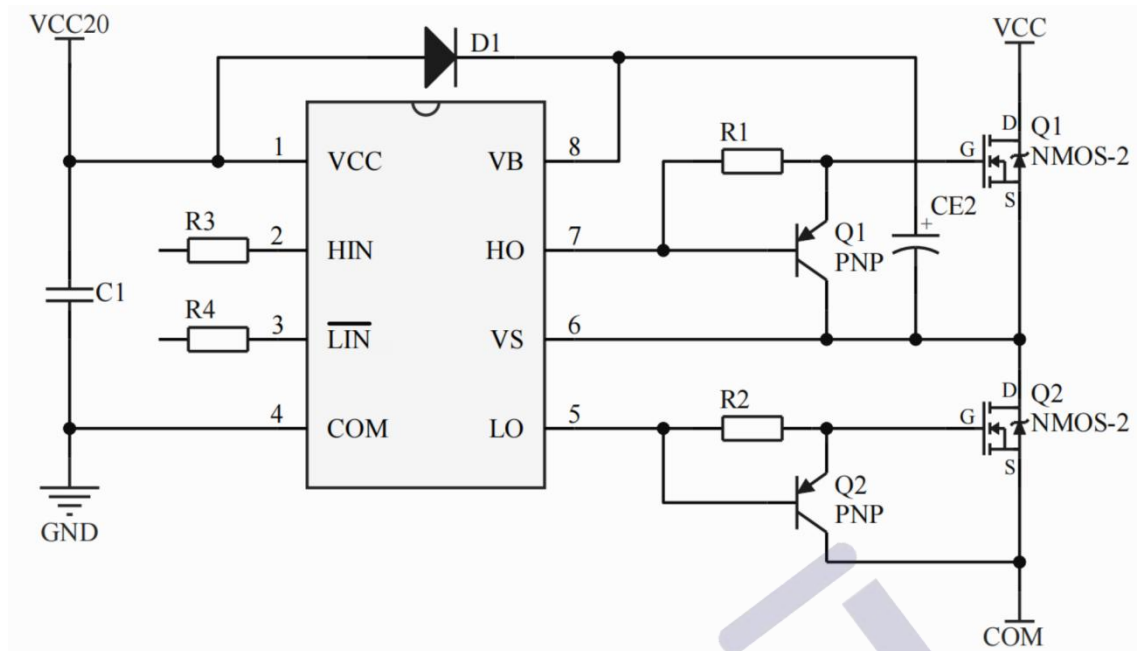

Much Big POWER application

Note: The above circuits and parameters are for reference only. The actual application circuit should be designed with the measured results in setting the parameters

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
VB	High side floating absolute voltage	-0.3	375	V
VS	High side floating supply offset voltage	VB-25	VB+0.3	
VHO	High side floating output voltage	VS-0.3	VB+0.3	
VLO	Low side output voltage	-0.3	Vcc+0.3	
Vcc	Low side and logic fixed supply voltage	-0.3	25	
VIN	Logic input voltage (HIN & LIN)	-0.3	Vcc+0.3	
dVS/dt	Allowable offset supply voltage transient	-	55	V/ns
PD	Package power dissipation @ TA≤+25°C	-	0.625	W
RthJA	Thermal resistance, junction to ambient	-	200	°C/W
TJ	Junction temperature	-35	150	°C
TS	Storage temperature	-55	150	
TL	Lead temperature (soldering, 10 seconds)	-	300	

Recommended Operating Conditions

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. The VS offset rating is tested with all supplies biased at 15V differential.

Symbol	Definition	Min.	Max.	Units
VB	High side floating supply absolute voltage	VS + 9	VS + 20	V
VS	High side floating supply offset voltage	-6(Note1)	350	
VHO	High side floating output voltage	VS	VB	
VLO	Low side output voltage	0	VCC	
VCC	Low side and logic fixed supply voltage	9	20	
VIN	Logic input voltage (HIN&LIN)	0	VCC	
TA	Ambient temperature	-40	150	°C

Note1: Logic operational for VS of -6 to +350V. Logic state held for VS of -6V to -VBS.

Dynamic Electrical Characteristics

$V_{CC} = V_{BS} = 15V, CL=1000pF, T_A = 25^{\circ}C$ unless otherwise specified.


Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-on propagation delay	—	450	550	ns	$V_S = 0V$
t_{off}	Turn-off propagation delay	—	150	250		$V_S = 90V$
t_r	Turn-on rise time	—	50	75		
t_f	Turn-off fall time	—	25	50		
DT	Deadtime, LS turn-off to HS turn- on & HS turn-on to LS turn-off	240	300	360		
MT	Delay matching, HS & LS turn-on/off	—	—	60		

Electrical Characteristic


$V_{CC} = V_{BS} = 15V, T_A = 25^{\circ}C$, unless otherwise specified.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
Low Side Power Supply Characteristics						
V _{CCUV+}	VCC supply under-voltage positive going threshold	—	8.8	9.7	V	
V _{CCUV-}	VCC supply under-voltage negative going threshold	—	8.2	9.1		
V _{CCHYS}	VCC supply under-voltage lockout hysteresis	-	0.6	—		
High Side Floating Power Supply Characteristics						
IQCC	Quiescent VCC supply current	—	70	—	uA	V _{IN} =0V or 5V
IQBS	Quiescent VBS supply current	—	0.1	—		V _{IN} =0V or 5V
ILK	Offset supply leakage current	-	-	30		VB =VS =90V
VIH	Logic “1” (HO) & Logic “0” (LO) input voltage	2.5	-	-	V	VCC=5V to 20V
VIL	Logic “0” (HO) & Logic “1” (LO) input voltage	-	1.6	-		VCC=5V to 20V
IIN+	Logic “1” input bias current	-	10	-	uA	V _{IN} =5V L _{IN} = 0V
IIN-	Logic “0” input bias current	-	-	1		V _{IN} =5V L _{IN} = 0V
VOH	High level output voltage, VBIAS - VO	-	-	100	mV	I _o = 0A
VOL	Low level output voltage, VO	-	-	100		I _o =0A
IO+	Output high short circuit pulsed current	-	1000	-	mA	VO= 0V, V _{IN} = V _{IH} PW ≤10 us VCC=VB=20V
IO-	Output low short circuit pulsed current	-	1200	-		





Block Diagram

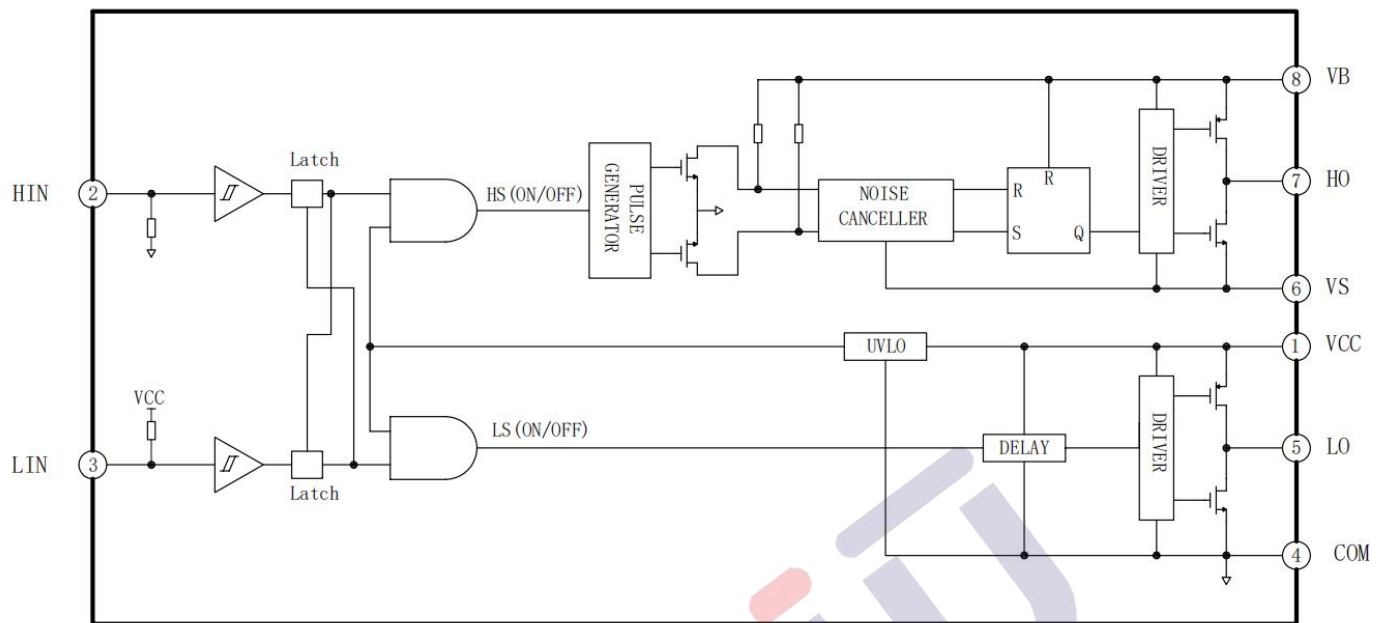

Time waveform


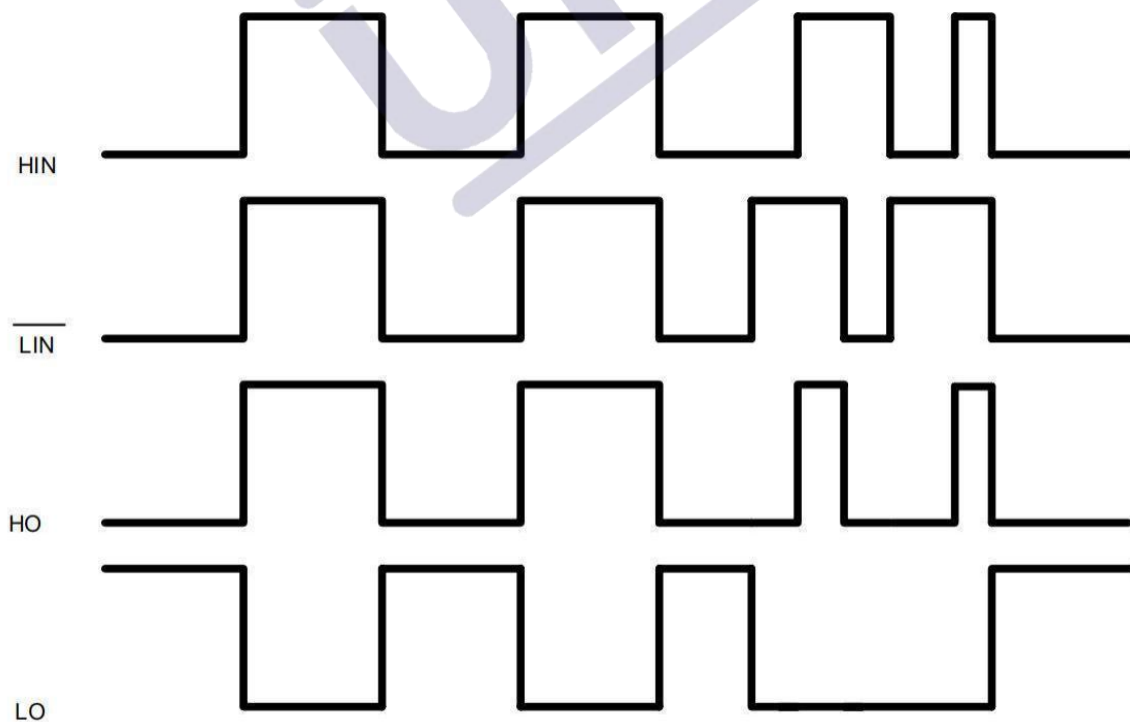


Time waveform

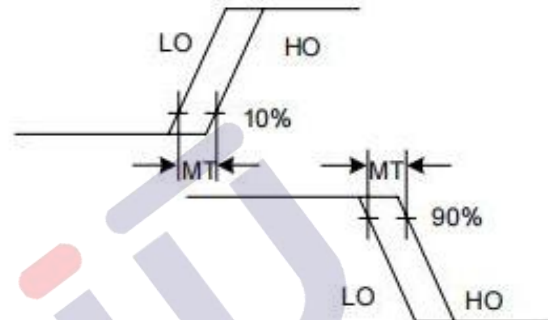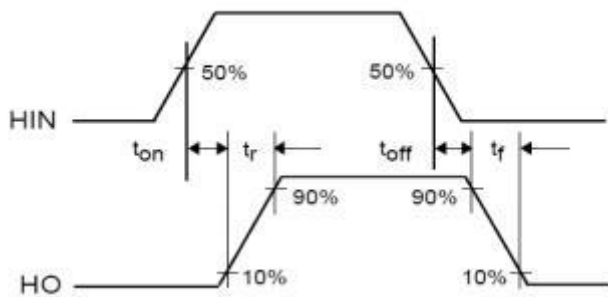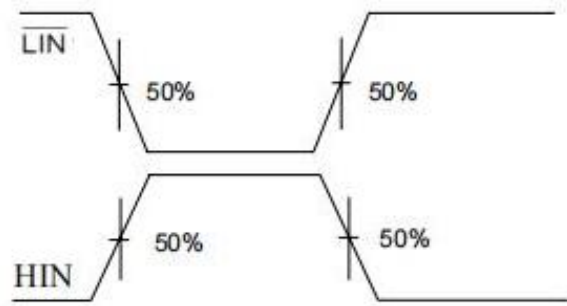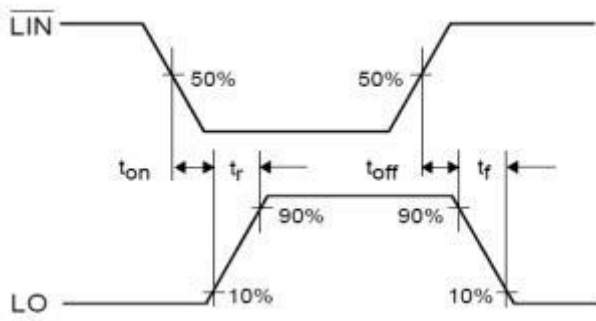


Switching Time Waveform Definitions

Delay matching time Definitions

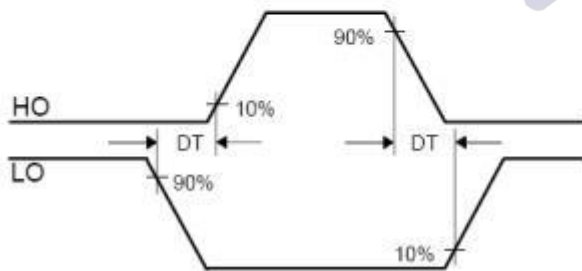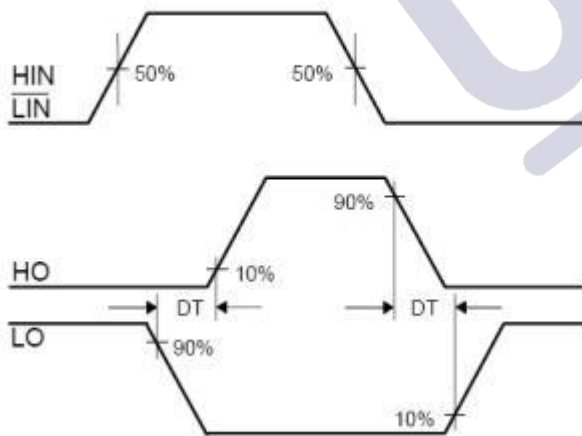


Deadtime Waveform Definitions

Packaging information SOP8

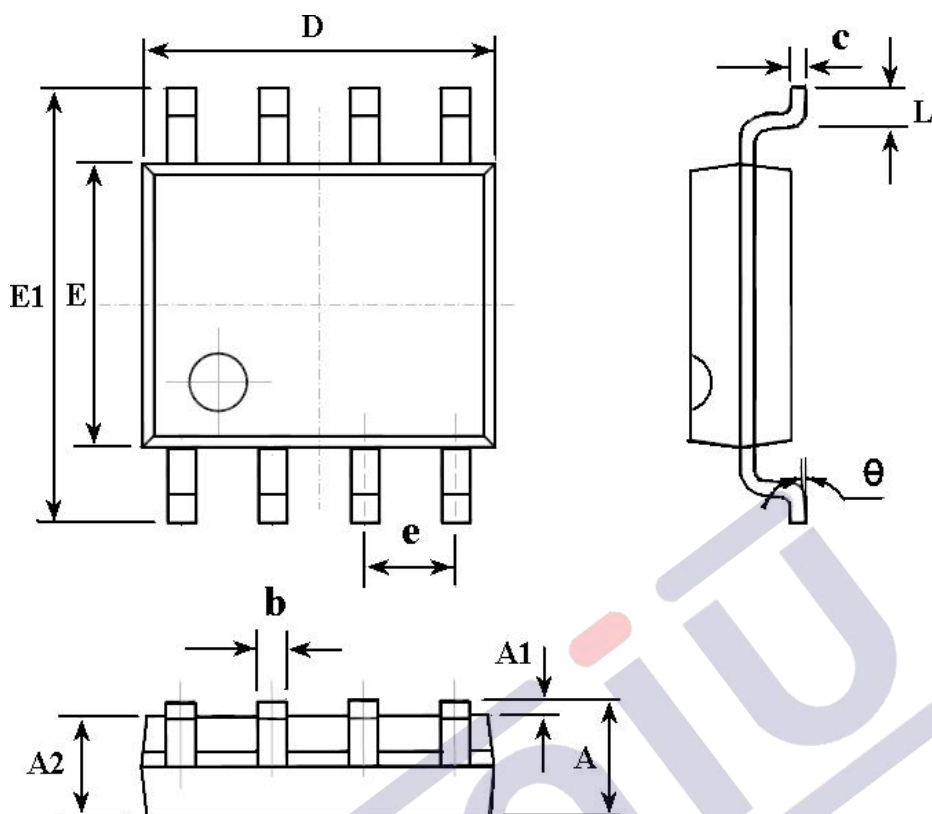


Symbol	Dimensions In Millimeters	
	Min	Max
A	1.350	1.750
A1	0.100	0.250
A2	1.350	1.550
b	0.330	0.510
c	0.170	0.250
D	4.700	5.100
E	3.800	4.000
E1	5.800	6.200
e	1.270(BSC)	
L	0.400	1.270
θ	0°	8°

Tape & Reel SOP8

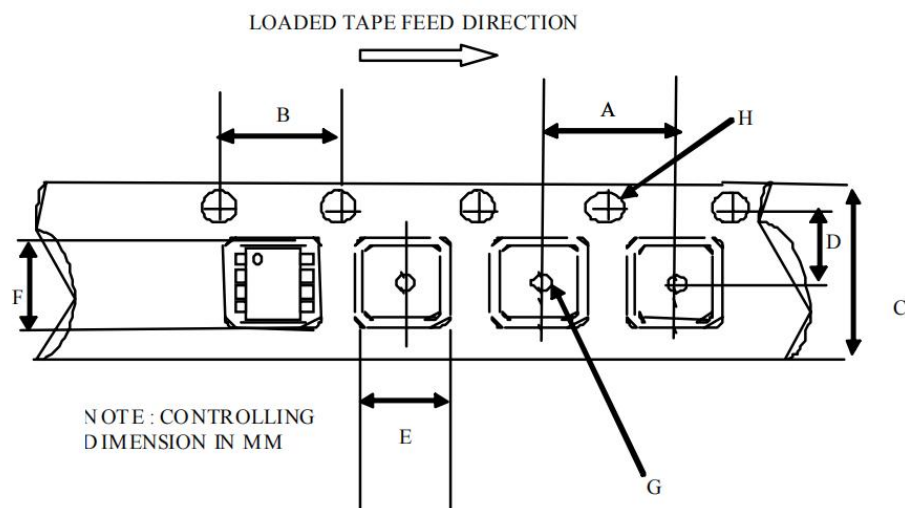

CARRIER TAPE DIMENSION FOR 8SOP

Code	Metric		Imperial	
	Min	Max	Min	Max
A	7.90	8.10	0.311	0.318
B	3.90	4.10	0.153	0.161
C	11.70	12.30	0.46	0.484
D	5.45	5.55	0.214	0.218
E	6.30	6.50	0.248	0.255
F	5.10	5.30	0.200	0.208
G	1.50	n/a	0.059	n/a
H	1.50	1.60	0.059	0.062

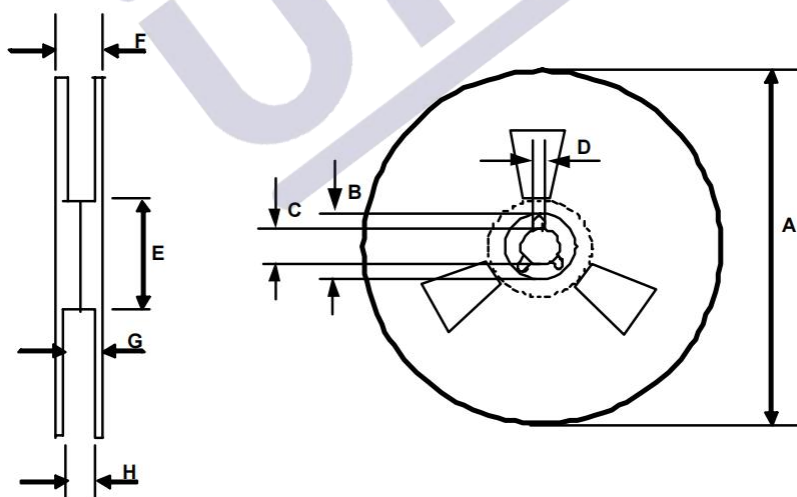

REEL DIMENSIONS FOR 8SOP

Code	Metric		Imperial	
	Min	Max	Min	Max
A	329.60	330.25	12.976	13.001
B	20.95	21.45	0.824	0.844
C	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
E	98.00	102.00	3.858	4.015
F	n/a	18.40	n/a	0.724
G	14.50	17.10	0.570	0.673
H	12.40	14.40	0.488	0.566

1、版本记录

DATE	REV.	DESCRIPTION
2020/04/19	1.0	首次发布
2023/09/10	1.1	参数优化
2024/06/25	1.2	标注电流测试条件

2、免责声明

浙江宇力微新能源科技有限公司保留对本文档的更改和解释权力，不另行通知！

客户在下单前应获取我司最新版本资料，并验证相关信息是否最新和完整。量产方案需使用方自行验证并自担所有批量风险责任。未经我司授权，该文件不得私自复制和修改。

产品不断提升，以追求高品质、稳定性强、可靠性高、环保、节能、高效为目标，我司将竭诚为客户提供性价比高的系统开发方案、技术支持等更优秀的服务。

版权所有 浙江宇力微新能源科技有限公司/绍兴宇力半导体有限公司

3、联系我们

浙江宇力微新能源科技有限公司

总部地址：绍兴市越城区斗门街道袍渚路25号中节能科创园45幢4/5楼

电话：0575-85087896（研发部）

传真：0575-88125157

E-mail:htw@uni-semic.com

无锡地址：江苏省无锡市锡山区先锋中路6号中国电子（无锡）数字芯城1#综合楼503室

电话:0510-85297939

E-mail:zh@uni-semic.com

深圳地址：深圳市宝安区西乡街道南昌社区宝源路泳辉国际商务大厦410

电话：0755-84510976

E-mail:htw@uni-semic.com