

#### **Features**

- Peak Forward Current: I<sub>FM</sub>=350 mA
- Power Dissipation of 200mw

## **Package Marking and Ordering Information**

Product ID	Pack	Marking	Qty(PCS)
SD103AWS	SOD-323	S4	3000
SD103BWS	SOD-323	S5	3000
SD103CWS	SOD-323	S6	3000



**SOD-323** 



#### Maxmim Ratings (Ta=25 unless otherwise noted)


Parameter	Symbol	SD103AWS	SD103BWS	SD103CWS	Unit
Peak Repetitive Peak Reverse Voltage	$V_{RRM}$				
Working Peak Reverse Voltage	$V_{RWM}$	40	30	20	V
DC Blocking Voltage	$V_R$				
RMS Reverse Voltage	$V_{R(RMS)}$	28	21	14	V
Forward Continuous Current	I <sub>FM</sub>	350			mA
Bcb!fepetitive Peak Forward Surge Current @t1, " a s	I <sub>FSM</sub>	2.0			А
Power Dissipation	Pd		mW		
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500			°C/W
Junction Temperature	Tj	-40~+125			°C
Storage Temperature	$T_{STG}$	-55~+150			°C


### Electrcal Charcteristics (Ta=25 unless otherwise specified)


Parameter	Symbol	Min	Тур	Max	Unit	Conditions
Reverse breakdown voltage						
SD103AWS	.,,	40			V	I <sub>R</sub> =100μA
SD103BWS	$V_{(BR)}$	30				I <sub>R</sub> =100μA
SD103CWS		20				I <sub>R</sub> =100μA
Forward voltage	V <sub>F</sub>			0.37	V	I <sub>F</sub> =20mA
				0.60		I <sub>F</sub> =200mA
Reverse current						
SD103AWS				5.0	μА	V <sub>R</sub> =30V
SD103BWS	I <sub>RM</sub>			5.0		V <sub>R</sub> =20V
SD103CWS	:ws					V <sub>R</sub> =10V
Capacitance between terminals	Ст			50	pF	<sub>R</sub> =0V,f=1.0MHz
Daviera managementina	t <sub>rr</sub>		10		ns	$I_F = I_R = 200 \text{mA}$
Reverse recovery time						Irr=0.1 $XI_R$ , $R_L$ =100 $\Omega$




# **Typical Characteristics**

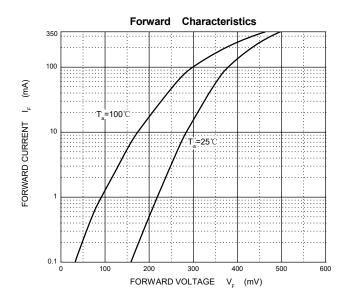

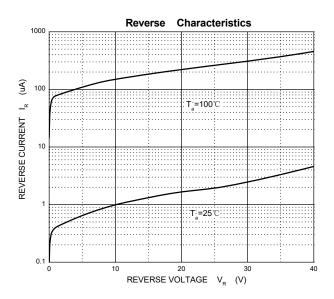


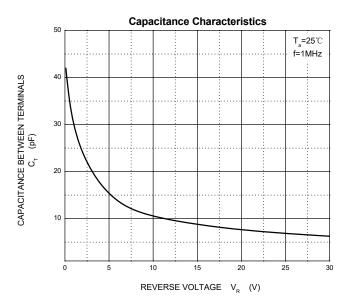


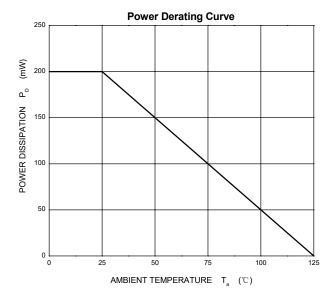




# Package Outline Dimensions SOD-323

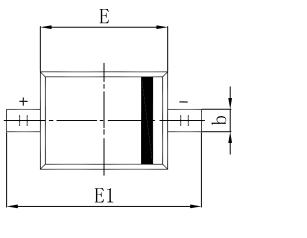



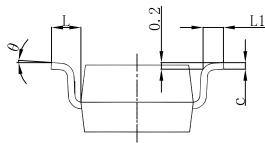

Symbol	Dimensions	In Millimeters	Dimensions In Inches		
	Min	Max	Min	Max	
Α		1.100		0.043	
A1	0.000	0.100	0.000	0.004	
A2	0.800	1.000	0.031	0.039	
b	0.250	0.350	0.010	0.014	
С	0.080	0.150	0.003	0.006	
D	1.200	1.400	0.047	0.055	
E	1.600	1.800	0.063	0.071	
E1	2.500	2.750	0.098	0.108	
L	0.475 REF		0.019 REF		
L1	0.250	0.400	0.010	0.016	
θ	0°	8°	0°	8°	

# SD103AWS~SD103CWS Schottky Rectifier Diodes

#### **Attention**

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.

  HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.