




**Part Number :** [1731120723](#)  
**Product Description :** FCT Machined Contact, Male, Crimp, 1.30µm Gold Plating, 28-26 AWG, 1000 Pieces  
**Series Number :** 173112  
**Status :** Active  
**Product Category :** D-Sub Contacts  
**Engineering Number :** FK20P26-13V-6096

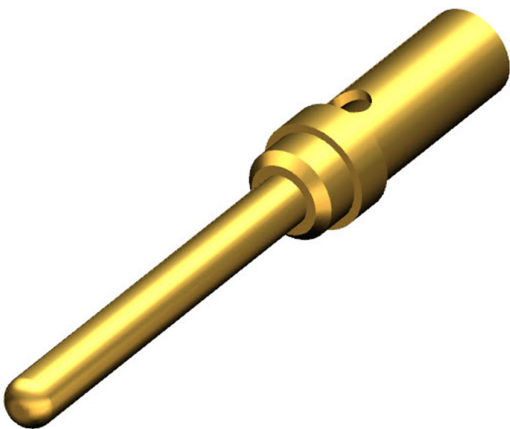


Documents & Resources

**Drawings**  
[1731120723\\_sd.pdf](#)

**Specifications**  
[1731120004-PK-000.pdf](#)  
[2195600650-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	D-Sub Contacts
Series	173112
Description	FCT Machined Contact, Male, Crimp, 1.30µm Gold Plating, 28-26 AWG, 1000 Pieces
Contact Type	Machined Crimp
Magnetic	Yes
Product Name	FCT Products
Type	Standard Density
UPC	191128856003

#### Electrical

Current - Maximum per Contact	7.5A
-------------------------------	------

#### Physical

Durability (mating cycles max)	500
Gender	Male
Material - Contact	Brass
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Gold over Nickel
Net Weight	0.100/g
Orientation	Straight
Packaging Type	Bag
Plating min - Mating	1.300µm
Plating min - Termination	1.300µm
Temperature Range - Operating	-55° to +130°C

Termination Style	Crimp
Wire Size (AWG)	26, 28

---

Use with Part(s)

Description	Part Number
Use With	FCT Standard-Density Connectors

---

Application Tooling

Global

Description	Part Number
FCT Hand Crimp Tool, Mini Frame, 8-Step Adjust	<u>1731121730</u>
FCT Locator for Size 20 Contacts, Plug and Socket	<u>1731121733</u>
FCT Installation and Removal Tool for D-Subs	<u>1731121744</u>

---