



0344



Basic Part Number	Board Thickness	Length V	Depth D
0344-1	.031	.062	.040
0344-2	.062	.094	.062
0344-3	.094	.125	.062
0344-4	.125	.156	.062

0344-X-19-XX-34-XX-10-0
Swage mount in .067 hole



0349



Basic Part Number	Board Thickness	Length V
0349-2	.062	.094
0349-3	.094	.125
0349-4	.125	.156

0349-X-31-XX-34-XX-10-0
Swage mount in .129 hole


0323/0324



Basic Part Number	Board Thickness	Length V
032X-1	.031	.062
032X-2	.062	.094
032X-3	.094	.125
032X-4	.125	.156
032X-5	.188	.219


0323-X-15-XX-34-XX-10-0
Swage mount in .094 hole

0348

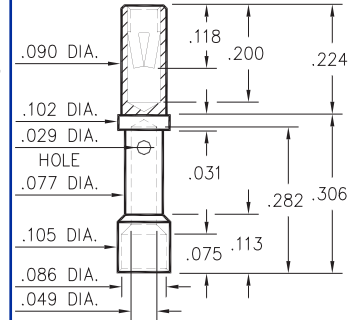


0348-0-33-XX-34-XX-10-0
#20A Crimp Barrel

0405




0405-0-15-XX-34-XX-04-0
Press-fit in .084 mounting hole

0336




0336-0-15-XX-34-XX-04-0
Press-fit in .089 mounting hole

0322



0322-0-15-XX-34-XX-10-0
Solder mount in .089 min. mounting hole

0325

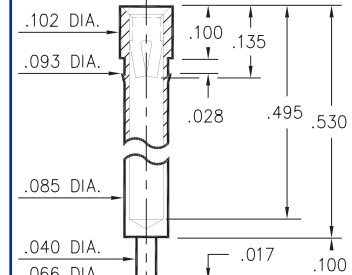

0325-0-15-XX-34-XX-10-0
Press-fit in .090 mounting hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

DIMENSION IN INCHES
TOLERANCES ON:
LENGTHS: ±.005
DIAMETERS: ±.002
ANGLES: ± 2°

ORDER CODE: XXXX - X - XX - XX - 34 - XX - XX - 0

BASIC PART # →
SPECIFY SHELL FINISH: →
01 200μ" TIN/LEAD OVER NICKEL
15 10μ" GOLD OVER NICKEL

SPECIFY CONTACT FINISH: →
01 200μ" TIN/LEAD OVER NICKEL
14 10μ" GOLD OVER NICKEL
27 30μ" GOLD OVER NICKEL

CONTACT

#34 CONTACT (DATA ON PAGE 212)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[0349-3-31-01-34-14-10-0](#) [0349-2-31-01-34-14-10-0](#) [0344-4-19-01-34-14-10-0](#) [0323-4-15-01-34-14-10-0](#) [0325-0-15-01-34-14-10-0](#) [0324-2-15-01-34-14-10-0](#) [0324-5-15-01-34-14-10-0](#) [0323-2-15-01-34-14-10-0](#) [0324-4-15-01-34-14-10-0](#) [0344-1-19-01-34-14-10-0](#) [0323-5-15-01-34-14-10-0](#) [0324-3-15-01-34-14-10-0](#) [0323-3-15-01-34-14-10-0](#) [0349-4-31-01-34-14-10-0](#) [0344-3-19-01-34-14-10-0](#) [0323-2-15-15-34-14-10-0](#) [0325-0-15-15-34-14-10-0](#) [0324-2-15-15-34-14-10-0](#) [0324-5-15-15-34-14-10-0](#) [0323-5-15-15-34-14-10-0](#)