



RJ45 AND USB 2.0

# Contacts, Tools, and Accessories



## 667-218 Receptacle Metal Protective Covers for Mighty Mouse Series 801 Connectors

**Protect Connectors From Damage** Machined aluminum covers have rubber gaskets for a watertight fit.


**Stainless Steel Fittings and Rings** Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets.

**Polyurethane-Coated SST Wire Rope** offers high strength, excellent abrasion resistance and good flexibility. Or, select a fluoropolymer jacket for high temperature exposure.

**Braided Nylon Rope** provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order						
Sample Part Number	667-218	-M	-G	9	04	-6
Series (See Table I)	667-218 = Receptacle Cover (see note 1)					
Material and Finish	<b>M</b> = Aluminum/Electroless Nickel RoHS Compliant <b>MT</b> = Aluminum/Nickel-PTFE RoHS Compliant <b>NF</b> = Aluminum/Cadmium with Olive Drab Chromate <b>ZNU</b> = Aluminum/Zinc-Nickel with Black Chromate <b>Z1</b> = Stainless Steel/Passivated RoHS Compliant					
Attachment Type	<b>D</b> = Bead Chain, CRES, Passivate <b>G</b> = Nylon Rope <b>N</b> = No Attachment <b>S</b> = SST Sash Chain <b>T</b> = SST Wire Rope, No Jacket "SST" = Stainless Steel <b>F</b> = Wire Rope, Nylon Jacket <b>H</b> = SST Wire Rope, Fluoropolymer Jacket <b>R</b> = Wire Rope, PVC Jacket <b>SK</b> = Nylon Rope With Slip Knot <b>U</b> = SST Wire Rope, Polyurethane Jacket					
Shell Size	8, 16, 17, 19					
Attachment Code (See Table II)	Small Ring (Attached to Panel)= 01 thru 06 Solid Ring (Rear Panel Mount Jam Nut Application) = 14 thru 33					
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example "-6" equals six inch length					

Table I: Cover Style



667-218

Receptacle Cover

### NOTES

- For plug covers contact factory
- Material and Finish
  - Cover: Aluminum alloy or stainless steel
  - Gasket: Fluorosilicone rubber
  - Wire, Hardware: Stainless steel, passivated





RJ45 AND USB 2.0

# Contacts, Tools, and Accessories




## 667-218 Receptacle Metal Protective Covers for Mighty Mouse Series 801 Connectors

### 667-218 Cover Attachment for RPM Jam Nut Receptacle

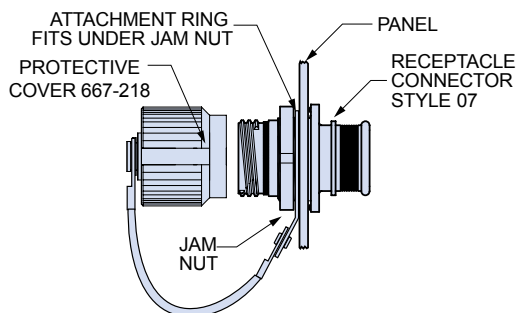

Solid Ring

Atttchmt Code	Shell Size	Ring I.D.		Ring O.D.	
		In. ± .010	mm. ±0.25	In. ± .015	mm. ± 0.38
16	8	.570	14.48	.69	17.40
20	16	1.070	27.17	1.20	30.35


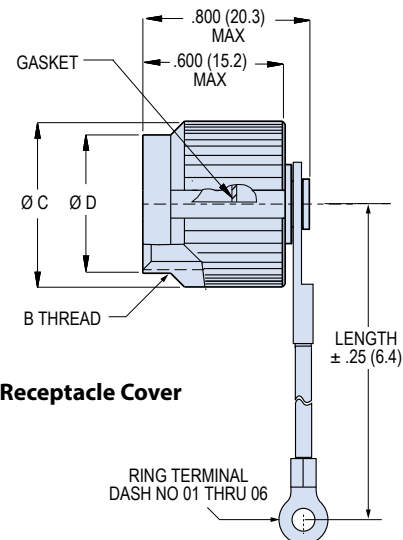


667-218 Receptacle Cover

### Dimensions

Shell Size	Ø A Max.		Ø B Max.		Ø D Max.		C Thread
	In.	mm.	In.	mm.	In.	mm.	
8	.653	16.6	.675	17.15	.587	14.9	.5000-.05-1L
16	1.150	29.2	1.261	32.03	1.092	27.7	1.000-.1P-.2L

### 667-218 Cover Attachment to a Panel with a Screw

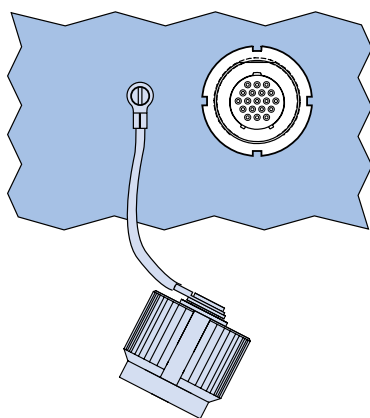

Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Atttchmt Code	Screw Size	Ring I.D.		Ring O.D.	
		In. ±.005	mm. ±0.13	In. Max.	mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

### Lanyard Options

	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
	Stainless steel, #8 chain, .240" (6mm)
	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

Series 80 Mighty Mouse

M

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Glenair:

[667-218-M-H816-4](#) [667-218-M-H615-5](#) [667-218-NF-U906-7](#) [667-218-MT-F1018-6](#) [667-218-NF-G615-4](#) [667-218-NF-U806-5](#) [667-218-NF-H901-6](#) [667-218-M-U917-4](#) [667-218-ZNU-U1001-3.5](#) [667-218-Z1-S604-5](#) [667-218-NF-U601-4](#) [667-218-NF-H801-5](#) [667-218-M-G702-4](#) [667-218-M-H1306-6](#) [667-218-ZR-G701-6](#) [667-218-ZR-G901-6](#) [667-218-M-T1923-6](#) [667-218-ZNU-U1301-3.5](#) [667-218-NF-U2102-4](#) [667-218-NF-H601-5](#) [667-218-M-S1901-6](#) [667-218-MT-U1632-6](#) [667-218-MT-U632-6](#)