

# **Generation 6 CXM-9 COB Arrays** White LED





#### **Features:**

- High lumen output and efficacy typical
  - Over 1710 lm, 143 LPW @ 3000K, 90CRI, T<sub>i</sub> = 85°C
- CCT range 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K and 6500K
- 3 SDCM and 2 SDCM color binning standard
- Excellent optical emission uniformity and color over angle consistency
- Superior thermal conductivity for uniform heat spreading
- Environmentally friendly: RoHS and REACH compliant
- ENEC certification









## **Applications**

- Spotlights/Track Lights
- Downlights
- **Shop Lighting**
- Hospitality Lighting

- Architectural and Specialty
- Street Lighting
- Parking Lot and Area Lighting
- Tunnel Lighting

# **Contents**

Part Number Nomenclature 2
CCT, CRI & R9 Specification2

Chromaticity Bin Structure	.3
Ordering Part Numbers	.4

Operating Characteristics	8

Optical and Electrical Charac	-
teristics	9
Typical Spectrum 10	0

Radiation Pattern	 10

Mechanical Dimension				
Shipping Container	11			

Label Information	12

Technology Review 1	3
---------------------	---

Test Specifications	13
Handling Notes	14

## **Part Number Nomenclature**

All Luminus COB products are packaged and labeled with part numbers as outlined in the table on page 4. Luminus may include any smaller chromaticity bin that is contained in the larger bin as part of the ordered part. When shipped, each package will contain only a single flux and chromaticity bin. The part number designation is as follows:

CXM -	— 9 –	– NN –	– XX –	– VV –	- QQPP -	— FG -	– W
Product Family	LES <sup>1</sup>	CCT <sup>2</sup>	Min. CRI <sup>3</sup>	Typical Voltage	Package Configurator <sup>4</sup>	Flux Bin	Chromaticity Bin
Chip on Board, Multi-die	9mm LES diameter	See Note 2 below	CRI See Table Below	Volts (V)	TC60 TA60	Lumens	See page 3 for bins

#### Notes:

- 1. Light Emitting Surface (LES) Diameter.
- 2. Correlated Color Temperature (CCT), NN nomenclature corresponds to the following:

22 = 2200K

24 = 2400K

27 = 2700K

30 = 3000K

35 = 3500K40 = 4000K

50 = 5000K

65= 6500K

- 3. Minimum Color Rendering Index (CRI).
- 4. TC is a standard substrate with sulfur resistance process, TA is an alternative substrate; 6 means gen 6 COB products, 0 means a product with chromaticity on the BBL, 2 stand for chromaticity Below BBL.
- 5. Luminus part numbers may be accompanied by prefixes or suffixes. The most common is the "Rev01" suffix indicating a part is fully released and carries a full warranty. These additional characters may appear on shipping labels, packing slips and invoices. In all cases the basic part number described above will always be included.


## **CCT, CRI and R9 Values**

Correlated Color Temperatures	XX Value	CRI	*R9
2700K, 3000K, 3500K, 4000K, 5000K, 6500K	80	>80	>0
2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K	90	>90	>50
2700K, 3000K	05	. 05	>80
3500K, 4000K, 5000K	95	>95	>70

Note: R9 values have a tolerance of +/- 5%

# **Chromaticity Bin Structure**

Chromaticity Bins: 1931 CIE Color Space

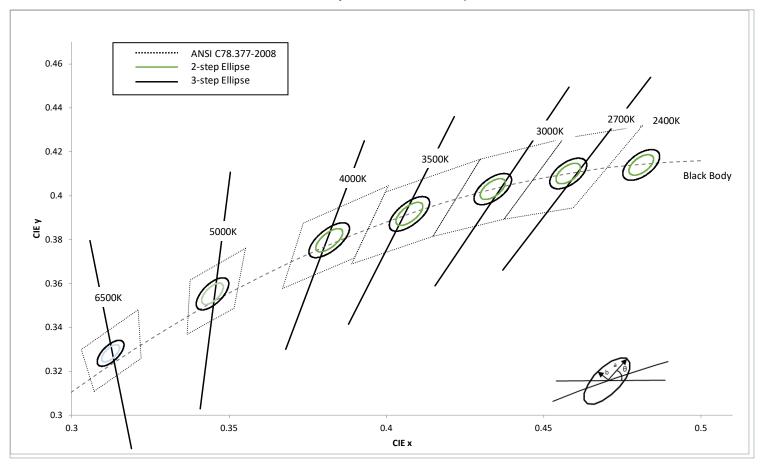

The following tables describe the chromaticity bin center points, the orientation angle for the MacAdam ellipse ( $\theta$ °), and the maximum radii for the ellipses. The ANSI Bin is provided for reference.

ССТ	Center Point		Angle 3-step		p Bin	2-ste	2-step Bin	
CCI	CIEx	CIEy	θ (°)	a	b	a	b	
2200K	0.5014	0.4153	53.7	0.0081	0.0042	0.0054	0.0028	
2400K	0.4810	0.4140	53.7	0.0081	0.0042	0.0054	0.0028	
2700K	0.4578	0.4101	53.7	0.0081	0.0042	0.0054	0.0028	
3000K	0.4338	0.4030	53.2	0.0083	0.0041	0.0056	0.0027	
3500K	0.4073	0.3917	54.0	0.0093	0.0041	0.0062	0.0028	
4000K	0.3818	0.3797	53.7	0.0094	0.0040	0.0063	0.0027	
5000K	0.3447	0.3553	59.6	0.0082	0.0035	0.0056	0.0024	
6500K	0.3123	0.3282	58.6	0.0067	0.0029	0.0046	0.0019	

Note: Luminus maintains a +/- 0.005 tolerance on chromaticity (CIEx and CIEy) measurements

# **Ordering Part Numbers - TA60**

The following tables describe products with typical flux and minimum flux measured at 360mA and specified at  $T_j = 85$ °C. The values at 25°C are calculated and shown for reference only.

	Output Flux (lm)			Color	Ordering Part Number		
ССТ	Typ. (85°C)	Min. (85°C)	Calculated Typ. (25°C)	Rendering Index (min.)	3-step MacAdam Ellipse	2-step MacAdam Ellipse	
2200K	1405	1305	1545	90	CXM-9-22-90-36-TA60-F7-3	CXM-9-22-90-36-TA60-F7-2	
2400K	1525	1420	1680	90	CXM-9-24-90-36-TA60-F7-3	CXM-9-24-90-36-TA60-F7-2	
	1855	1725	2040	80	CXM-9-27-80-36-TA60-F7-3	CXM-9-27-80-36-TA60-F7-2	
2700K	1645	1530	1810	90	CXM-9-27-90-36-TA60-F7-3	CXM-9-27-90-36-TA60-F7-2	
	1380	1280	1515	95	CXM-9-27-95-36-TA60-F7-3	CXM-9-27-95-36-TA60-F7-2	
	1955	1820	2150	80	CXM-9-30-80-36-TA60-F7-3	CXM-9-30-80-36-TA60-F7-2	
3000K	1710	1585	1875	90	CXM-9-30-90-36-TA60-F7-3	CXM-9-30-90-36-TA60-F7-2	
	1455	1350	1600	95	CXM-9-30-95-36-TA60-F7-3	CXM-9-30-95-36-TA60-F7-2	
	1995	1855	2190	80	CXM-9-35-80-36-TA60-F7-3	CXM-9-35-80-36-TA60-F7-2	
3500K	1750	1625	1925	90	CXM-9-35-90-36-TA60-F7-3	CXM-9-35-90-36-TA60-F7-2	
	1520	1410	1670	95	CXM-9-35-95-36-TA60-F7-3	CXM-9-35-95-36-TA60-F7-2	
	2035	1895	2240	80	CXM-9-40-80-36-TA60-F7-3	CXM-9-40-80-36-TA60-F7-2	
4000K	1790	1665	1970	90	CXM-9-40-90-36-TA60-F7-3	CXM-9-40-90-36-TA60-F7-2	
	1600	1490	1760	95	CXM-9-40-95-36-TA60-F7-3	CXM-9-40-95-36-TA60-F7-2	
	2070	1925	2275	80	CXM-9-50-80-36-TA60-F7-3	CXM-9-50-80-36-TA60-F7-2	
5000K	1785	1660	1965	90	CXM-9-50-90-36-TA60-F7-3	CXM-9-50-90-36-TA60-F7-2	
	1680	1560	1845	95	CXM-9-50-95-36-TA60-F7-3	CXM-9-50-95-36-TA60-F7-2	
6500V	2005	1865	2205	80	CXM-9-65-80-36-TA60-F7-3	CXM-9-65-80-36-TA60-F7-2	
6500K	1795	1670	1975	90	CXM-9-65-90-36-TA60-F7-3	CXM-9-65-90-36-TA60-F7-2	

Note: Luminus maintains a +/- 6% tolerance on flux measurements. Luminus maintains a +/- 2% tolerance on CRI measurements.

© 2024

# **Ordering Part Numbers - TC60**

The following tables describe products with typical flux and minimum flux measured at 360mA and specified at  $T_j = 85$ °C. The values at 25°C are calculated and shown for reference only.


	Output Flux (lm)			Color	Ordering Part Number		
ССТ	Typ. (85°C)	Min. (85°C)	Calculated Typ. (25°C)	Rendering Index (min.)	3-step MacAdam Ellipse	2-step MacAdam Ellipse	
2200K	1405	1305	1545	90	CXM-9-22-90-36-TC60-F7-3	CXM-9-22-90-36-TC60-F7-2	
2400K	1525	1420	1680	90	CXM-9-24-90-36-TC60-F7-3	CXM-9-24-90-36-TC60-F7-2	
	1855	1725	2040	80	CXM-9-27-80-36-TC60-F7-3	CXM-9-27-80-36-TC60-F7-2	
2700K	1645	1530	1810	90	CXM-9-27-90-36-TC60-F7-3	CXM-9-27-90-36-TC60-F7-2	
	1380	1280	1515	95	CXM-9-27-95-36-TC60-F7-3	CXM-9-27-95-36-TC60-F7-2	
	1955	1820	2150	80	CXM-9-30-80-36-TC60-F7-3	CXM-9-30-80-36-TC60-F7-2	
3000K	1710	1585	1875	90	CXM-9-30-90-36-TC60-F7-3	CXM-9-30-90-36-TC60-F7-2	
	1455	1350	1600	95	CXM-9-30-95-36-TC60-F7-3	CXM-9-30-95-36-TC60-F7-2	
	1995	1855	2190	80	CXM-9-35-80-36-TC60-F7-3	CXM-9-35-80-36-TC60-F7-2	
3500K	1750	1625	1925	90	CXM-9-35-90-36-TC60-F7-3	CXM-9-35-90-36-TC60-F7-2	
	1520	1410	1670	95	CXM-9-35-95-36-TC60-F7-3	CXM-9-35-95-36-TC60-F7-2	
	2035	1895	2240	80	CXM-9-40-80-36-TC60-F7-3	CXM-9-40-80-36-TC60-F7-2	
4000K	1790	1665	1970	90	CXM-9-40-90-36-TC60-F7-3	CXM-9-40-90-36-TC60-F7-2	
	1600	1490	1760	95	CXM-9-40-95-36-TC60-F7-3	CXM-9-40-95-36-TC60-F7-2	
	2070	1925	2275	80	CXM-9-50-80-36-TC60-F7-3	CXM-9-50-80-36-TC60-F7-2	
5000K	1785	1660	1965	90	CXM-9-50-90-36-TC60-F7-3	CXM-9-50-90-36-TC60-F7-2	
	1680	1560	1845	95	CXM-9-50-95-36-TC60-F7-3	CXM-9-50-95-36-TC60-F7-2	
6E00V	2005	1865	2205	80	CXM-9-65-80-36-TC60-F7-3	CXM-9-65-80-36-TC60-F7-2	
6500K	1795	1670	1975	90	CXM-9-65-90-36-TC60-F7-3	CXM-9-65-90-36-TC60-F7-2	

Note: Luminus maintains a +/-6% tolerance on flux measurements. Luminus maintains a +/-2% tolerance on CRI measurements.

PDS-003319 Rev 02



Chromaticity Bins: 1931 CIE Color Space

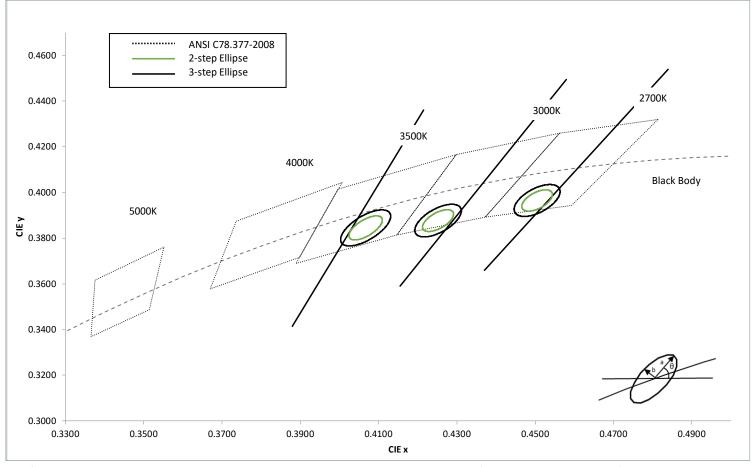

The following tables describe the chromaticity bin center points, the orientation angle for the MacAdam ellipse ( $\theta$ °), and the maximum radii for the ellipses. The ANSI Bin is provided for reference.

CCT	Cente	r Point	Angle	3-step Bin		2-step Bin	
ССТ	CIEx	CIEy	θ (°)	a	b	a	b
2700K	0.4505	0.3965	53.7	0.0081	0.0042	0.0054	0.0028
3000K	0.4252	0.3877	53.6	0.0083	0.0041	0.0056	0.0027
3500K	0.4067	0.3845	54.0	0.0093	0.0041	0.0061	0.0028

Note: Luminus maintains a +/-0.005 tolerance on chromaticity (CIEx and CIEy) measurements

# **Generation 6 CXM-9 Product Datasheet**

# Ordering Part Numbers - TC/TA62 Sensus (BBBL)

The following tables describe products with typical flux and minimum flux measured at 360mA and specified at  $T_i = 85$  °C. The values at 25°C are calculated and shown for reference only.

	Output Flux (lm)			Color	Ordering Part Number		
ССТ	Typ. (85°C)	Min. (85°C)	Calculated Typ. (25°C)	Rendering Index (min.)	3-step MacAdam Ellipse	2-step MacAdam Ellipse	
27001/	1565	1455	1725	00	CXM-9-27-90-36-TC62-F7-3	CXM-9-27-90-36-TC62-F7-2	
2700K	1565	1455	1725	90	CXM-9-27-90-36-TA62-F7-3	CXM-9-27-90-36-TA62-F7-2	
200014	1660	1545	1830	90	CXM-9-30-90-36-TC62-F7-3	CXM-9-30-90-36-TC62-F7-2	
3000K					CXM-9-30-90-36-TA62-F7-3	CXM-9-30-90-36-TA62-F7-2	
3500V	1705	1705 1585	1875	90	CXM-9-35-90-36-TC62-F7-3	CXM-9-35-90-36-TC62-F7-2	
3500K					CXM-9-35-90-36-TA62-F7-3	CXM-9-35-90-36-TA62-F7-2	

*Note:* Luminus maintains a +/- 6% tolerance on flux measurements. Luminus maintains a +/- 2% tolerance on CRI measurements.

www.luminus.com

© 2024

# **Operating Characteristics**<sup>1</sup>

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Forward Current <sup>2</sup>	I <sub>f</sub>		360	1000	mA
Forward Voltage <sup>3</sup>	V <sub>f</sub>	31.4	33.2	37.4	V
Power			12	37.4	W
Operating Case Temperature	T <sub>c</sub>			120	°C
Light Emitting Surface Diameter <sup>4</sup>	LES		9.6		mm
Thermal Resistance (junction-to-case)	$\Theta_{jc}$		0.32		°C/W
Junction Temperature	T <sub>i</sub>			140	°C
Viewing Angle			120		Degree


#### Notes:

- 1. Device measurements are at Tj = 85°C.
- 2. To prevent damage refer to operating conditions and derating curves for appropriate maximum operating conditions
- 3. Voltage is rated at typical forward current. For voltage at higher drive current, refer to performance graphs.
- 4. Luminus designed a complex, unique phosphor ring. The LES diameter is defined consistent with industry practices and aligned to optical characteristics. The LES diameter is not measured at the surface of the phosphor layer. Please use ray files for all optics designs.
- 5. Device operation not recommended at drive currents less than 10% of the typical value
- 6. Caution must be taken not to stare at the light emitted from these LEDs. Under special circumstances, the high intensity could damage the eye.
- $7. \ \textit{All product operating specifications are subject to change without advance notice.} \\$


© 2024

# **Optical & Electrical Characteristics**


## Relative Output Flux vs. Forward Current @ 85°C

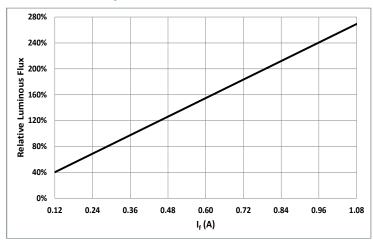


## Forward Current vs. Forward Voltage @ 85°C

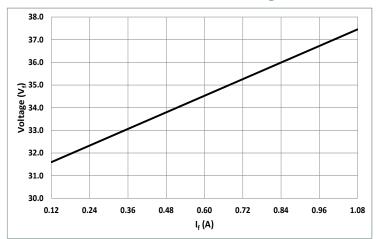


#### **Relative Output Flux vs. Junction Temperature**

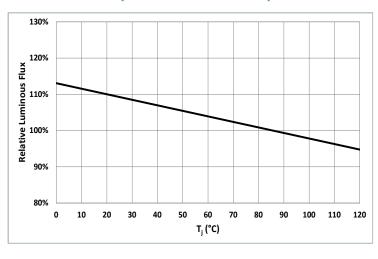


**Change in Voltage vs. Junction Temperature** 

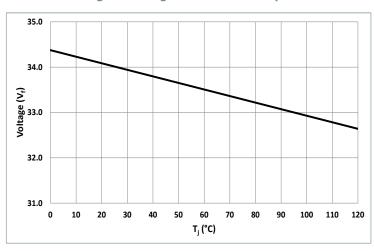


## Change in CIE\_x/y vs. Junction Temp. (3000K, 90CRI)

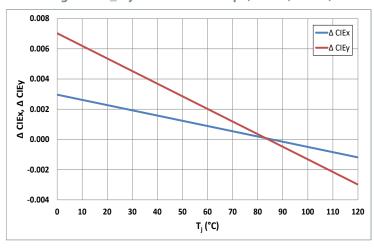

Change in CIE\_x/y vs. Forward Current (3000K, 90CRI)

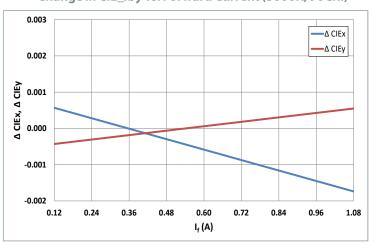


# **Typical Spectrum**

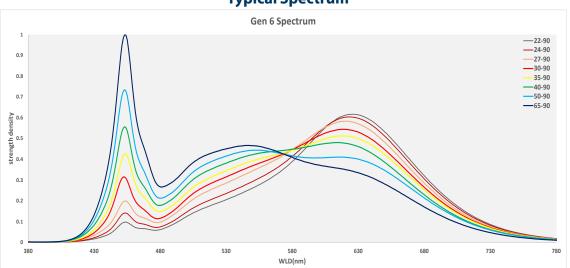


## **Radiation Pattern**


**Typical Polar Radiation Pattern** 

**Typical Angular Radiation Pattern** 

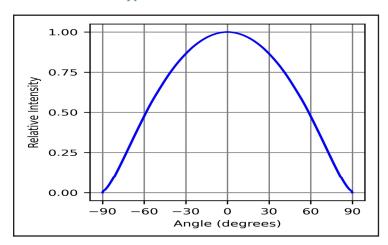

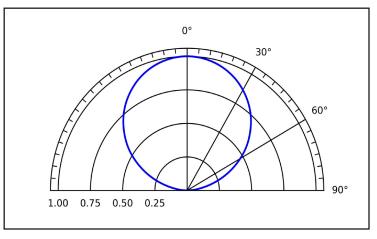


# **Derating Curve**

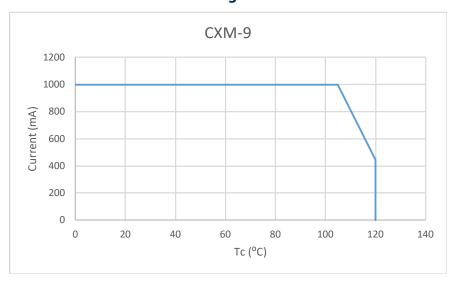


## **Mechanical Dimensions - TA60**

Note: Unless otherwise specified, tolerance is  $\pm 0.3$ mm

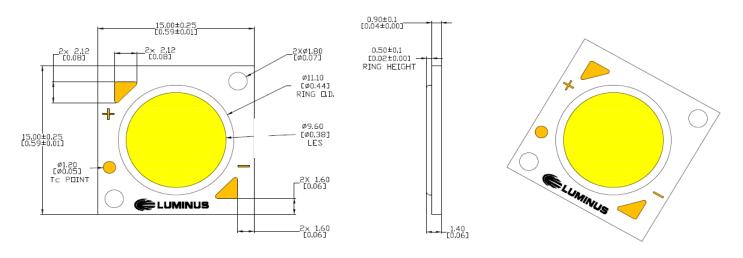

# **Shipping Container - TA60**

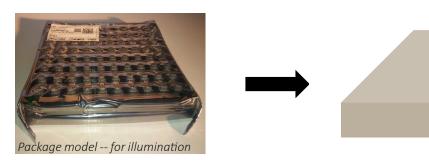

Note: 60 pcs per tray and 5 trays are stacked together to be sealed in an anti-static bag.

Note: The anti-static bag is boxed for easier storage, 300pcs per box.


**ELUMINUS** 

1195794733

www.luminus.com

## **Mechanical Dimensions - TC60**

Note: Unless otherwise specified, tolerance is  $\pm 0.3$ mm

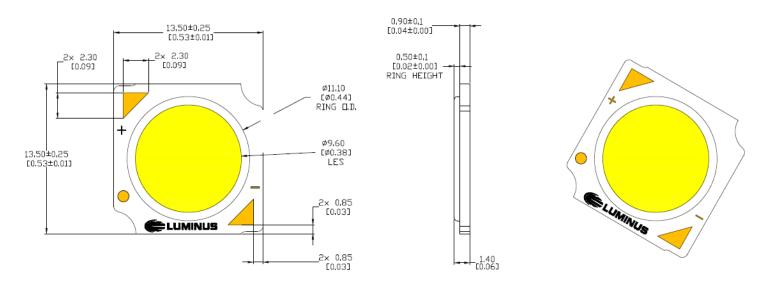

## **Shipping Container - TC60**




Note: 80 pcs per tray and 5 trays are stacked together to be sealed in an anti-static bag.



Note: The anti-static bag is boxed for easier storage, 400pcs per box.

### **Label Information**



Label model -- for illustration only

#### Notes:

- 1 Manufacturer part number, flux bin and chromaticity bin
- 2 Customer part number
- (3) Rev.01 indicates a fully released product
- 4 Box ID
- (5) Production ID
- (6) Total number of units in a box

# Generation 6 CXM-9 Product Datasheet

# **Technology Overview**

Luminus Chip-on-Board (COB) LED series have consistently delivered the highest lumen performance with the best color quality of any COB supplier. Driving performance enhancements through more than 5 generations of COB products has provided Luminus a comprehensive understanding of the lighting market for directional sources positioning Luminus as the COB manufacturer of choice for the most discriminating lighting manufacturers.

#### Reliability

Designed from the ground up, the Luminus COB LED is one of the most reliable light sources in the world today.

#### **UL and IEC Recognized Compliance**

Luminus COB arrays are tested in accordance with ANSI/UL 8750 to ensure safe operation for their intended applications. Further, Luminus maintains IEC-62031 safety ratings on all COB products.

#### **REACH & RoHS Compliance**

All LED products manufactured by Luminus are REACH and RoHS compliant and free of hazardous materials, including lead and mercury.

## **Test Specifications**

Every Luminus LED is fully tested to ensure it meets the high quality standards customers have come to expect from Luminus' products.

#### **Traceability**

Each Luminus COB LED is marked with a 2D bar code that contains a unique serial number. With this serial number, Luminus has the ability to provide customers with actual test data measurements for a specific LED. In addition, the 2D bar code is linked to manufacturing date codes that enables traceability of production processes and materials.

### **Testing Temperature**

Luminus COB products are measured at temperatures typical for the LED operating in the fixture. Each device is tested at 85°C junction temperature eliminating the need to scale data sheet specifications to real world situations.

#### **Chromaticity Bin Range**

Chromaticity binning delivers color consistency for every order. Standard products are delivered with a 3-step MacAdam ellipse. This ensures color performance matching in the application. For the most demanding application, Luminus is one of only a few companies that can provide a 2 SDCM bin distribution. These tightly controlled, small distribution bins provide customers predictable, repeatable colors.

## **Handling Notes**

Luminus products are designed for robust performance in general lighting application. However, care must be taken when handling and assembling the LEDs into their fixtures. To avoid damaging Luminus COBs please follow these guidelines.

The following is an overview of the application notes detailing some of the practices to follow when working with these devices. More detailed information is available on the Luminus web site at www.luminus.com.

## **General Handling**

Devices are made to be lifted or carried with tweezers on two adjacent corners opposite the contact pads. At no time should the devices be handled by or should anything come in contact with the light emitting surface (LES) area. This area includes the yellow colored circular area and the ring surrounding it. There are electrical connections under the LES which if damaged will cause the device to fail. In addition, the ring frame itself should not be used for moving, lifting or carrying the device. Also do not attach any optics or mechanical holders to the ring as it is not capable to handle the mechanical stress.

#### **Storage Condition**

Please follow the conditions below.

Before opened	Temperature 5~30°C, relative humidity less than 60%.
After opened	Temperature $5\sim30^{\circ}$ C, relative humidity less than 60%. After opening, LED should be kept in an aluminum moisture proof bag with a moisture absorbent material
Avoid Corrosive gas	Avoid exposing to air with corrosive gas. If exposed, electrode surface would be damaged, which may affect soldering. More detailed information is available on the Luminus Applications Resources web pages.

#### **Static Electricity**

Luminus COBs are electronic devices which can be damaged by electrostatic discharge (ESD). Please use appropriate measures to assure the devices do not experience ESD during their handling and or storage. ESD protection guidelines should be used at all time when working with Luminus COBs.

Storage	Luminus products are delivered in ESD shielded bags and should be stored in these bags until used
Transporting	When transporting the devices from one assembly area to another, ESD shielded carts and carriers should be used
Assembly	Individuals handling Luminus COBs during assembly should be trained in ESD protection practices. Assemblers should maintain constant conductive contact with a path to ground by means of a wrist strap, ankle straps, mat or other ESD protection system

# Generation 6 CXM-9 Product Datasheet

## **Chemical Compatibility**

The resin material used to form the LES can getter hydrocarbons from the surrounding environment. As a result, certain chemical compounds ( $H_2SO_4$ ,  $H_2S$ ,  $SO_2$ ,  $NH_3$ ,  $H_3PO_4$ , etc.) are not recommended for use with the Luminus products. Use of these compounds can cause damage to the light output of the device and may permanently damage the device. Please refer to the table below for a list of the compounds not recommended for use with the Luminus COB products.

Common Chemicals Know to Adversely Affect Luminus Devices						
Acetates	Ethers	Potassium hydroxide				
Acetic acid	Cl, F or Br containing compounds	Siloxanes				
Acrylates	Liquid hydrocarbons	Sodium Hydroxide				
Aldehydes	Hydrochloric Acid	Sulfur compounds				
Aldehydes	Ketones	Sulfuric Acid				
Amines	Nitric Acid	Toluene				
Benzene	Phosphoric acid	Xylenes				
Dienes						

#### **Thermal Interface Material (TIM)**

Proper thermal management is critical for successful operation of any LED system. Excess operating temperature can reduce the light output of the device. Excessive heating can cause permanent damage to the device. Proper TIM material is a crucial component for effective heat transfer away from the LED during normal operation. Please refer to www.luminus.com for specific recommendations for TIM solutions.

Please refer to <a href="https://www.luminus.com/resource/application-notes">https://www.luminus.com/resource/application-notes</a> for more application note information.