

Series 804 Receptacles With PCB or Solder Cup Contacts



**Series 804 Printed
Circuit Board Receptacle**



Series 804 Receptacles feature factory-installed non-removable contacts. Connectors are backfilled with rigid epoxy for a watertight seal.

Series 804 QDC Receptacles are available in two jam nut shell styles. **Style 00** for front panel mounting; and **Style 07** for rear panel mounting.

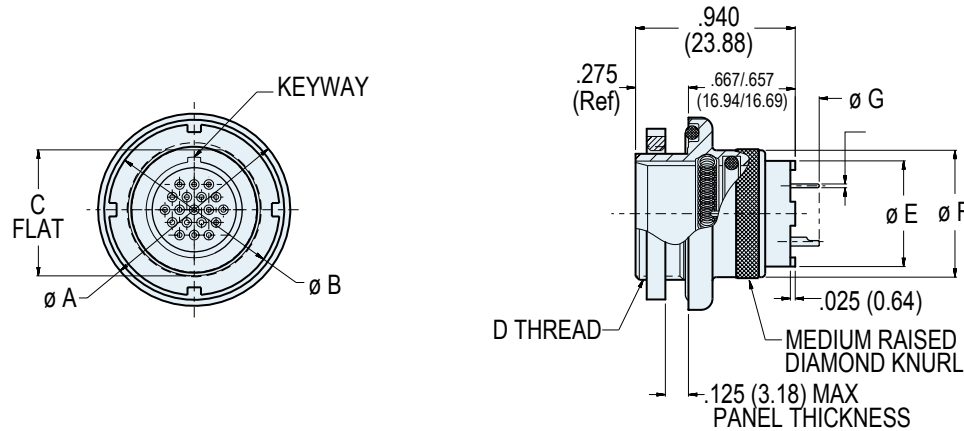
PCB Contacts feature .020" (0.5mm) diameter gold-plated tails for solder termination to rigid or flexible circuits.

Solder Cup Contacts accept up to #22 AWG stranded wire.

HOW TO ORDER SERIES 801 PRINTED CIRCUIT BOARD RECEPTACLES

Sample Part Number					
804-005	-07	NF	9-4	E	
Series	Shell Style	Shell Material / Finish	Shell Size- Insert Arrangement	Contact Type	Shell Key Position
804-005 Receptacle with Solder Cup Contacts or PC Tails	 -00 Jam Nut, Front Panel	C Aluminum / Black Anodize	5-3 3 #23	P Pin, PC Tail	Omit for Single Master Key
		M Aluminum / Electroless Nickel	6-1 1 #16		
		NF Aluminum / Cadmium with Olive Drab Chromate	6-4 4 #23		
			6-7 7 #23		
			7-1 1 #12	S Socket, PC Tail	A Pos. A (Normal)
	 -07 Jam Nut, Rear Panel	ZN Aluminum / Zinc-Nickel with Olive Drab Chromate	7-10 10 #23		
			8-13 13 #23		
		ZNU Aluminum / Zinc-Nickel with Black Chromate	9-4 4 #16	E Pin, Solder Cup	B Pos. B
			9-19 19 #23		C Pos. C
			10-26 26 #23		D Pos. D
			12-2 2 #12	F Socket, Solder Cup	
			12-37 37 #23		
			14-55 55 #23		
		Z1 Stainless Steel	15-85 85 #23		


Series 804 PCB/Solder Receptacles – Rear Panel Jam Nut



Rear Panel Jam Nut
804-005-07

DIMENSIONS												
Shell Size	Ø A		Ø B		C Flat		D Threads	Ø E		Ø F		Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
5	.790	20.07	.562	14.27	.415	10.54	.4375-32 UN-2A	.244	6.20	.450	11.43	#23 .018/.022 (0.46/0.56)
6	.830	21.08	.625	15.87	.467	14.40	.5000-32 UN-2A	.330	8.38	.520	13.21	
7	.910	23.11	.750	19.05	.594	15.09	.6250-28 UN-2A	.432	10.97	.580	14.73	
8	.955	24.26	.750	19.05	.594	15.09	.6250-28 UN-2A	.493	12.52	.603	15.32	#16 .060/.064 (1.52/1.63)
9	1.000	25.40	.812	20.62	.655	16.64	.6875-28 UN-2A	.551	14.00	.695	17.65	
10	1.085	27.48	.875	22.22	.721	18.31	.7500-28 UN-2A	.620	15.75	.735	18.67	
12	1.180	29.97	1.000	25.40	.843	21.41	.8750-28 UN-2A	.703	17.86	.880	22.35	#12 .092/.096 (2.34/2.44)
14	1.325	33.66	1.125	28.57	.968	24.59	1.0000-28 UN-2A	.863	21.92	1.010	25.65	
15	1.390	35.31	1.188	30.17	1.029	26.14	1.0625-20 UN-2A	.912	23.16	1.060	26.92	

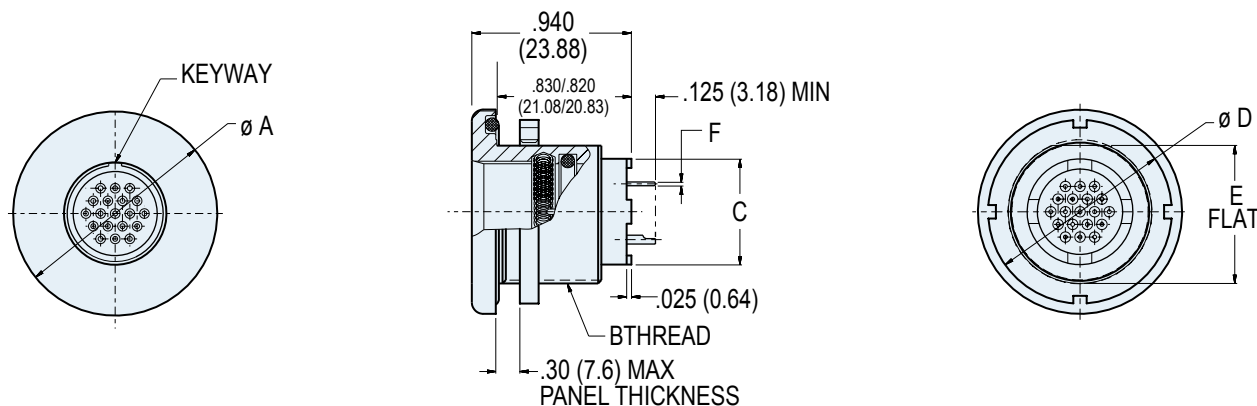
ALTERNATE KEY POSITIONS

	Pos.	A°		B°	
		In.	mm.	In.	mm.
	A	150°	210°		
	B	75°	210°		
	C	95°	230°		
	D	140°	275°		

JAM NUT PANEL CUTOUT

Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.425	10.80	.448	11.38
6	.477	12.12	.510	12.95
7	.604	15.34	.635	16.13
8	.604	15.34	.635	16.13
9	.665	16.89	.695	17.65
10	.731	18.57	.760	19.30
12	.853	21.67	.885	22.48
14	.978	24.84	1.010	25.65
15	1.039	26.39	1.070	27.18

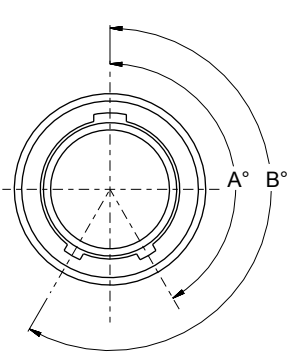
Series 804 PCB/Solder Receptacles – Front Panel Jam Nut



Front Panel Jam Nut
804-005-00

DIMENSIONS										
Shell Size	Ø A		B Threads	Ø C		Ø E		E Flat		Ø F Tail Dia.
	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.830	21.08	.5000-32 UN-2A	.244	6.20	.625	15.87	.470	11.94	#23 .018/.022 (0.46/0.56)
6	.885	22.48	.5625-28 UN-2A	.330	8.38	.688	17.47	.530	13.46	
7	.995	25.27	.6875-28 UN-2A	.432	10.97	.812	20.62	.663	16.84	
8	.995	25.27	.6875-28 UN-2A	.493	12.52	.812	20.62	.663	16.84	#16 .060/.064 (1.52/1.63)
9	1.075	27.31	.7500-28 UN-2A	.551	14.00	.875	22.22	.720	18.29	
10	1.140	28.95	.8125-28 UN-2A	.620	15.75	.938	23.82	.788	20.02	#12 .092/.096 (2.34/2.44)
12	1.340	34.04	1.0000-28 UN-2A	.703	17.86	1.125	28.57	.970	24.64	
14	1.390	35.31	1.0625-20 UN-2A	.863	21.92	1.188	30.18	1.020	25.91	
15	1.450	36.83	1.1250-28 UN-2A	.912	23.16	1.250	31.75	1.093	27.76	

ALTERNATE KEY POSITIONS

	Pos.	A° B°	
		A°	B°
	A	150°	210°
	B	75°	210°
	C	95°	230°
	D	140°	275°

JAM NUT PANEL CUTOUT

Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.480	12.19	.510	12.95
6	.540	13.72	.575	14.61
7	.674	17.12	.698	17.73
8	.674	17.12	.698	17.73
9	.730	18.54	.760	19.30
10	.799	20.29	.822	20.88
12	.980	24.89	1.010	25.65
14	1.030	26.16	1.075	27.31
15	1.013	25.73	1.135	28.83

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[804-005-07M5-3P](#) [804-005-07M5-3S](#) [804-005-07M8-13S](#) [804-005-07ZNU12-37S](#) [804-005-07ZNU8-13P](#) [804-005-00M8-13P](#) [804-005-07ZNU5-3S](#) [804-005-07ZNU8-13S](#) [804-005-00ZNU14-55P](#) [804-005-00ZNU6-1P](#) [804-005-00ZNU6-1S](#) [804-005-00ZNU8-13S](#) [804-005-00ZNU9-4S](#) [804-005-07M12-37P](#) [804-005-07M9-4P](#) [804-005-07ZNU12-2S](#) [804-005-07ZNU12-37P](#) [804-005-07ZNU14-55S](#) [804-005-07ZNU15-85S](#) [804-005-07ZNU5-3P](#) [804-005-07ZNU6-1P](#) [804-005-07ZNU6-1S](#) [804-005-07ZNU8-13F](#)