

1607202

https://www.phoenixcontact.com/us/products/1607202

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert set, Range of articles: VARIOCON, design: VC2, housing material: PA, number of positions: 18, rated voltage: 250, rated current: 10 A, Contact connection type: Socket

Your advantages

- Proven COMBICON technology
- · Universal connection
- Can be keyed to prevent incorrect connection

Commercial data

Item number	1607202
Packing unit	5 pc
Minimum order quantity	1 pc
Sales key	AB01
Product key	ABLADA
Catalog page	Page 32 (C-2-2013)
GTIN	4017918940966
Weight per piece (including packing)	35.61 g
Weight per piece (excluding packing)	35.61 g
Customs tariff number	85366990
Country of origin	PL



1607202

https://www.phoenixcontact.com/us/products/1607202

Technical data

Notes

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
 The products must be regularly inspected for damage.
 Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that the protective or functional ground has been properly connected.
- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
- Operate the connector only when it is fully plugged in.
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the



1607202

https://www.phoenixcontact.com/us/products/1607202

	standards.
	 Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Product properties	
Product type	Contact insert
Product family	VARIOCON
Series	VC-D
Туре	VC2
Number of positions	18
Connection profile	17+PE
Number of module slots	3
Data management status	
Article revision	06
ALLIGIO TOVISION	00
Insulation characteristics	
Degree of pollution	3
Electrical properties	
Rated voltage (II/2)	630 V
Rated voltage (II/2) Rated voltage (III/2)	630 V 320 V
Rated voltage (III/2)	
	320 V
Rated voltage (III/2) Rated voltage (III/3)	320 V 250 V
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD	320 V 250 V 250 V
Rated voltage (III/2) Rated voltage (III/3)	320 V 250 V 250 V 250
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3)	320 V 250 V 250 V 250 4 kV
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage	320 V 250 V 250 V 250 U 250 4 kV 4 kV
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage	320 V 250 V 250 V 250 4 kV 4 kV
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage	320 V 250 V 250 V 250 V 4 kV 4 kV 4 kV
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage	320 V 250 V 250 V 250 4 kV 4 kV 10 A 10 A
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage Rated current	320 V 250 V 250 V 250 4 kV 4 kV 10 A 10 A
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N	320 V 250 V 250 V 250 4 kV 4 kV 10 A 10 A 250 V
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage Rated current	320 V 250 V 250 V 250 4 kV 4 kV 10 A 10 A 250 V
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N	320 V 250 V 250 V 250 4 kV 4 kV 10 A 10 A 250 V
Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N	320 V 250 V 250 V 250 4 kV 4 kV 10 A 10 A 250 V

Dimensions



1607202

https://www.phoenixcontact.com/us/products/1607202

Ambient conditions

Ambient temperature (operation)

Dimensional drawing	65,2
Width	65.2 mm
Height	27.5 mm
Length	41.9 mm
terial specifications	
Color of the housing part	black
Material	Polyamide (Contact carriers)
	Polyamide (Sleeve frame)
Flammability rating according to UL 94	V0
Insulating material group	I / CTI 600
Housing material	PA
Contact material	CuZn
Contact surface material	tin-plated
Contact carrier material	PA
Material for screw connection	Stainless steel
ble/line	
Stripping length of the individual wire	7 mm
echanical properties	
Mechanical data	
Insertion/withdrawal cycles	≥ 100

-40 °C ... 100 °C




1607202


https://www.phoenixcontact.com/us/products/1607202

Drawings

Dimensional drawing

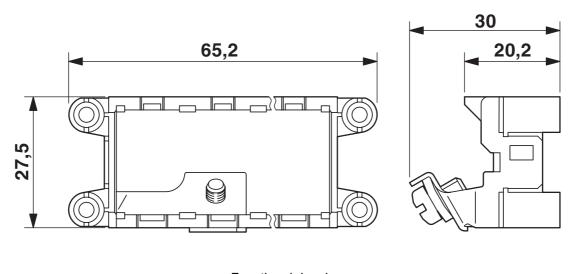

Functional drawing

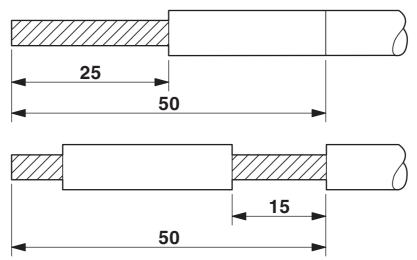



1607202

https://www.phoenixcontact.com/us/products/1607202

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223
ETIM	
ETIM 9.0	EC003557
UNSPSC	

39121400



1607202

https://www.phoenixcontact.com/us/products/1607202

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com