

303 Series

TR3, Fast-Acting Fuse



Description

The 303 Series are TR3, fast-acting type, 125V rated fuses designed in accordance to UL 248-14.

Features & Benefits

- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance
- Shock safe casing
- Vibration resistant
- RoHS compliant, Lead-Free and Halogen-Free
- Available from 0.050A to 5A

Additional Information



Resources



Accessories



Samples

Electrical Characteristics

% of Ampere Rating	Opening Time
200	60 Seconds, Maximum

Applications

- Battery chargers
- Consumer electronics
- Power supplies
- Industrial controllers

Agency Approvals

Agency	Agency File Number	Ampere Range
UL	E67006	0.050A - 5A
CSA	051378	0.050A - 5A
UKCA	NA	0.050A - 5A

Electrical Characteristics


Amp Code	Rated Current	Voltage Rating	Breaking Capacity	Nominal Cold Resistance (Ohms)	Voltage Drop 1.0xI _N max. (mV)	Power Dissipation 1.0xI _N max. (mW)	Melting Integral 10xI _N max. (A ² s)	Approvals		
								UL	UKCA	CSA
0050	50mA	125V	50A @ 125VAC 50A @ 63VDC	2.9203	800	40	0.00007	X	X	X
0063	63mA	125V		2.7400	780	50	0.00013	X	X	X
0080	80mA	125V		2.2300	730	60	0.0002	X	X	X
0100	100mA	125V		4.3800	700	70	0.0004	X	X	X
0125	125mA	125V		3.4605	650	85	0.0022	X	X	X
0160	160mA	125V		2.1687	600	100	0.0029	X	X	X
0200	200mA	125V		1.3500	550	110	0.0042	X	X	X
0250	250mA	125V		1.1500	500	125	0.0082	X	X	X
0315	315mA	125V		0.9645	450	145	0.015	X	X	X
0400	400mA	125V		0.8050	400	160	0.025	X	X	X
0500	500mA	125V		0.5320	380	190	0.042	X	X	X
0630	630mA	125V		0.1448	160	100	0.015	X	X	X
0800	800mA	125V		0.1023	155	125	0.025	X	X	X
1100	1.00A	125V		0.0830	150	155	0.039	X	X	X
1125	1.25A	125V		0.0644	145	185	0.059	X	X	X
1160	1.60A	125V		0.0520	140	225	0.11	X	X	X
1200	2.00A	125V		0.0400	130	260	0.17	X	X	X
1250	2.50A	125V		0.0307	125	315	0.23	X	X	X
1315	3.15A	125V		0.0262	120	380	0.45	X	X	X
1400	4.00A	125V		0.0178	110	440	1.0	X	X	X
1500	5.00A	125V		0.0131	105	525	1.5	X	X	X

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

303 Series


TR3, Fast-Acting Fuse

Temperature Re-rating Curve

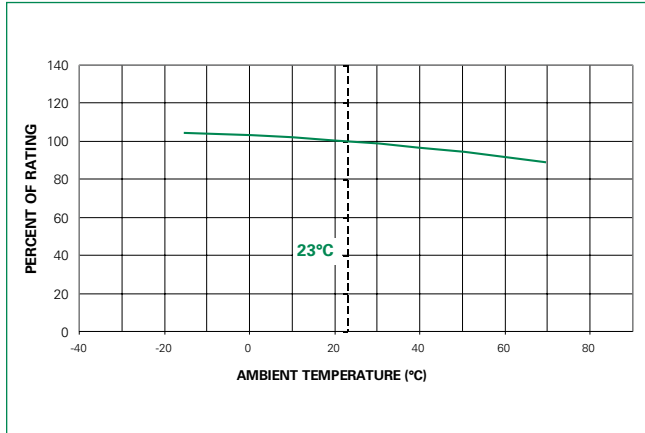


Note: Re-rating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Average Time Current Curves

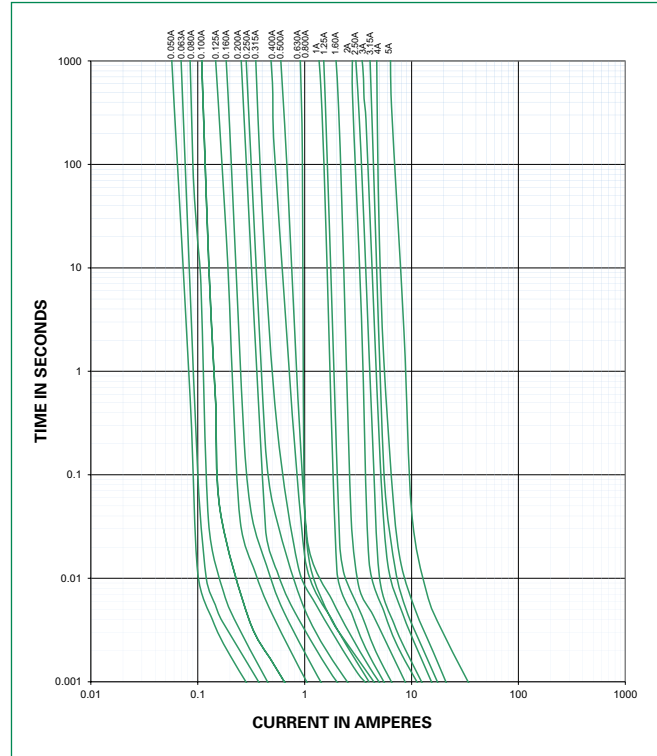

Soldering Parameters - Wave Soldering

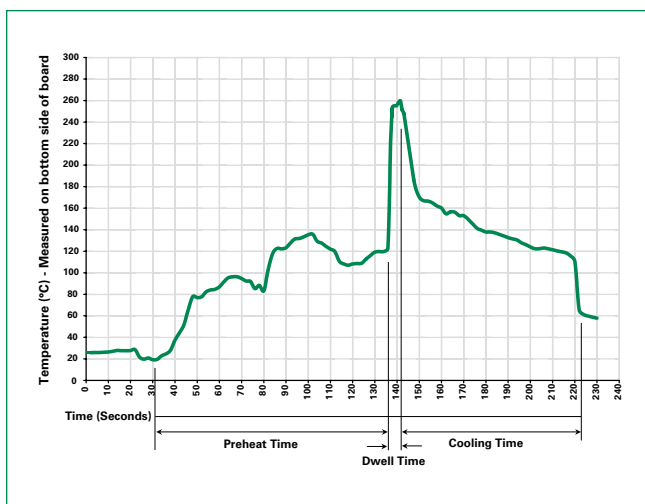

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100°C
Temperature Maximum:	150°C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260°C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C
Heating Time: 5 seconds max.

Note: These devices are not recommended for IR or Convection Reflow process.

303 Series


TR3, Fast-Acting Fuse

Product Characteristics

Materials	Base/Cap: Black Thermoplastic Base Polyamide PA 6.6, UL 94V-0 Brass, Nickel-plated Cap Round Pins: Copper alloy, Tin-plated
Lead Pull Strength	10 N (IEC 60068-2-21)
Solderability	260°C, ≤ 3s. (Wave) 350°C, ≤ 1s. (Soldering Iron)
Soldering Heat Resistance	260°C, 10s. (IEC 60068-2-20) 350°C, 3s. (Soldering Iron)

Operating Temperature	-25°C to +70°C (consider de-rating)
Climatic Category	-25°C/+70°C/21 days (IEC 60068-1-3)
Stock Conditions	+10°C to +60°C RH, ≤75% yearly average, without dew 24 cycles at 15 min. each (IEC 60068-6)
Vibration Resistance	10 - 60 Hz at 0.75 mm amplitude 60 - 2000 Hz at 10 g acceleration

Dimensions

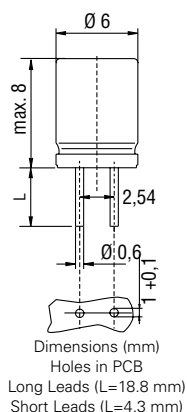

Part Numbering System

	303	xxxx	0001
Series			
Amp. Code			
	Refer to Amp Code column of Electrical Characteristic Table		
Packaging Code			
	0001 Tape/Ammopack (1,500 pcs.) 0131 Long Leads - Bulk (200 pcs.) 0421 Short Leads - Bulk (300 pcs.)		

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Reel Size
303 Series				
Tape & Ammopack	N/A	1,500	0001	N/A
Long Leads	N/A	200	0131	N/A
Short Leads	N/A	300	0421	N/A

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

30300630001	30300630421	30311250421	30301250421	30312500131	30300500131	30302500131	
30311250001	30301250001	30300500421	30302500421	30312500421	30300500001	30302500001	30312500001
30311250131	30301250131	30308000001	30308000421	30308000131	30311600001	30301600001	
30311600421	30301600421	30301600131	30311600131	30300630131	30303150131	30313150131	30300800131
30304000131	30302000131	30301000131	30305000131	30312000131	30314000131	30311000131	
30315000131	30306300131	30312000421	30314000421	30311000421	30315000421	30304000421	30302000421
30301000421	30305000421	30306300421	30312000001	30314000001	30315000001	30311000001	
30304000001	30302000001	30305000001	30301000001	30306300001	30303150001	30313150001	30300800421
30300800001	30303150421	30313150421					