

SMT Power Inductors

High Current Molded Power Inductor - PA4345.XXXANLT Series



-  **Height:** 2.0mm Max
-  **Footprint:** 6.0mm x 5.4mm Max
-  **Current Rating:** up to 22A
-  **Inductance Range:** 0.15uH to 22uH
-  Shielded construction and compact design
-  High current, low DCR, and high efficiency
-  Minimized acoustic noise and minimized leakage flux

Electrical Specifications @ 25°C - Operating Temperature -55°C to +155°C

Part Number ⁶	Inductance ⁵ 100KHz, 1V uH±20%	Rated Current A	DC Resistance		Saturation Current A
			TYP.	MAX.	
			mΩ	mΩ	
PA4345.151ANLT	0.15*	22	2.8	3.2	27
PA4345.221ANLT	0.22	16	3.8	4.4	20
PA4345.331ANLT	0.33	14	5.2	6	11
PA4345.471ANLT	0.47	13	6.1	7.2	9
PA4345.681ANLT	0.68	12	8	9.2	8
PA4345.102ANLT	1.0	8.6	14	16.2	7.5
PA4345.152ANLT	1.5	7.5	22	26.4	7
PA4345.222ANLT	2.2	6.5	29	34	5.8
PA4345.332ANLT	3.3	6	50	60	5
PA4345.472ANLT	4.7	4	84	97	4.7
PA4345.562ANLT	5.6	3.5	91	109	4.4
PA4345.682ANLT	6.8	3.1	110	127	4.2
PA4345.822ANLT	8.2	2.9	123	142	3.9
PA4345.103ANLT	10.0	2.7	150	180	3.5
PA4345.153ANLT	15.0	2.2	224	252	2.6
PA4345.223ANLT	22.0	1.9	290	325	2.2

Notes:


- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40 °C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 155 °C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Inductance tolerance is ±20% for all parts except PA4345.151ANLT which is ±30%.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution and lead times may be longer. Please contact Pulse for availability.

SMT Power Inductors



High Current Molded Power Inductor - PA4345.XXXANLT Series

Mechanical

PA4345.XXXANLT

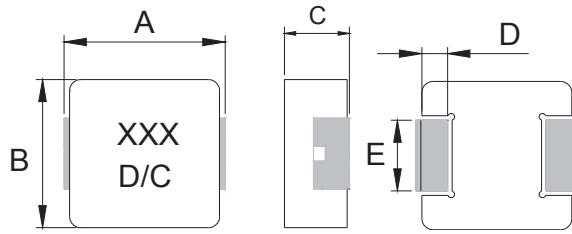

Final Layout




SUGGESTED PAD LAYOUT

Series	A	B	C	D	E	L	G	H
PA4345.XXXANLT	5.7±0.3	5.2±0.2	1.8±0.2	1.0±0.3	2.5±0.3	6.0	2.8	2.5

All Dimensions in mm.

TAPE & REEL INFO

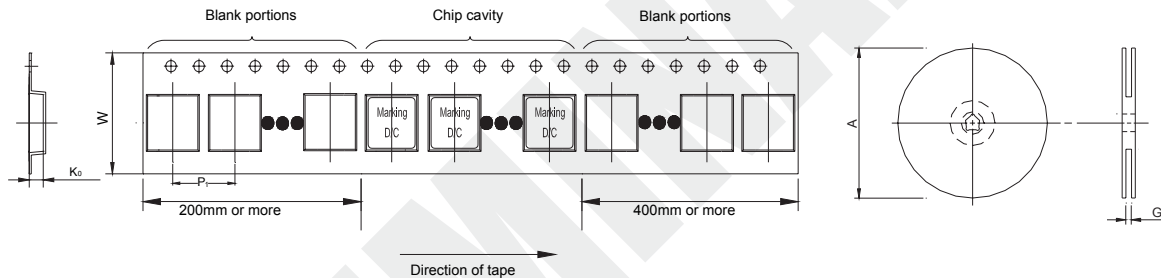

SURFACE MOUNTING TYPE, REEL/TAPE LIST						
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	PCS/REEL
PA4345.XXXANLT	Ø330	12.4+2/-0	8.0±0.1	12.0±0.3	2.3±0.1	3000

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (Shenzhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PA4345.331ANLT](#) [PA4345.102ANLT](#) [PA4345.103ANLT](#) [PA4345.151ANLT](#) [PA4345.152ANLT](#) [PA4345.681ANLT](#)
[PA4345.682ANLT](#) [PA4345.822ANLT](#) [PA4345.332ANLT](#) [PA4345.471ANLT](#) [PA4345.562ANLT](#) [PA4345.153ANLT](#)
[PA4345.221ANLT](#) [PA4345.222ANLT](#) [PA4345.223ANLT](#)