


Technical Data Sheet		Rosenberger												
EBC	Adaptor	EBCS102-S14N1												
 46.4 1.57 2.7 4.45 3 notches Circumferentially with the same distance between the notches														
All dimensions are in mm; tolerances acc. to ISO 2768 m-H Interface According to Rosenberger EBC™ Documents Application note EBC Material and plating <table> <tr> <td>Connector parts</td><td>Material</td><td>Plating</td></tr> <tr> <td>Center contact</td><td>Cu</td><td>Silver $\geq 1,5 \mu\text{m}$</td></tr> <tr> <td>Outer contact</td><td>Brass</td><td>Flash white bronze over silver(e.g. Optargen®)</td></tr> <tr> <td>Dielectric</td><td>PTFE</td><td></td></tr> </table>			Connector parts	Material	Plating	Center contact	Cu	Silver $\geq 1,5 \mu\text{m}$	Outer contact	Brass	Flash white bronze over silver(e.g. Optargen®)	Dielectric	PTFE	
Connector parts	Material	Plating												
Center contact	Cu	Silver $\geq 1,5 \mu\text{m}$												
Outer contact	Brass	Flash white bronze over silver(e.g. Optargen®)												
Dielectric	PTFE													
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de												
		Page 1 / 2												

Technical Data Sheet				Rosenberger			
EBC		Adaptor		EBCS102-S14N1			
Electrical data Impedance50 Ω FrequencyDC to 10 GHz Return loss≥ 26 dB @ DC to 6 GHz* Insertion loss≤ 0.05 x √f [GHz] dB Insulation resistance≥ 5 GΩ Center contact resistance≤ 10 mΩ Outer contact resistance≤ 5 mΩ Test voltage (at sea level)500 V rms Working voltage (at sea level)335 V rms Power handling (sea level, VSWR 1.0)100 W @ 2.2 GHz @ 25°C Contact Current≤ 2A DC Screening attenuation – Interface only≥ 50 dB up to 4 GHz ≥ 40 dB @ 4 GHz to 6 GHz Crosstalk – Next / Fext≤ -70 dB @ DC to 4 GHz – B2B distance 16.8mm ≤ -60 dB @ 4 GHz to 6 GHz – B2B distance 16.8mm Intermodulation (3rd order)≥ 160 dBc (2 x 43 dBm) - Connector only, VSWR in application depends decisive on PCB layout – * Dependent on axial misalignment							
Mechanical data Mating cycles≥ 100 Center contact captivation≥ 5 N Engagement force EBC LD13 N < F < 35 N Engagement force EBC SB4 N < F < 12 N Disengagement force EBC LD3 N < F < 9 N Disengagement force EBC SB1 N < F < 2.5 N Working range1.6 mm (± 0.8 mm) Radial misalignment± 0.7 mm / max. 4° Min. B2B-distance12 mm							
Environmental data Temperature range-55 °C to +105 °C Thermal shockMIL-STD-202, Method 107, Condition B Climatic categoryIEC 61169-1, Sub-clause 9.4.5 Moisture resistanceMIL-STD-202, Method 106 VibrationMIL-STD-202, Method 204, Condition B ShockMIL-STD-202, Method 213, Condition A RoHScompliant							
Weight Weight1.62g/pc							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary. For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
L. Bombik	23.04.20	B. Aicher	20.02.24	c00	24-0066	S. Schier	20.02.24
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2

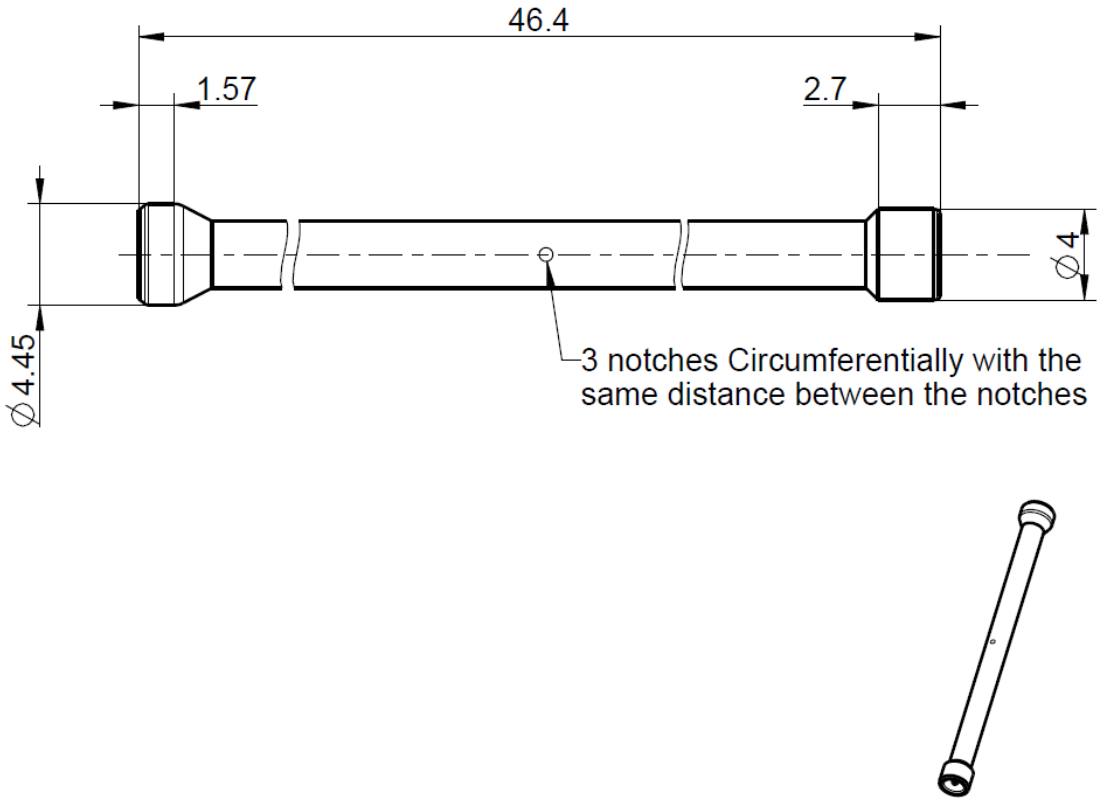

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[EBCS102-S14N1](#)