

KA278RA05


Low Dropout Voltage Regulator (Fixed & Adjustable)

Features


- Nominal 5V output without adjusting
- Output Adjustable Between 1.25V and 32V
- 2A Output low dropout voltage regulator
- TO220 Full-Mold package (4PIN)
- Overcurrent protection, Thermal shutdown
- Overvoltage protection, Short-Circuit protection

Description

The KA278RA05 is a low-dropout voltage regulator suitable for various electronic equipments. It provides constant voltage power source with TO-220F-4 lead full mold package. Dropout voltage of KA278RA05 is below 0.5V in full rated current(2A). This regulator has various function such as peak current protection, thermal shut down and over voltage protection.

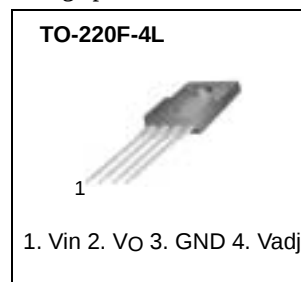

Internal Block Diagram

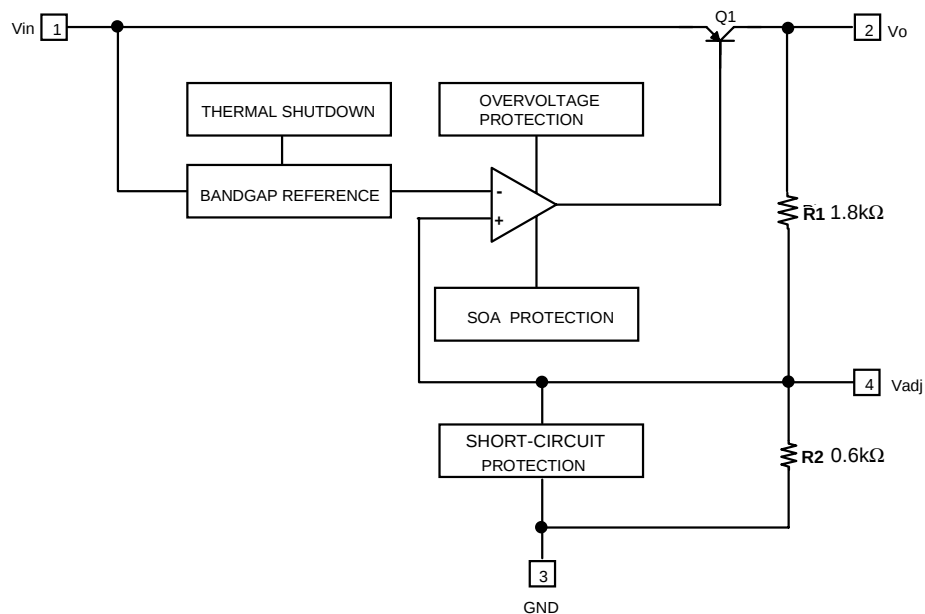

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Remark
Input Voltage	V _{in}	35	V	-
Output Current	I _O	2.0	A	-
Power Dissipation 1	Pd1	1.5	W	No Heatsink
Power Dissipation 2	Pd2	15	W	With Heatsink
Junction Temperature	T _j	150	°C	-
Operating Temperature	T _{opr}	-20 ~ 80	°C	-

Electrical Characteristics

(V_{in} = 7V, I_O = 1.0A, T_a = 25 °C, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V _O	-	4.88	5	5.12	V
Load Regulation	R _{load}	5mA < I _O < 2A	-	0.1	2.0	%
Line Regulation	R _{line}	6V < V _{in} < 12V	-	0.5	2.5	%
Ripple Rejection Ratio	RR	note1	45	55	-	dB
Dropout Voltage	V _{drop}	I _O = 2A	-	-	0.5	V
Quiescent Current	I _q	I _O = 0A	-	-	10	mA
Reference Voltage	V _{ref}	-	1.24	1.27	1.30	V

Note:

1. These parameters, although guaranteed, are not 100% tested in production.

Typical Performance Characteristics

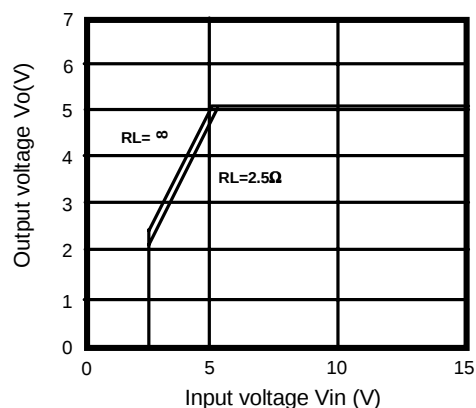


Figure 1. Output Voltage vs. Input Voltage

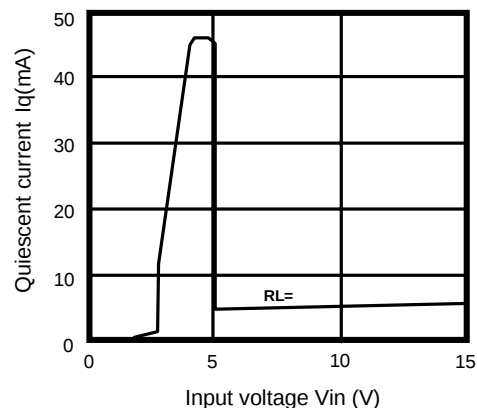


Figure 2. Quiescent Current vs. Input Voltage

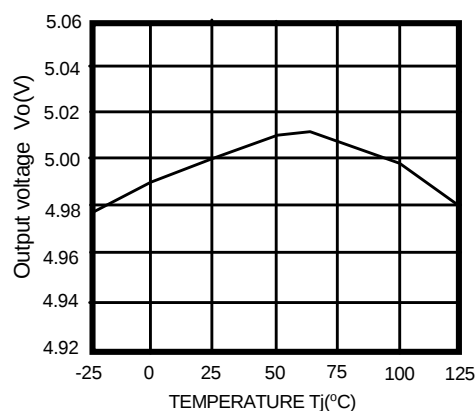


Figure 3. Output Voltage vs. Temperature(T_j)
*Fixed Mode ($V_O=5V$)

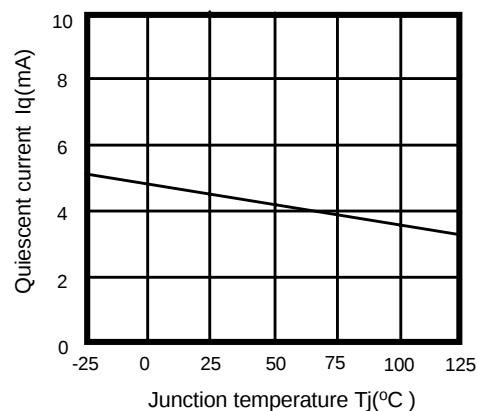


Figure 4. Quiescent Current vs. Temperature(T_j)

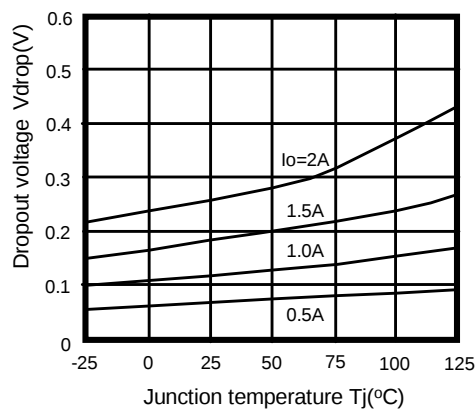


Figure 5. Dropout Voltage vs. Junction Temperature

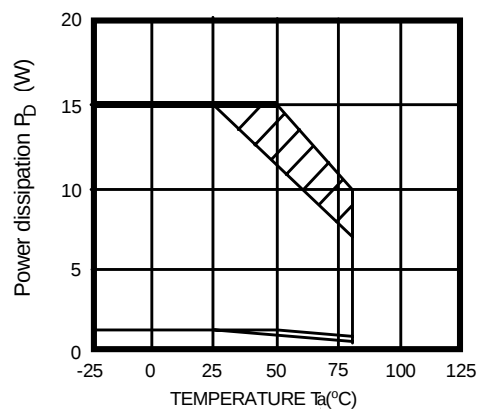


Figure 6. Power Dissipation vs. Temperature(T_a)

Typical Performance Characteristics


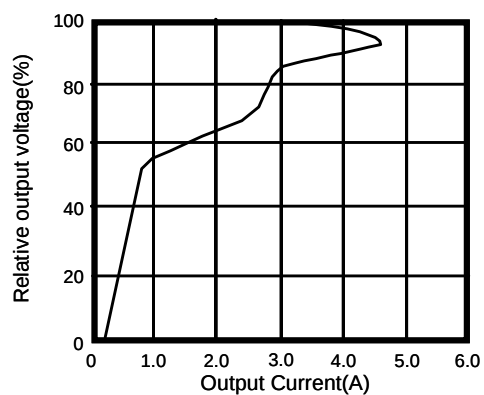


Figure 7. Overcurrent Protection Characteristics
(Typical Value)

Typical Application

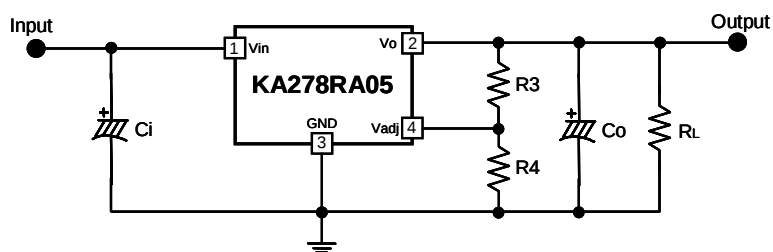

$$V_o = 1.25 \left(1 + \frac{R_1/R_3}{R_2/R_4} \right) \quad R_1 = 1.8k\Omega, R_2 = 0.6k\Omega$$

Figure 7. Application Circuit (Adjustable Mode)

- Ci is required if regulator is located an appreciable distance from power supply filter.
- Co improves stability and transient response. ($C_O > 47\mu F$)

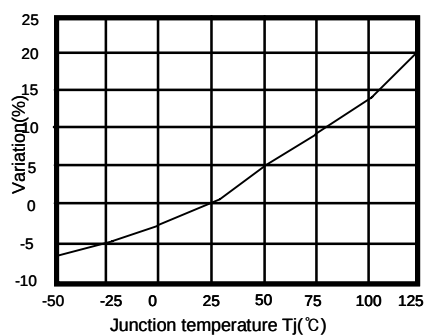


Figure 8. Internal Resistor(R_1, R_2) Variation vs. Temperature(T_j)

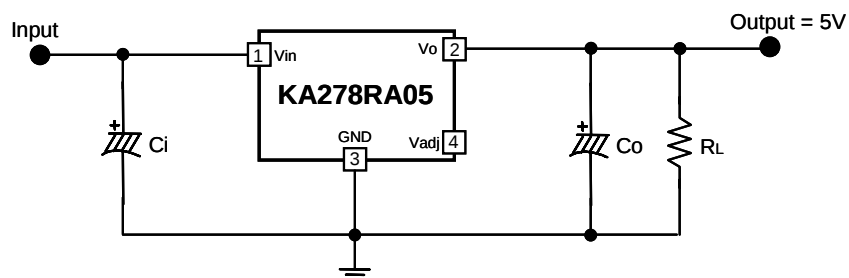


Figure 9. Application Circuit (Fixed Mode)

Ordering Information

Product Number	Package	Operating Temperature
KA278RA05	TO-220F-4L	-20°C to + 80°C

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor

SEARCH | [Parametric](#) | [Cross Reference](#)

space

Product Folders and

Applica

find products

[Home](#) >> [Find products](#) >>

[Products groups](#)

[Analog and Mixed
Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and
parametric search](#)

[Cross-reference
search](#)

technical information

buy products

technical support

my Fairchild

company

KA278RA05
2A Adjustable/Fixed 5V Low Dropout Voltage
Regulator (LDO)

Contents
[General description](#) | [Features](#) | [Product
status/pricing/package](#)

General description

The KA278RA05 is a low-dropout voltage
regulator suitable for various electronic
equipments. It provides constant voltage power
source with TO-220F-4 lead full mold
package.

Dropout voltage of KA278RA05 is below 0.5V
in full rated current(2A).

This regulator has various function such as
peak current protection, thermal shut down and
over voltage protection.

[back to top](#)

Features

- Nominal 5V output without adjusting
- Output Adjustable Between 1.25V and 32V
- 2A Output low dropout voltage regulator
- TO-220 Full-Mold package (4 pin)
- Overcurrent protection, Thermal shutdown
- Overvoltage protection, Shortcircuit protection

[back to top](#)

Product status/pricing/package

Datasheet
[Download this
datasheet](#)

PDF

[e-mail this datasheet](#)

[E-

This page[Print version](#)

Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices
\(PCNs\)](#)

[Support](#)

[Distributor and field sales
representatives](#)

[Quality and reliability](#)

[Design tools](#)

Product	Product status	Package type	Leads	Packing method
KA278RA05TU	Full Production	TO-220F	4	RAIL

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© [Copyright 2002 Fairchild Semiconductor](#)