

March 1993

Features

- 128 Analog Switches
- Low R_{ON}
- Guaranteed R_{ON} Matching
- Analog Signal Input Voltage Equal to the Supply Voltage
- Wide Operating Voltage: 4V to 15V
- Parallel Input Addressing
- High Latch Up Current: 50mA Minimum
- Very Low Crosstalk
- Pin And Functionally Compatible with the Following Types: SGS M3494 and Mitel MT8816

Applications

- PBX Systems
- Instrumentation
- Analog And Digital Multiplexers
- Video Switching Networks

Description




The Harris CD22M3494 is an array of 128 analog switches capable of handling signals from DC to video. Because of the switch structure, input signals may swing through the total supply voltage range, V_{DD} to V_{EE} . Each of the 128 switches may be addressed via the ADDRESS input to the 7 to 128 line decoder. The state of the addressed switch is established by the signal to the DATA input. A low or zero input will open the switch, while a high logic level or a one will result in closure of the addressed switch when the STROBE input goes high from its normally low state. Any number or combination of connections may be active at one time. Each connection, however, must be made or broken individually in the manner previously described. All switches may be reset by taking the RESET input from a zero state to a one state and then returning it to its normal low state.


CS allows crosspoint array to be cascaded for matrix expansion.

Ordering Information

PART NUMBER	TEMPERATURE RANGE	PACKAGE
CD22M3494E	-40°C to +85°C	40 Lead Plastic DIP
CD22M3494MQ	-40°C to +85°C	44 Lead PLCC (Mitel Lead Compatible)
CD22M3494SQ	-40°C to +85°C	44 Lead PLCC (SGS Lead Compatible)

Pinouts

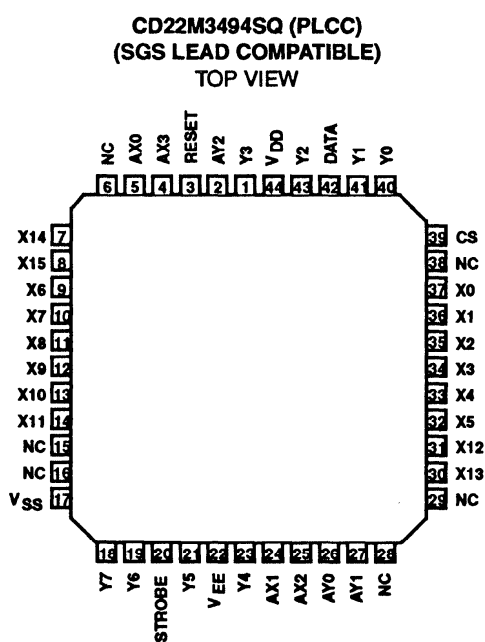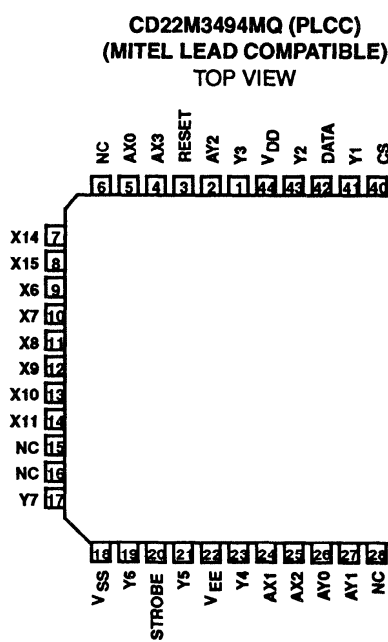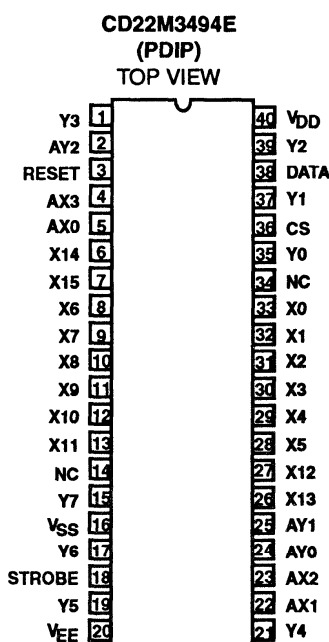

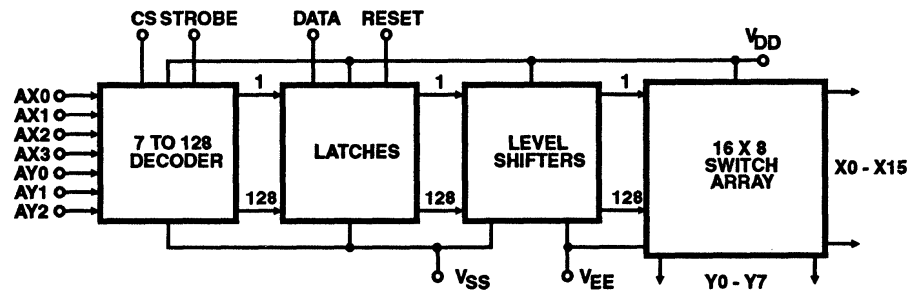Block Diagram**Pin Descriptions**

SYMBOL	40 LEAD PLASTIC DIP	44 LEAD PLCC		DESCRIPTION
		MQ	SQ	
POWER SUPPLIES				
V _{DD}	40	44	44	Positive Supply
V _{SS}	16	18	17	Negative Supply (Digital)
V _{EE}	20	22	22	Negative Supply (Analog)
ADDRESS				
AX0 - AX3	5, 22, 23, & 4	5, 24, 25, & 4		X Address Lines. These pins select one of the 16 rows of switches. See the Truth Table for the valid addresses.
AY0 - AY2	24, 25, & 2	26, 27,& 2		Y Address Lines. These pins select one of the 8 columns of switches. See the Truth Table for the valid addresses.
CONTROL				
DATA	38	42		DATA Input determines the state of the addressed switch. A high or one will close the switch. A low or zero will open the switch.
STROBE	18	20		STROBE Input enables the action defined by the DATA and ADDRESS Inputs. A low or zero results in no action. The ADDRESS Input must be stable before the STROBE Input goes to the active high level. The DATA Input must be stable on the falling edge of the STROBE.
RESET	3	3		MASTER RESET. A high or one on this line opens all switches.
CS	36	40	39	CHIP SELECT. Device is selected when CS is at a high level, allows the crosspoint array to be cascaded for matrix expansion.
INPUTS/OUTPUTS				
X0 - X5 X6 - X11 X12 - X15	33 - 28 8 - 13 27, 26, 6, 7	37 - 32 9 - 14 31, 30, 7, 8		Analog or Digital Inputs/Outputs. These pins are the rows X0 - X15.
Y0 - Y7 I/O	35, 37, 39, 1, 21, 19, 17 & 15	40, 41, 43, 1, 23, 21, 19 & 18		Analog or Digital Inputs/Outputs. These pins are the columns Y0 - Y7.

Specifications CD22M3494

Absolute Maximum Ratings

DC Supply Voltage (V_{DD}):
(Voltages Referenced to V_{EE}) -0.5 to +16V
DC Supply Voltage (V_{DD}):
(Voltages Referenced to V_{SS}) -0.5, +16V
DC Input Diode Current, I_{IN} ± 20 mA
(For V_I , Digital $< V_{SS} - 0.5$ V or V_I , Analog $< V_{EE} - 0.5$ V or $V_I > V_{DD} + 0.5$ V)
DC Output Diode Current, I_{OK} ± 20 mA
(For V_O , Digital $< V_{SS} - 0.5$ V or V_O , Analog $< V_{EE} - 0.5$ V
or $V_O > V_{DD} + 0.5$ V)
DC Transmission Gate Current ± 25 mA
Power Dissipation Per Package (P_o):
For $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ 500mW
(Package Type E, 40 Pin Plastic DIP)
For $T_A = +60^\circ\text{C}$ to $+85^\circ\text{C}$ Derate Linearly 12mW/ $^\circ\text{C}$ to 200mW

For $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ 600mW
(Package Type Q, 44 Lead PLCC)
Operating Temperature Range (T_A):
Package Type E and Q -40°C to $+85^\circ\text{C}$
Storage Temperature Range (T_{STG}) -65°C to $+150^\circ\text{C}$
Lead Temperature (Soldering 10 Sec.) $+300^\circ\text{C}$

Recommended Operating Conditions

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

PARAMETERS	LIMITS		UNITS
	MIN	MAX	
Supply Voltage Range (For T_A = Full Package Temperature Range) $V_{SS} = 0$ V, $V_{EE} = 0$ V, V_{DD}	4	15	V
DC Input or Output Voltage V_I or V_O Digital Input Voltage	V_{EE} V_{SS}	V_{DD} V_{DD}	V V

Static Electrical Specifications ($T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$) $V_{DD} = 5$ V, $V_{SS} = 0$ V, $V_{EE} = 0$ V, Unless Otherwise Specified

PARAMETERS	SYMBOL	CONTROLS CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current	I_{DD}	$V_{DD} = 5$ V Logic Inputs = V_{DD}	-	-	2	mA
		$V_{DD} = 15$ V Logic Inputs = V_{DD}	-	-	5	mA
High-Level Input Voltage	V_{IH}		2.4	-	-	V
Low-Level Input Voltage	V_{IL}		-	-	0.8	V
Input Leakage Current, Digital	I_{IN}	Reset = Low (Note 1)	-	-	± 10 (Note 2)	μA

Static Electrical Specifications ($T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$) $V_{DD} = 12$ V, $V_{SS} = 0$ V, $V_{EE} = 0$ V, Unless Otherwise Specified

PARAMETERS	SYMBOL	CROSSPOINTS CONDITIONS	MIN	TYP	MAX	UNITS
ON Resistance	R_{ON}	$V_{SS} = V_{EE} = 0$ V $V_{DD} = 10$ V $T_A = +25^\circ\text{C}$, $V_{IN} = V_{DD}/2$ $V_X - V_Y = 0.2$ V $V_{DD} = 12$ V	-	40	75	Ω
			-	36	65	Ω
ON Resistance	R_{ON}	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ $V_{DD} = 10$ V $V_{IN} = V_{DD}/2$ $V_X - V_Y = 0.2$ V $V_{DD} = 12$ V $V_{SS} = V_{EE} = 0$ V	-	50	75	Ω
			-	45	65	Ω
Difference in ON Resistance between any two switches	ΔR_{ON}	$T_A = +25^\circ\text{C}$ $V_{IN} = V_{DD}/2$ $V_X - V_Y = 0.2$ V $V_{DD} = 12$ V $V_{SS} = V_{EE} = 0$ V	-	6	10	Ω

Specifications CD22M3494

Static Electrical Specifications ($T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$) $V_{DD} = 12\text{V}$, $V_{SS} = 0\text{V}$, $V_{EE} = 0\text{V}$, Unless Otherwise Specified (Continued)

PARAMETERS	SYMBOL	CROSSPOINTS CONDITIONS	MIN	TYP	MAX	UNITS
Difference in ON Resistance between any two switches	ΔR_{ON}	$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ $V_{IN} = V_{DD}/2$ $V_X - V_Y = 0.2\text{V}$ $V_{DD} = 12\text{V}$ $V_{SS} = V_{EE} = 0\text{V}$	-	-	10	Ω
OFF-State Leakage Current	I_L	$ V_X - V_Y = 12\text{V}$	-	-	± 10 (Note 2)	μA

NOTE:

1. Reset $I_{IH} < 20\mu\text{A}$, Reset = V_{IH}
2. At $+25^{\circ}\text{C}$ Limit is $\pm 100\text{nA}$

Dynamic Electrical Specifications ($T_A = +25^{\circ}\text{C}$), $V_{SS} = 0\text{V}$, $V_{EE} = 0\text{V}$, $V_{DD} = 14\text{V}$, $C_L = 50\text{pF}$, Unless Otherwise Specified

PARAMETERS	CROSSPOINTS CONDITIONS	MIN	TYP	MAX	UNITS
Switch I/O Capacitance	$V_{IN} = V_{DD}/2$, $f = 1\text{MHz}$	-	-	20	pF
Switch Feedthrough Capacitance	$V_{IN} = V_{DD}/2$, $f = 1\text{MHz}$	-	0.3	-	pF
Propagation Delay Time (switch ON) Signal Input to Output, t_{PHL} or t_{PLH}		-	30	100	ns
Frequency Response Channel ON $f = 20\log(V_X/V_Y) = -3\text{dB}$	$C_L = 3\text{pF}$, $R_L = 75\Omega$, $V_{IN} = 2V_{P-P}$	-	50	-	MHz
Total Harmonic, T_{HD}	$V_{IN} = 2V_{P-P}$, $f = 1\text{kHz}$	-	0.01	-	%
Feedthrough Channel OFF Feedthrough = $20\log(V_X/V_Y) = F_{DT}$	$V_{IN} = 2V_{P-P}$, $f = 1\text{kHz}$	-	-95	-	dB
Frequency for Signal Crosstalk, f_{CT}	40dB, $V_{IN} = 2V_{P-P}$, $R_L = 75\Omega$	-	10	-	MHz
Attenuation of:	110dB, $V_{IN} = 2V_{P-P}$, $R_L = 1\text{k}\Omega \parallel 10\text{pF}$	-	5	-	kHz
Control Crosstalk DATA-Input, ADDRESS, or STROBE to Output	Control Input = $3V_{P-P}$ Square Wave, $t_R = t_F = 10\text{ns}$ $R_{IN} = 1\text{K}$, $R_{OUT} = 10\text{k}\Omega \parallel 10\text{pF}$	-	75	-	mV_{PK}

Dynamic Electrical Specifications

($T_A = +25^{\circ}\text{C}$), $V_{SS} = 0\text{V}$, $V_{EE} = 0\text{V}$, $V_{DD} = 14\text{V}$, $R_L = 1\text{k}\Omega \parallel 50\text{pF}$, Unless Otherwise Specified

PARAMETERS	SYMBOL	CONTROLS CONDITIONS	MIN	TYP	MAX	UNITS
Digital Input Capacitance	C_{IN}	$V_{IN} = 5\text{V}$, $f = 1\text{MHz}$	-	5	-	pF
Propagation Delay Time STROBE to Output (Switch turn-ON)	t_{PSN}		-	50	100	ns
(Switch turn-OFF)	t_{PSF}		-	50	100	ns
DATA-in to Output (Turn-ON to high level)	t_{PZH}		-	60	100	ns
(Turn-ON to low level)	t_{PZL}		-	70	100	ns
ADDRESS to Output (Turn-ON to high level)	t_{PAN}		-	70	-	ns
(Turn-OFF to low level)	t_{PAF}		-	70	-	ns


Specifications CD22M3494

Dynamic Electrical Specifications

($T_A = +25^\circ\text{C}$), $V_{SS} = 0\text{V}$, $V_{EE} = 0\text{V}$, $V_{DD} = 14\text{V}$, $R_L = 1\text{k}\Omega$ || 50pF , Unless Otherwise Specified (Continued)

PARAMETERS	SYMBOL	CONTROLS CONDITIONS	MIN	TYP	MAX	UNITS
Set-up Time						
CS to STROBE	t_{CS}		10	-	-	ns
DATA-in to STROBE	t_{DS}		10	-	-	ns
ADDRESS to STROBE	t_{AS}		10	-	-	ns
Hold Time						
STROBE to CS	t_{CH}		10	-	-	
ADDRESS to CS			10	-	-	
STROBE to DATA-in	t_{DH}		20	-	-	ns
STROBE to ADDRESS	t_{AH}		10	-	-	ns
DATA-in to CS				20	-	-
Pulse Width						
STROBE	t_{SPW}		20	-	-	ns
RESET	t_{RPW}		20	-	-	ns
RESET Turn OFF to Output Delay	t_{PHZ}		-	70	100	ns

Timing Diagram

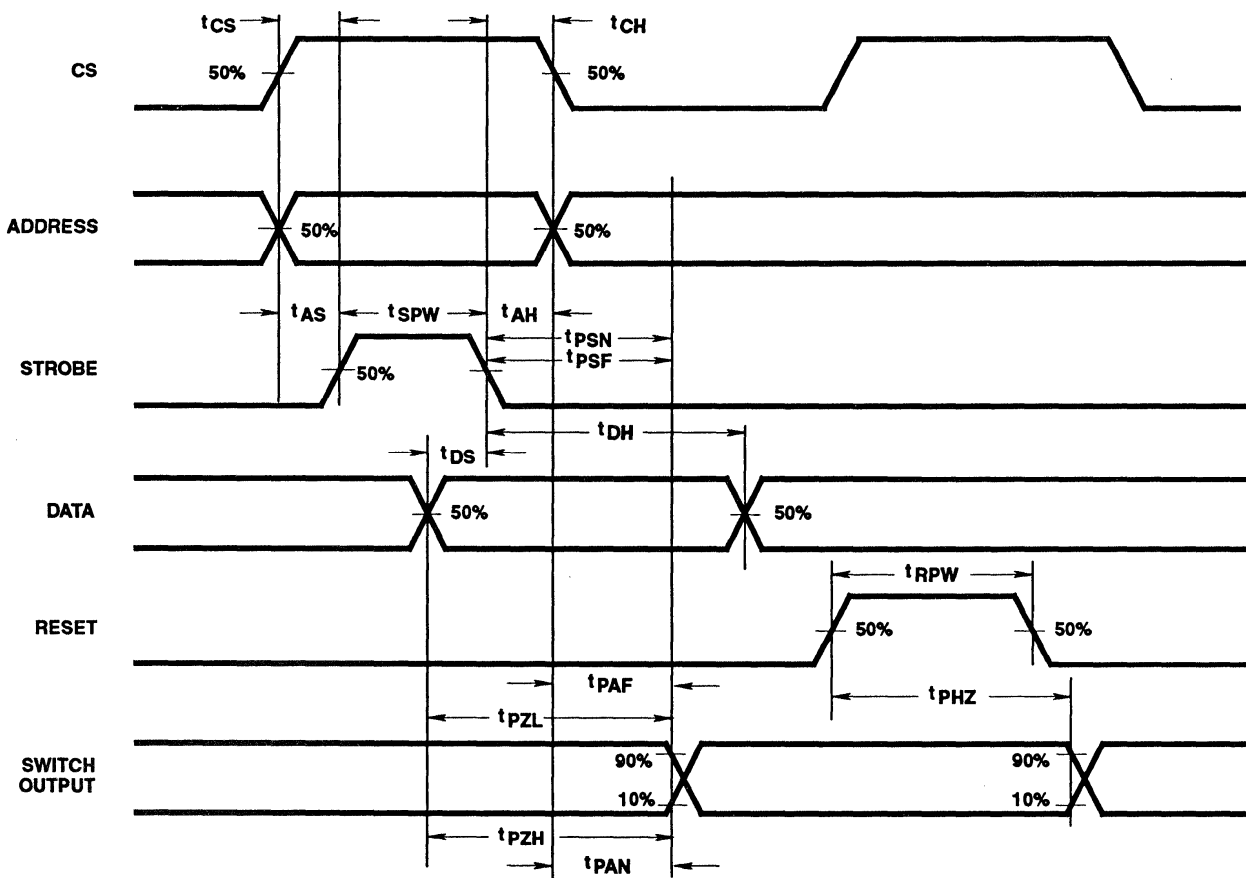

CD22M3494

TRUTH TABLE X AXIS

X ADDRESS				X SWITCH
AX3	AX2	AX1	AX0	
0	0	0	0	X0
0	0	0	1	X1
0	0	1	0	X2
0	0	1	1	X3
0	1	0	0	X4
0	1	0	1	X5
0	1	1	0	X12
0	1	1	1	X13
1	0	0	0	X6
1	0	0	1	X7
1	0	1	0	X8
1	0	1	1	X9
1	1	0	0	X10
1	1	0	1	X11
1	1	1	0	X14
1	1	1	1	X15

TRUTH TABLE Y AXIS

Y ADDRESS			
AY2	AY1	AY0	Y SWITCH
0	0	0	Y0
0	0	1	Y1
0	1	0	Y2
0	1	1	Y3
1	0	0	Y4
1	0	1	Y5
1	1	0	Y6
1	1	1	Y7

To make a connection (close switch) between any two points, specify an "X" address, a "Y" address, set "Data" high, and switch "Strobe" from low to high. To break a connection, follow this same procedure with "Data" low.

Example:

To connect switch X3 to switch Y4:

To connect switch X6 to switch Y7:

To break connection from X3 to Y4:

DATA	X ADDRESS				Y ADDRESS		
	AX3	AX2	AX1	AX0	AY2	AY1	AY0
1	0	0	1	1	1	0	0
1	1	0	0	0	1	1	1
0	0	0	1	1	1	0	0

Voltage and Resistance

