


SMA Receptacles MIL-C-83517 — Surface Launch

MIL-C-83517/6

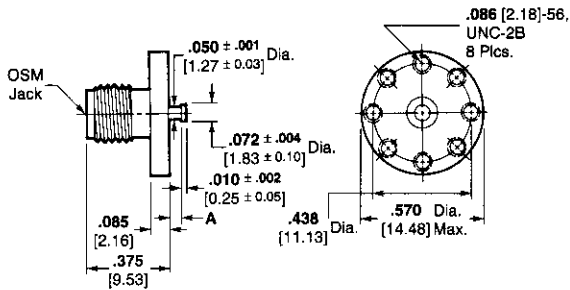


Outline 1

Military Part No.	AMP Part No.	M/A-COM ¹ Part No. (Ref. Only)	Outline	Dimension A
-31001	1053423-1	2066-8001-92	1	.060 ± .003 1.52 ± 0.08
-31002	1053425-1	2066-8002-92	1	.120 ± .003 3.05 ± 0.08
-32001	1053422-1	2066-8001-90	1	.060 ± .003 1.52 ± 0.08
-32002	1053424-1	2066-8002-90	1	.120 ± .003 3.05 ± 0.08

¹ -92 indicates passivated stainless steel finish.
-90 indicates gold plated finish.

MIL-C-83517/7

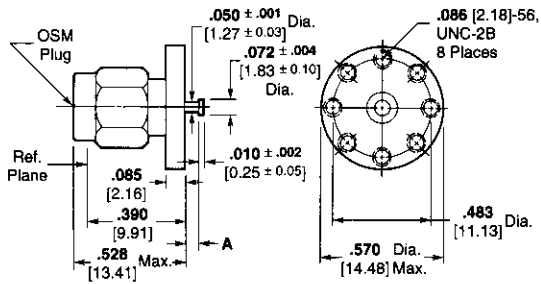


Outline 2

Military Part No.	AMP Part No.	M/A-COM ¹ Part No. (Ref. Only)	Outline	Dimension A
-31001	1053429-1	2067-8001-92	2	.060 ± .003 1.52 ± 0.08
-31002	1053431-1	2067-8002-92	2	.120 ± .003 3.05 ± 0.08
-32001	1053428-1	2067-8001-90	2	.060 ± .003 1.52 ± 0.08
-32002	1053430-1	2067-8002-90	2	.120 ± .003 3.05 ± 0.08

¹ -92 indicates passivated stainless steel finish.
-90 indicates gold plated finish.

MIL-C-83517/8

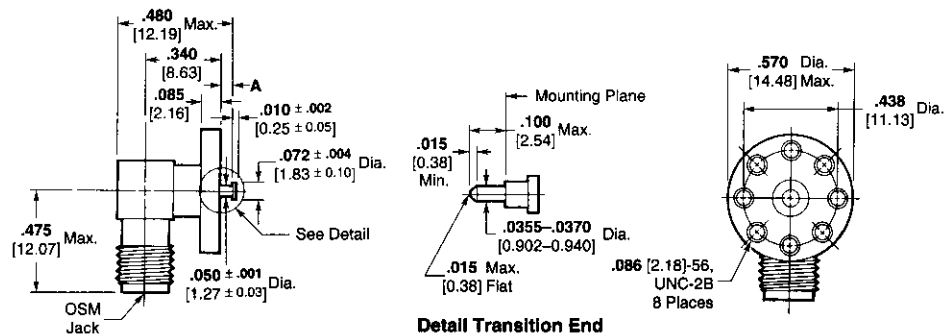

Detail Transition End

Outline 3

Military Part No.	AMP Part No.	M/A-COM ¹ Part No. (Ref. Only)	Outline	Dimension A
-31001	1053451-1	2068-8001-92	3	.060 ± .003 1.52 ± 0.08
-31002	1053453-1	2068-8002-92	3	.120 ± .003 3.05 ± 0.08
-32001	1053450-1	2068-8001-90	3	.060 ± .003 1.52 ± 0.08
-32002	1053452-1	2068-8002-90	3	.120 ± .003 3.05 ± 0.08

¹ -92 indicates passivated stainless steel finish.
-90 indicates gold plated finish.

RF Connectors