

SPECIFICATION OF PRODUCT

承认书

CUSTOMER: _____
DESCRIPTION: _____ Piezo Buzzer
FUSHENG P/N: _____ FSR-2240-L35
CUSTOMER P/N: _____
DATE: _____ 2020-8-28

CUSTOMER	APPROVER	CHECKER
	Yunqing Wu	Bing Yan

泰州福声电子科技有限公司

地址:江苏省泰州市海陵区凤凰西路98号

电话: 0086-523-86219066 传真: 0086-523-81601108

邮箱: sales@electronic-tech.cn

网址: www.tzfsdz.com

泰州福声电子科技有限公司

性能参数 Electrical Characteristics

型号 Part No: FSR-2240-L35


1	额定频率 Resonance Frequency (KHz)	5.0
2	最大电压 Max Input Voltage (Vp-p)	30
3	电容量 Capacitance at 1000Hz (nF)	25 ± 30%
4	*声压级 Sound Output at 10cm (dB)	≥95at 5KHz Square Wave 1 0 Vp-p
5	*消耗电流 Current Consumption (mA)	≤4 at 5KHz Square Wave 1 0 Vp-p
6	工作温度 Operating Temperature (°C)	-20~+60
7	储存温度 Storage Temperature (°C)	-30~+70
8	单品重量 Weight (g)	1.5
9	外壳材料 Housing Material	黑色 Black ABS

带*号指标需要在额定电压下测试 *Applying rated voltage


蜂鸣器焊接方法 Buzzer Soldering process	Soldering Parameter		
	温度 Temp.(°C)	时间 Time(Sec.)	可焊接次数 Times
回流焊 Reflow soldering	245±15	180℃预热 40~70 秒 245℃ 3 秒 above 180℃ time 40~70	3
波峰焊 Wave soldering	255±5	4~6	2~3
★手工焊 Manual soldering	350±10	2~5	2~3

带★号为推荐的焊接方法 Remark:★ Instance Soldering Process


外形图 DIMENSIONS (UNIT: mm) 未标注公差按±0.5mm 计算 Tolerance: ±0.5mm

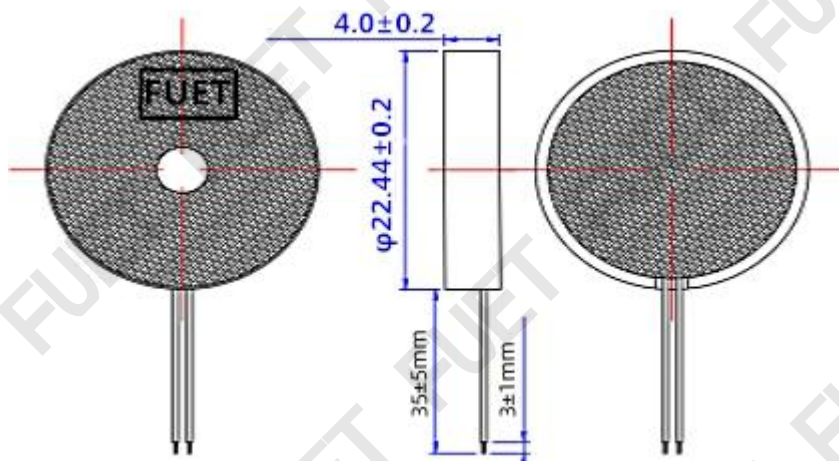

测试方法 TEST METHOD

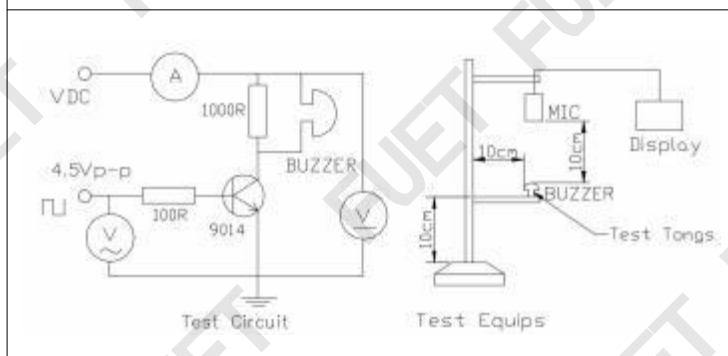

频响曲线 FREQUENCY RESPONSE

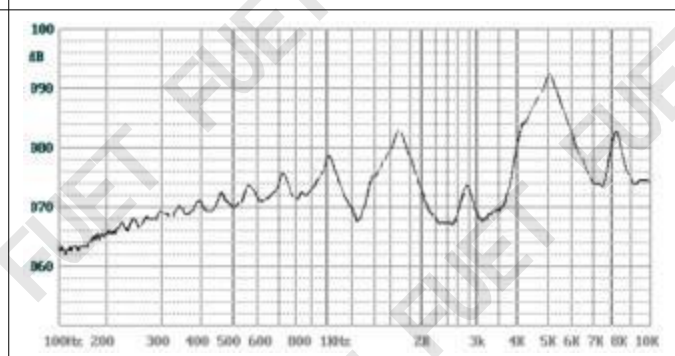

泰州福声电子科技有限公司		
型号 Part No: FSR-2240-L35		
可靠性测试 RELIABLY TEST		
项目 ITEM	测试条件 TESTING CONDITION	试验后要求 VARIANCE AFTER TEST
高温试验 High Temperature Test	产品置于 $+70\pm 2^{\circ}\text{C}$ 试验箱中,先工作 2 小时,然后在正常大气压条件下恢复 2 小时后,进行测量。 After being worked in a chamber at $+70\pm 2^{\circ}\text{C}$ for 2h and then being placed in natural condition for 2h,sounder shall be measured.	试验后,声响器的声级变化值在 $\pm 10\text{dB}$ 之内,外观无变化(例如:开裂,氧化,损伤,变形等现象) After test,the transducer S.P.L.difference shall be within $\pm 10\text{dB}$,and the appearance not exist any change to be harmful to normal operation(e.g.crack s,rusts,damages and especially distortion)
低温试验 Low Temperature Test	产品置于 $-30\pm 2^{\circ}\text{C}$ 试验箱中,先工作 2 小时,再放置 16 小时,然后在正常大气压条件下恢复 2 小时后,进行测量。 First being worked in a chamber at $-30\pm 2^{\circ}\text{C}$ for 2h and then being placed in a chamber at $-30\pm 2^{\circ}\text{C}$ for 16h,finally being placed in natural condition for 2h,sounder shall be measured.	
恒湿试验 Humidity Test	产品置于湿度为 90~95%R.H,温度为 $40\pm 2^{\circ}\text{C}$ 试验箱中 48 小时,然后在正常大气压条件下恢复 2 小时后,进行测量。 After being placed in a chamber with 90 to 95%R.H.at $40\pm 2^{\circ}\text{C}$ for 48h and then being placed in natural condition for 2h,sounder shall be measured.	
振动试验 Vibration Test	振幅为 0.75mm,频率为 10~30~10Hz,三个不同轴方向各振动 1 小时,试验后测量。 Sounder shall be measured after being applied vibration of amplitude of 0.75mm with 10 to 30 to 10Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour.	
自由落体试验 Freely Falling Test	在 0.8 米高处,将产品三方向自由落体在木板上,试验后测量。 Sounder shall be measured after freely falling the products from 0.8m high to the wooden board with three sides per time.	
碰撞试验 Collision Test	加速度 $100\pm 10\text{m/s}^2$,脉冲持续时间 16ms,重复频率 1~3 次/min,次数 1000 ± 10 次。试验后测量。 Sounder shall be measured after the test of acceleration $100\pm 10\text{m/s}^2$,impulse lasting time 16ms,repeat frequency 1~3/min and time 1000 ± 10 .	
可焊性试验 Solderability	引线剥头/针脚浸入松香焊剂 3 秒,然后再浸入 $+250\pm 5^{\circ}\text{C}$ 的锡锅中 3 ± 0.5 秒,引线剥头表面应覆盖一层光滑明亮的焊料。 Lead terminals are immersed in rosin for 3 seconds and then immersed in solder bath at $+250\pm 5^{\circ}\text{C}$ for 3 ± 0.5 seconds,terminals should be covered with the clean solder.	
引线/针脚强度试验 Terminal Strength Pulling	引线/针脚应承受 1N 拉力,拉力时间 10 秒,引线无松动和脱落等现象。 The force 10 seconds of 1N is applied to each terminal in axial direction.no looseness and falling off.	