

BTA16-600XW

THREE-QUADRANT TRIAC



VOLTAGE: 600 Volts

CURRENT: 16 Ampers

Package: TO-220A

Marking and Polarity

FEATURES


- Highly di/dt For High Reliability
- Low On-State Voltage For Low Power Consumption
- Ceramic Pad For Internal Insulation
- RoHS Compliant

TYPICAL APPLICATIONS

- Phase Control Operation Of Light Dimmers And Motor Speed Controllers
- ON/OFF Control Operation Of Heating Regulation And Induction Motor
- **Weight: App. 2.057 Grams (0.07255 Ounce)**

PRODUCT SUMMARY

Item	TW	SW	CW	BW	Unit
$I_{T(RMS)}$	16				A
V_{DRM}/V_{RRM} Min.	600				V
$I_{GT(I-II-III)}$ Max.	5	10	35	50	mA



Remark:

- ①. NH=Nihang Trademark
- ②. FF=Product Line Code, According To Actual Changes
YWW=Date Code, According To Actual Changes
LLWWF=Internal Code, According To Actual Changes
- ③. BTA16-600XW=Model, XW=TW, SW, CW, BW

Absolute Maximum Ratings (Ta=25°C Unless otherwise specified)

Parameter	Test Conditions	Symbol	BTA16-600XW	Unit
Repetitive Peak Off-State Voltage		V_{DRM}	600	V
Repetitive Peak Reverse Voltage		V_{RRM}	600	V
RMS On-State Current	$T_c \leq 80^\circ C$	$I_{T(RMS)}$	16	A
Non Repetitive Surge Peak On-State Current	$F = 50 \text{ Hz}, T_p = 20 \text{ ms}$	I_{TSM}	160	A
I^2T Value For Fusing	$T_p = 10 \text{ ms}$	I^2t	128	A
Critical Rate Of Rise Of On-State Current	$I_G = 2 \cdot I_{GT}, t_r \leq 10 \text{ ns}$ $F = 100 \text{ Hz}, T_j = 150^\circ C$	di/dt	100	A/ μs
Peak Gate Current	$T_p = 20 \mu s, T_j = 150^\circ C$	I_{GM}	4.0	A
Average Gate Power Dissipation	$T_j = 150^\circ C$	$P_{G(AV)}$	1.0	W
Maximum Mounting Torque	M3 screw	T_{MM}	1.1	N.m

Thermal Characteristics (Ta=25°C Unless otherwise specified)

Parameter	Symbol	BTA16-600XW	Unit
Operating Junction Temperature Range	T_J	-40 to 150	$^\circ C$
Storage Temperature Range	T_{STD}	-40 to 150	
Typical Thermal Resistance	$R_{\theta JA}$	60.0	$^\circ C/W$
	$R_{\theta JC}$	2.0	

BTA16-600XW

THREE-QUADRANT TRIAC



Electrical Characteristics (Ta=25°C Unless otherwise specified)

Parameter	Test Conditions	Symbol	Quadrants	Value				Unit
				TW	SW	CW	BW	
Gate Trigger Current	VD=12V, IT=0.1A	I_{GT}	I - II - III	≤5	≤10	≤35	≤50	mA
Gate Trigger Voltage	VD=12V, IT=0.1A	V_{GT}	I - II - III	≤ 1.0				V
Holding Current	IT=100mA	I_H		≤15	≤15	≤40	≤50	mA
Latching Current	IG=1.2*IGT	I_L	I - III	≤15	≤25	≤50	≤70	mA
			II	≤20	≤30	≤60	≤80	
Rise Of Off- State Voltage	VD=2/3*VDRM, Gate open, Tj =150°C	dv/dt		≥100	≥500	≥1200	≥2000	V/us
Peak On-State Voltage	IT= 16 A, Tj =25°C	V_{TM}		≤ 1.65				V
Peak Repetitive Forward Blocking Current	$V_D=V_{DRM}$, Tj =25°C	I_{DRM}		≤ 5				uA
	$V_D=V_{DRM}$, Tj =125°C			≤ 2				mA
Peak Repetitive Reverse Blocking Current	$V_R=V_{RRM}$, Tj =25°C	I_{RRM}		≤ 5				uA
	$V_R=V_{RRM}$, Tj =125°C			≤ 2				mA

Model and identification instructions

BT	1	16	A	-	600	xW
Product Type BT=TRIAC						
Insulation Spec.: A=Insulation B=No insulation						
IT(RMS) Spec.: 16 = 16A						
Package Spec.: A= TO-220A						
"-"=Connector constant						
VDRM/VRRM Spec. 600 = 600V						
IGT Spec. TW:IGT I -III≤5mA SW:IGT I -III≤10mA CW:IGT I -III≤35mA BW:IGT I -III≤50mA						

BTA16-600XW

THREE-QUADRANT TRIAC



Typical Characteristics Curves

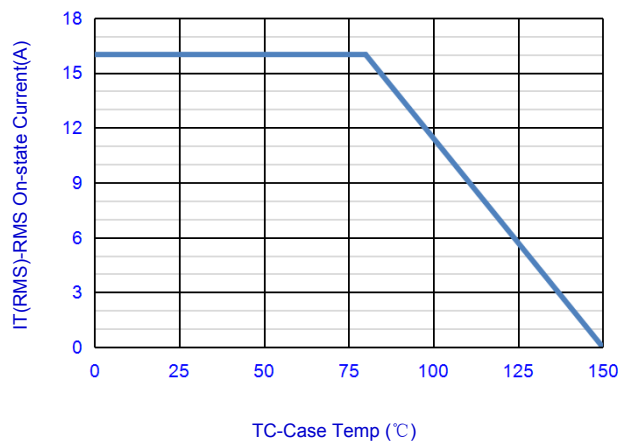


Fig.1-RMS on-state current vs. case temperature

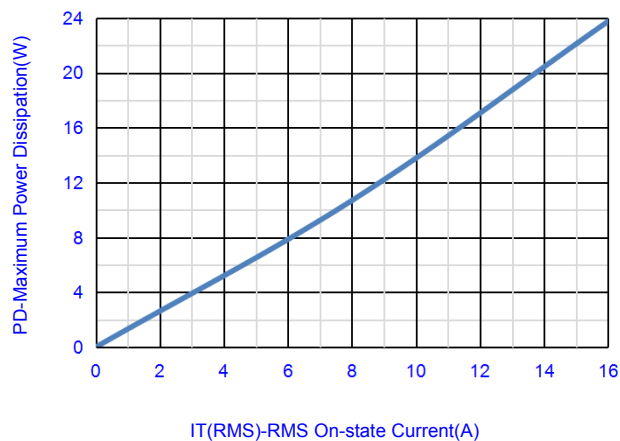


Fig.2- Maximum Power Dissipation Vs. on-state current

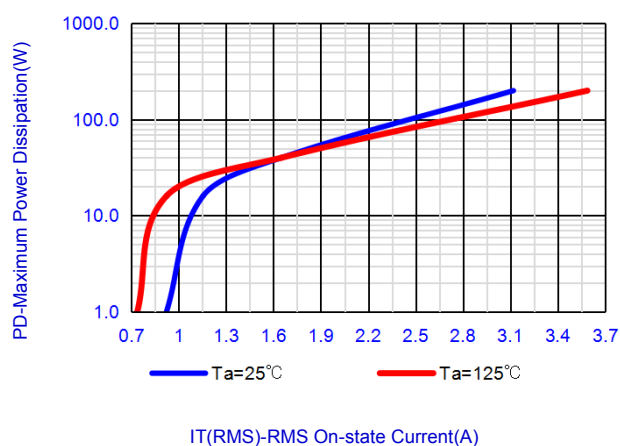


Fig.3- Maximum Power Dissipation Vs. on-state current

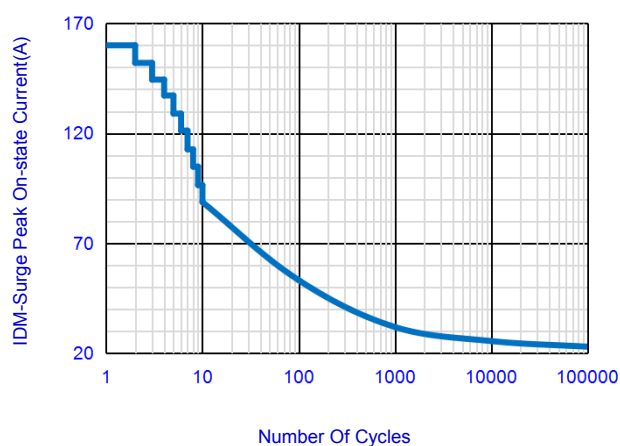


Fig.4- Surge Peak On-state Current Vs. Number Cycles

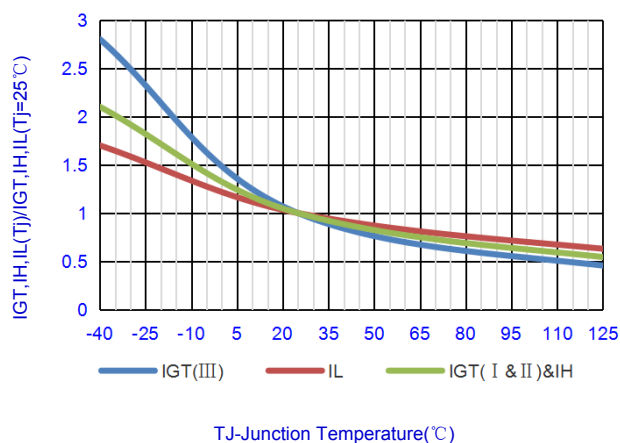


Fig.5- Relative Variation Of Gate Trigger Current , Holding Current And Latching Current Versus Junction Temperature (Typical Value)


BTA16-600XW

THREE-QUADRANT TRIAC



OUTLINE DRAWINGS

TO-220A

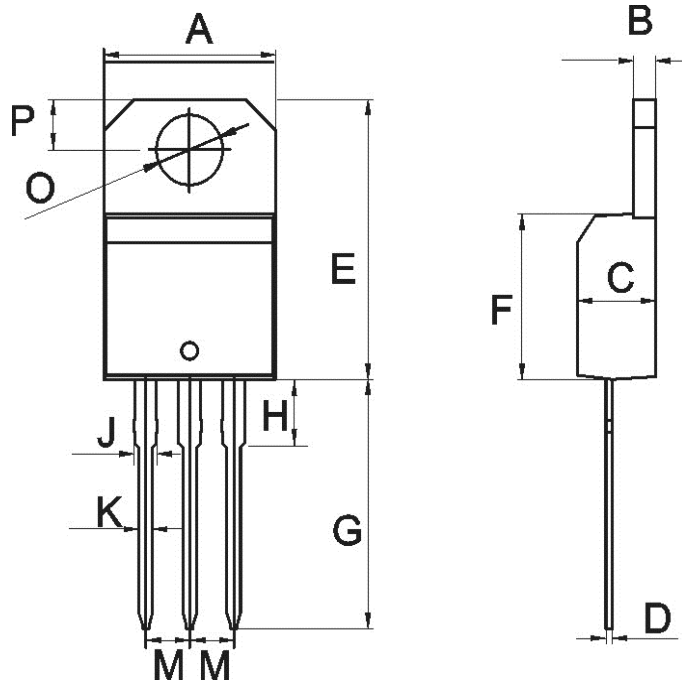

OUTLINE DIMENSIONS

Dim.	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.25	--	10.75	0.3642	--	0.4232
B	1.15	--	1.45	0.0453	--	0.0571
C	4.20	--	4.70	0.1654	--	0.1850
D	0.45	--	0.65	0.0177	--	0.0256
E	14.70	--	16.70	0.5787	--	0.6575
F	8.55	--	10.05	0.3366	--	0.3957
G	12.50	--	14.50	0.4921	--	0.5709
H	3.00	--	4.00	0.118	--	0.157
J	1.20	--	1.40	0.0472	--	0.0551
K	0.70	--	1.00	0.0276	--	0.0394
M	2.20	--	3.00	0.0866	--	0.1181
O	3.45	--	4.15	0.1358	--	0.1634
P	2.40	--	3.40	0.0945	--	0.1339

PACKING INFORMATION

Package Code	Package Method	Box Size L×W×H (mm)	Quantity (pcs/box)	Carton Size L×W×H (mm)	Quantity (pcs/carton)
TO-220A	Tube Packaging	570*153*47	1000	580*250*180	5000

BTA16-600XW


THREE-QUADRANT TRIAC



Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds

Recommended temperature profile for IR reflow

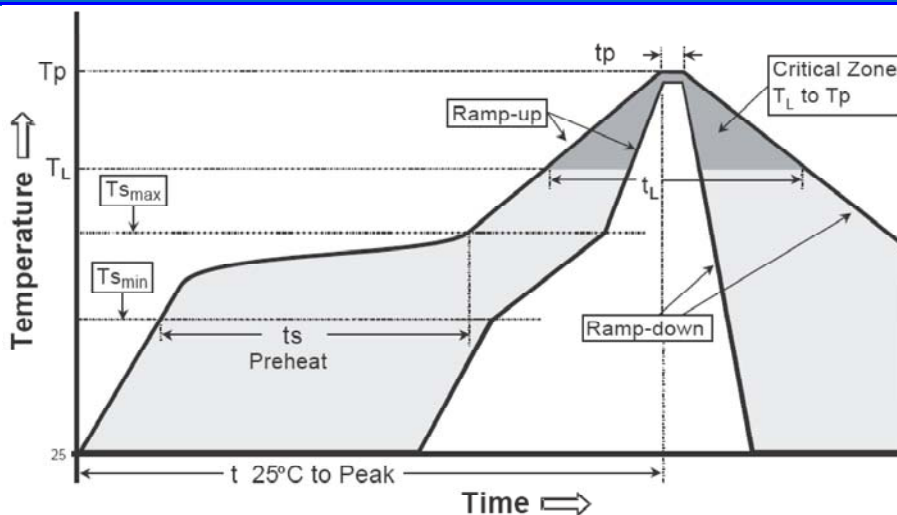

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat -Temperature Min(TS min) -Temperature Max(TS max) -Time(ts min to ts max)	100°C 150°C 60-120 seconds	150°C 200°C 60-180 seconds
Time maintained above: -Temperature (TL) - Time (tL)	183°C 60-150 seconds	217°C 60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

BTA16-600XW

THREE-QUADRANT TRIAC



Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from niuhang Electronics co., LTD
- Nihang Electronics co., LTD. reserves the rights to make changes of the content herein the document anytime without notification.
- Nihang Electronics co., LTD. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Nihang Electronics co., LTD. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Nihang Electronics co., LTD. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Nihang Electronics co., LTD. for any damages resulting from such improper use or sale.
- When the appearance of the product and chip size does not change, in order to product the customer. quality, change the internal structure and the production process Nihang can not notify