

General Description

MUR1660CT Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications.

Features

- Common Cathode
- Super fast switching for high efficiency
- High forward surge current capability
- RoHS Compliant


Product Summary

V_{RRM}	V_F	$I_{F(AV)}$
600V	1.6V	16A

Applications

- Switched Mode Power Supplies (SMPS)
- inverter

TO-220 Pin Configuration

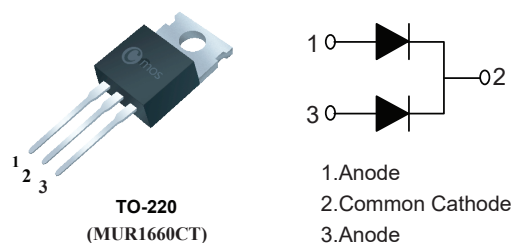

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{RRM}	Peak Repetitive Reverse Voltage	600	V
$I_{F(AV)}$	Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% duty cycle	8 (Per Leg) 16 (Total)	A
T_{RR}	Reverse Recovery Time($I_F=0.5A$, $I_R=1A$, $I_{REC}=0.25A$)	≤ 35	nS
I_{FSM}	Forward Peak Surge Current(Rated Load 8.3ms Half Mssine Wave-According to JEDEC Method)	110X2	A
dv/dt	Voltage rate of change (Rated VR)	10000	V/uS
I_{RRM}	Peak Repetitive Reverse Surge Current (2uS, 1Khz)	0.5	A
T_J	Operating Junction Temperature	150	°C
T_{STG}	Storage Temperature	-40 to 150	°C


Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case(Per Leg)	2	---	°C/W


Electrical Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop per diode	$I_F=8A$, $T_C=25^{\circ}C$	---	1.3	1.6	V
		$I_F=8A$, $T_C=125^{\circ}C$	---	---	1.28	
I_R	Reverse Leakage Current per diode	$V_R=600V$, $T_C=25^{\circ}C$	---	---	0.01	mA
		$V_R=600V$, $T_C=125^{\circ}C$	---	---	0.1	


Characteristic Curves

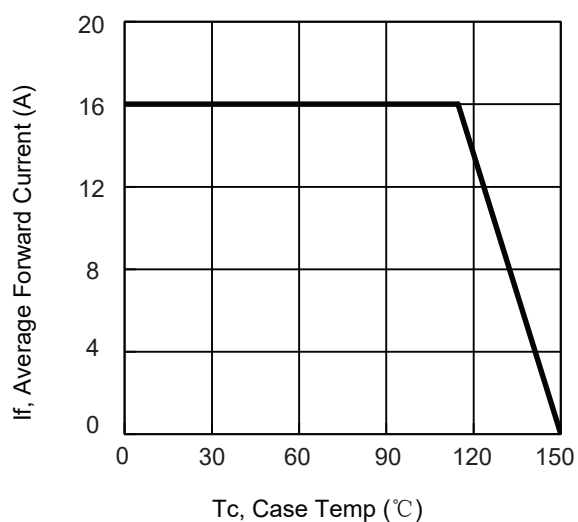

Current derating curve, per element

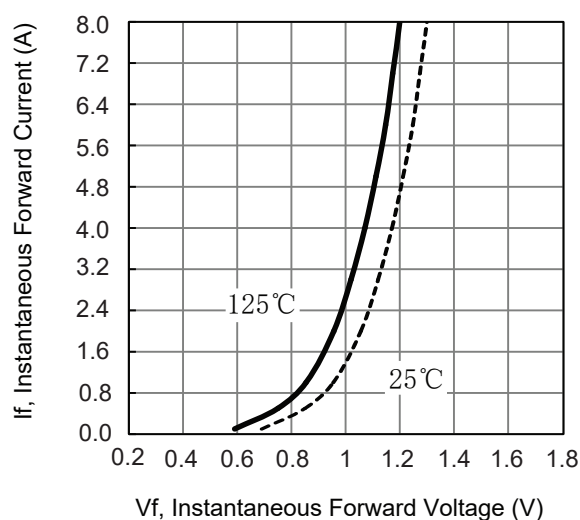

The forward voltage and forward current curve

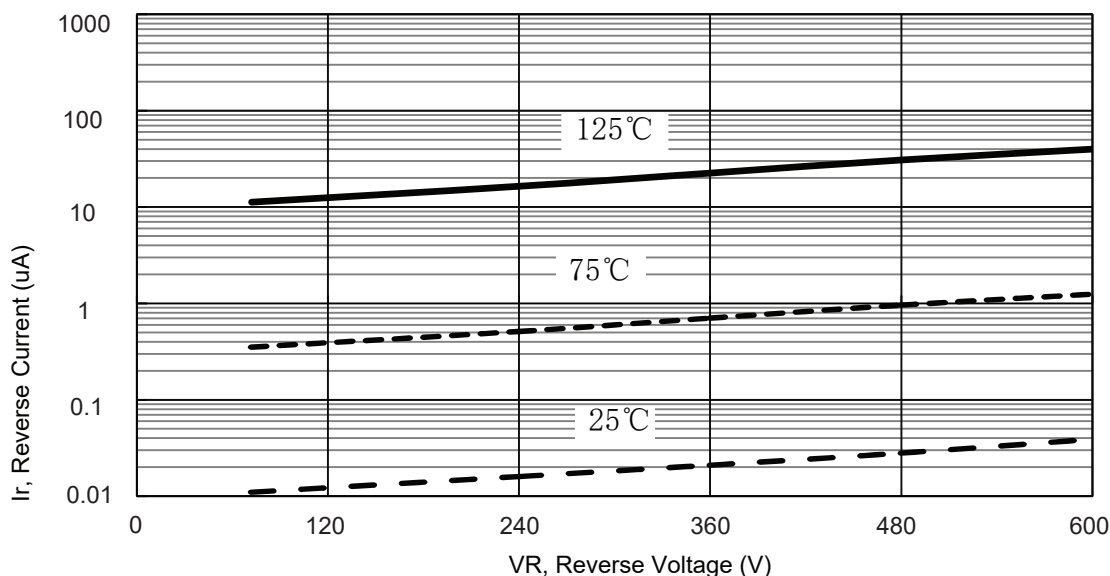

The reverse leak current and the reverse voltage (single-device) curve

This product has been designed and qualified for the consumer market.
 Cmos assumes no liability for customers' product design or applications.
 Cmos reserves the right to improve product design, functions and reliability without notice.