


# Wire Wound Type Common Mode Filter




1. High common mode impedance at high frequency cause excellent noise suppression performance.
2. WCM2012L2NF series realizes small size and low profile. 2.0x1.2x1.0 mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.

Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)max.	Rated Volt. (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
WCM2012L2NF-900T04 H	90±25%	100	0.30	400	50	125	10M

## MECHANICAL

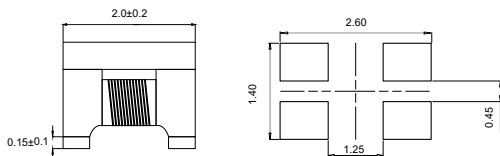


SUGGEST LAYOUT

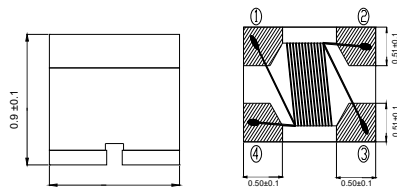


Dimension: mm


## SCHEMATICS

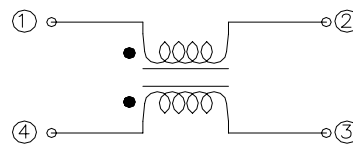

## IMPEDEANCE FREQUENCY

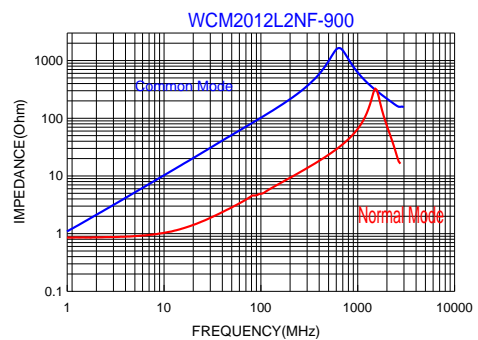


## TAPING AND PACKING

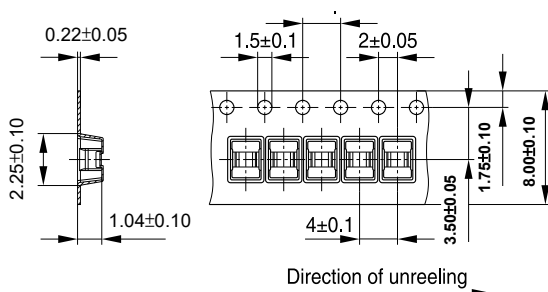

IND1752-J-E

## Reel

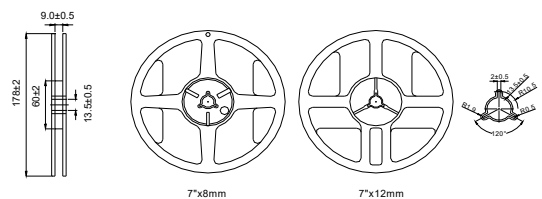

Dimensions in mm

Quantity (pcs):  
4000 PCS PER REEL  
5 REELS PER CARTON  
20000PCS PER CARTON