

Accessories Slim Interface Relay SNR

- Module width 6.2 mm
- Reduced system width for increased packing density on the DIN rail
- DC and AC version
- Electrical indicator as standard (LED)
- Protection circuit
- Screw- or cage clamp terminals
- Jumper bars


Approvals

VDE Cert. No. 40010063, cULus E224918

Technical data	ST3F/ST4F
Rated voltage/Max. switching voltage AC	240/400 VAC
Rated current	6 A
Dielectric strength coil-contact circuit	4000 V _{rms}
Clearance / creepage coil-contact circuit	≥ 6/8 mm
Material group of insulation parts	IIIa
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	reinforced
open contact circuit	functional
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	230/400 V
Overvoltage category	III
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter	
Ambient temperature range	-20...+55°C
Terminals	screw / cage clamp
Terminal screw torque acc. IEC 61984	0.5 Nm
max.	0.6 Nm
Wire cross section	
single wire	0.14...2.5 mm ²
fine wire	0.14...2.5 mm ²
with bootlace crimp (DIN 46228/1)	0.14...2.5 mm ²
Insertion cycles	A (10)
Max. Insertion Force total	100 N
Mounting distance	≥ 0 mm, dense packing
Weight	26 g
Packaging unit	10 pcs

Sockets

Type	Part Number
ST 3F LC4 DIN-rail socket 24VDC, for relays 12/24/48 VDC, with LED, protection and polarity diode, screw terminals	2-1416100-0
ST 3F SM5 DIN-rail socket 115VAC/VDC with LED and protection circuit, screw terminals	2-1416100-1
ST 3F TP0 DIN-rail socket 230VAC/VDC with LED and protection circuit, screw terminals	2-1416100-2

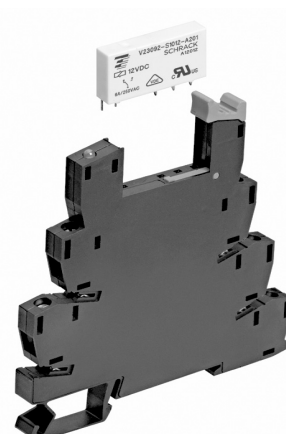

F0260-B




Accessories


Type	Part Number
ST 36 040 Separation element	2-1416100-6
ST 37 001 Jumper bar, red, 500 mm	2-1416100-7
ST 37 002 Jumper bar, blue, 500 mm	2-1416100-8
ST 37 003 Jumper bar, grey, 500 mm	2-1416100-9
ST 37 040 Marking plate, consisting of 100 marking tabs	4-1416100-0

Relay Packages

Complete packages consisting of a relay mounted on a socket:
see Relay Package SNR

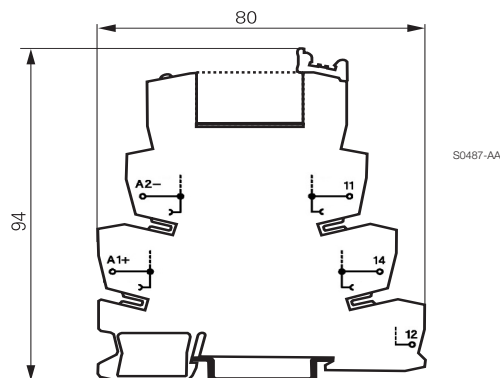

S0487-AA



Version with
screw terminals