# Radial, Molded, COG Dielectric, 50 - 200 VDC (Commercial Grade)



#### **Overview**

KEMET's epoxy molded radial through-hole ceramic capacitors in COG dielectric feature a 125°C maximum operating temperature. The Electronics Industries Alliance (EIA) characterizes COG dielectric as a Class I "stable" material. Components of this classification are temperature compensating and are suited for resonant circuit applications or those where Q and stability of capacitance characteristics are required. COG exhibits no change in capacitance with respect to time and voltage and boasts a negligible change in capacitance with reference to ambient temperature. Capacitance change is limited to ±30 ppm/°C from -55°C to +125°C. These devices meet the flame test requirements outlined in UL Standard 94 V-0.

## **Applications**

Typical applications include critical timing, tuning, circuits requiring low loss, circuits with pulse, high current, decoupling, bypass, filtering, transient voltage suppression, blocking and energy storage.

## **Benefits**

- · Radial through-hole form factor
- · Molded case
- -55°C to +125°C operating temperature range
- DC voltage ratings of 50 V, 100 V and 200 V
- Capacitance offerings ranging from 1.0 pF up to 0.18 μF
- Available capacitance tolerances of ±0.5 pF, ±1%, ±2%, ±5%, and ±10%
- No piezoelectric noise
- · Extremely low ESR and ESL
- · High thermal stability
- High ripple current capability
- No capacitance change with respect to applied rated DC voltage
- Negligible capacitance change with respect to temperature from -55°C to +125°C
- · No capacitance decay with time
- · Non-polar device, minimizing installation concerns
- SnPb-plated lead finish (60/40)
- 100% pure matte tin-plated lead finish option available upon request (RoHS)
- Encapsulation meets flammability standard UL 94 V-0





## **Ordering Information**

С	052	С	272	F	2	G	5	Т	A	7303
Ceramic	Style/ Size	Specification/ Series	Capacitance Code (pF)	Capacitance Tolerance <sup>1</sup>	Rated Voltage (VDC)	Dielectric	Design	Lead Finish <sup>2</sup>	Failure Rate	Packaging/ Grade (C-Spec) <sup>3</sup>
	052 062 512 522	C = Standard	Two significant digits and number of zeros Use 9 for 1.0 - 9.9 pF Use 8 for 0.599 pF ex. 2.2 pF = 229 ex. 0.5 pF = 508	D = ±0.5 pF F = ±1% G = ±2% J = ±5% K = ±10%	1 = 100 2 = 200	G = COG	5 = Multilayer	T = 100% Matte Sn C = SnPb (60/40)	A = N/A	Blank = Bulk 7301 = 12" Reel 7303 = 12" Reel 7293 = Ammo Pack

<sup>&</sup>lt;sup>1</sup> Additional capacitance tolerance offerings may be available. Contact KEMET for details.

Standard: 60% tin (Sn)/40% lead (Pb) finish with 100% copper core ( "C" designation).


Optional (C052 and C062 only): 100% matte tin (Sn) with nickel (Ni) underplate and steel core ("T" designation).

Alternative lead materials and finishes may be available. Contact KEMET for details.

C-Spec 7301: Recommended for straight lead configuration part types.

C-Spec 7301: Recommended for formed (bent) lead configuration part types.

## **Dimensions - Inches (Millimeters)**



Series	Style/ Size	S Lead Spacing	L Length	H Height	T Thickness	LD Lead Diameter	LL Lead Length Minimum
C05X	052/056	0.20±0.015	0.19±0.01 (4.83±0.25)	0.19±0.01 (4.83±0.25)	0.09±0.01 (2.29±0.25)		
C06X	062/066	(5.08±0.38)	0.29±0.01 (7.37±0.25)	0.29±0.01 (7.37±0.25)	0.09±0.01 (2.29±0.25)	0.025+0.004/-0.002	1.05 (21.75)
OFVV	512	0.40±0.02	0.48±0.02 (12.19±0.51)	0.48±0.02 (12.19±0.51)	0.14±0.01 (3.56±0.25)	(0.635+0.102/-0.051)	1.25 (31.75)
C5XX	522	(10.16±0.51)	0.48±0.02 (12.19±0 .51)	0.48±0.02 (12.19±0.51)	0.24±0.01 (6.10±0.25)		

<sup>&</sup>lt;sup>2</sup> Lead materials and finishes:

<sup>3</sup> Reeling options:



## **Application Notes**

These devices are not recommended for use in overmold applications and/or processes

## **Qualification/Certification**

Commercial Grade products are subject to internal qualification. Details regarding test methods and conditions are referenced in Table 2, Performance & Reliability.

# **Environmental Compliance**

Devices with standard lead finish option of 60% tin (Sn)/40% lead (Pb) do not meet RoHS criteria. Devices with 100% matte tin (Sn) lead finish option are RoHS Compliant (C052 & C062 only).

#### **Electrical Parameters/Characteristics**

Item	Parameters/Characteristics	
Operating Temperature Range	-55°C to +125°C	
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	±30 ppm/°C	
Aging Rate (Maximum % Cap Loss/Decade Hour)	0%	
Dielectric Withstanding Voltage	250% of rated voltage (5±1 seconds and charge/discharge not exceeding 50 mA)	
Dissipation Factor (DF) Maximum Limit at 25°C	0.1%	
Insulation Resistance (IR) Limit at 25°C	1,000 megohm microfarads or 100 GΩ (Rated voltage applied for 120±5 seconds at 25°C)	

To obtain IR limit, divide  $M\Omega$ - $\mu$ F value by the capacitance and compare to  $G\Omega$  limit. Select the lower of the two limits. Capacitance and dissipation factor (DF) measured under the following conditions:

1 MHz  $\pm 100$  kHz and 1.0  $V_{rms} \pm 0.2$  V if capacitance  $\leq 1,000$  pF

1 kHz  $\pm$ 50 Hz and 1.0 V $_{rms}$   $\pm$ 0.2 V if capacitance > 1,000 pF

Note: When measuring capacitance it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

## **Post Environmental Limits**

High Temperature Life, Biased Humidity, Moisture Resistance						
Dielectric	Dielectric Rated DC Voltage Capacitance Value DF (%) Capacitance Shift					
COG	All	All	0.5	0.3% or ±0.25 pF		



# Table 1A - C052 Style/Size (0.20" Lead Spacing), Capacitance Range Waterfall

	C052 Style	/Size (0.20" Lead S	pacing)	
Rated Volt	tage (VDC)	50	100	200
Voltag	e Code	5	1	2
Capacitance	Capacitance Tolerance	Capac	itance Code (Available Ca	apacitance)
1pF		109	109	109
1.5pF		159	159	159
2.2pF		229	229	229
2.7pF	D = ±0.5 pF	279	279	279
3.3pF		339	339	339
3.9pF 4.7pF		399 479	399 479	399 479
4.7μr 5.6pF		569	569	569
6.8pF		689	689	689
8.2pF		829	829	829
10pF		100	100	100
12pF		120	120	120
15pF	J = ±5% K = ±10%	150	150	150
18pF		180	180	180
22pF		220	220	220
27pF	G = ±2% J = ±5% K = ±10%	270	270	270
33pF		330	330	330
39pF		390	390	390
47pF		470	470	470
56pF		560	560	560
68pF	}	680 820	680 820	680
82pF 100pF		101	820 101	820 101
120pF	}	121	121	121
150pF	1	151	151	151
180pF		181	181	181
220pF	1	221	221	221
270pF	ĺ	271	271	271
330pF		331	331	331
390pF		391	391	391
470pF	F = ±1%	471	471	471
560pF	G = ±2%	561	561	561
680pF	J = ±5%	681	681	681
820pF	K = ±10%	821	821	821
1000pF		102	102	102
1200pF		122 152	122 152	122 152
1500pF 1800pF		182	182	182
2200pF		222	222	222
2700pF		272	272	272
3300pF		332	332	2,2
2700pF		272	272	
3300pF		332	332	
3900pF		392	392	
4700pF		472	472	
Rated Volt	tage (VDC)	50	100	200
Voltan	e Code	5	1	2



# Table 1B - C062 Style/Size (0.20" Lead Spacing), Capacitance Range Waterfall

	C062 Style	e/Size (0.20" Lead S	Spacing)	
Rated Vol	tage (VDC)	50	100	200
Voltag	e Code	5	1	2
Capacitance	Capacitance Tolerance	Capacitance Code (Available Capacitance)		
3300pF		332	332	332
3900pF		392	392	392
4700pF		472	472	472
5600pF	ao.	562	562	562
6800pF	F = ±1%	682	682	682
8200pF	G = ±2% J = ±5%	822	822	822
0.01µF	J = ±5% K = ±10%	103	103	103
0.012μF	K - 110%	123	123	
0.015µF		153	153	
0.018µF		183	183	
0.022µF		223	223	
Rated Volt	tage (VDC)	50	100	200
Voltage Code		5	1	2

# Table 1C - C512 Style/Size (0.40" Lead Spacing), Capacitance Range Waterfall

C512 Style/Size (0.40" Lead Spacing)					
Rated Volt	age (VDC)	50	100	200	
Voltag	e Code	5	1	2	
Capacitance Capacitance Tolerance		Capacitance Code (Available Capacitance)			
0.012μF		123	123	123	
0.015μF		153	153	153	
0.018µF		183	183	183	
0.022μF		223	223	223	
0.027μF	F = ±1%	273	273	273	
0.033μF	G = ±2%	333	333	333	
0.039µF	J = ±5%	393	393	393	
0.047µF	K = ±10%	473	473	473	
0.056µF		563	563	563	
0.068µF		683	683	683	
0.082µF		823	823		
0.1μF		104	104		
Rated Volt	age (VDC)	50	100	200	
Voltag	e Code	5	1	2	



# Table 1D - C522 Style/Size (0.40" Lead Spacing), Capacitance Range Waterfall

C522 Style/Size (0.40" Lead Spacing)						
Rated Vo	ltage (VDC)	50	100	200		
Volta	ge Code	5	1	2		
Capacitance	Capacitance Capacitance Tolerance		Capacitance Code (Available Capacitance)			
0.082μF 0.1μF 0.12μF 0.15μF 0.18μF	F = ±1% G = ±2% J = ±5% K = ±10%	823 104 124 154 184	823 104 124 154 184	823 104		
Rated Vo	Rated Voltage (VDC)		100	200		
Volta	Voltage Code		1	2		




## **Soldering Process**

#### **Recommended Soldering Technique:**

- · Solder Wave
- Hand Soldering (Manual)


### **Recommended Soldering Profile:**

· Optimum Wave Solder Profile

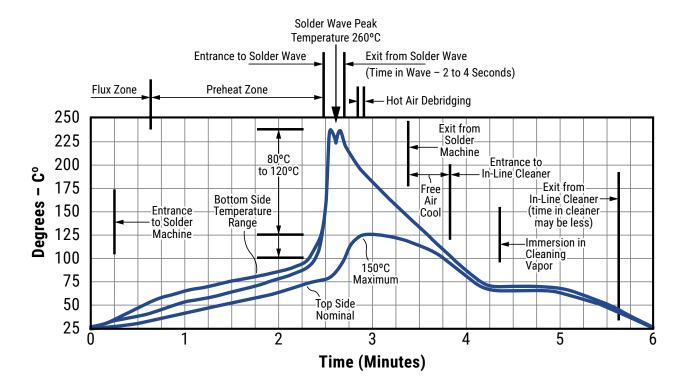

· Hand Soldering (Manual)

#### **Manual Solder Profile with Pre-heating**

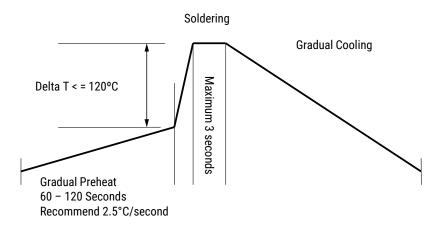

KEMET recommends following the guidelines and techniques outlined in technical bulletins F2103 and F9207.



## Table 2 - Performance & Reliability: Test Methods and Conditions

Stress	Reference	Test or Inspection Method
		Magnification 50 X. Conditions:
Caldarah ilitur	J-STD-002	a) Method B, 4 hours at 155°C, dry heat at 235°C
Solderability	J-21D-002	b) Method B at 215°C category 3
		c) Method D, category 3 at 260°C
Temperature Cycling	JESD22 Method JA-104	1,000 cycles (-55°C to +125°C), Measurement at 24 hours. +/-2 hours after test conclusion.
2	MIL-STD-202 Method	Load Humidity: 1,000 hours 85°C/85% RH and Rated Voltage. Add 100 K ohm resistor. Measurement at 24 hours. +/-2 hours after test conclusion.
Biased Humidity	103	Low Volt Humidity: 1,000 hours 85°C/85% RH and 1.5 V. Add 100 K ohm resistor.  Measurement at 24 hours. +/-2 hours after test conclusion.
Moisture Resistance	MIL-STD-202 Method 106	t = 24 hours/cycle. Steps 7a and 7b not required. Unpowered. Measurement at 24 hours. +/-2 hours after test conclusion.
Thermal Shock	MIL-STD-202 Method 107	-55°C/+125°C. Note: Number of cycles required – 300. Maximum transfer time – 20 seconds. Dwell time – 15 minutes. Air – Air.
High Temperature Life	MIL-STD-202 Method 108 /EIA-198	1,000 hours at 125°C (85°C for X5R, Z5U and Y5V) with 2 X rated voltage applied.
Storage Life	MIL-STD-202 Method 108	150°C, 0 VDC, for 1,000 hours.
Vibration	MIL-STD-202 Method 204	5 g for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8"X5" PCB .031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10 – 2,000 Hz.
Resistance to Soldering Heat	MIL-STD-202 Method 210	Condition B. No pre-heat of samples. Note: single wave solder – procedure 2.
Terminal Strength	MIL-STD-202 Method 211	Conditions A (2.3 kg or 5 lbs)
Mechanical Shock	MIL-STD-202 Method 213	Figure 1 of Method 213, Condition F.
Resistance to Solvents	MIL-STD-202 Method 215	Add aqueous wash chemical, OKEM Clean or equivalent.

## **Storage & Handling**

Ceramic chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature—reels may soften or warp, and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C, and maximum storage humidity not exceed 70% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts, and atmospheres should be free of chlorine and sulfur bearing compounds. For optimized solderability, chip stock should be used promptly, preferably within 1.5 years of receipt.



# **Packaging Details**

Lead Spacing	Component Pitch (P1)
0.100 (2.54)	5.08
0.200 (5.08)	3.81
0.400 (10.16)	7.62
0.170 (4.32)	
0.220 (5.59)	
0.275 (6.98)	
0.300 (7.62)	
0.375 (9.52)	
0.475 (12.06)	
0.575 (14.60)	
0.675 (17.14)	

# **Packaging Quantities**

Style/ Size	Standard Bulk Quantity	Ammo Pack Quantity Maximum	Reel Quantity Maximum (12" Reel)	
052	100/Bag	2000	2000	
062	100/Bag	1500	1500	
512	Can Natal	NI/A	NI/A	
522	See Note <sup>1</sup>	N/A	N/A	

<sup>&</sup>lt;sup>1</sup>Quantity varies. For further details, please contact KEMET.

# **Marking**

#### C052C & C062C STANDARD MARKING

FRONT	BACK	
C062	100V	Voltage
X7R	Κ —	KEMET
104K	0811	——— Date Code
	C062 X7R	C062 X7R 100V K

#### C512 & C522 STANDARD MARKING

KEMET C512X7R 105K 50V	KEMET SIZE and Temperature Characteristic Capacitance, Capacitance Tolerance, Voltage
0832	Date Code



## **KEMET Electronics Corporation Sales Offices**

For a complete list of our global sales offices, please visit www.kemet.com/sales.

#### **Disclaimer**

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.