


High-current EMC/RFI Filter




- Off-the-shelf high power filter for rated currents up to 2500 A
- HV versions applicable for IT power networks
- Busbars for convenient and universal electrical connection
- Protective plastic covers optionally available for unsurpassed safety



Performance indicators

Attenuation performance

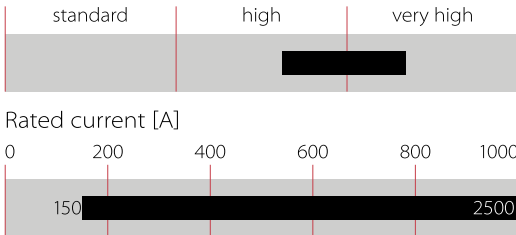

Technical Specifications

|                                           |                                                                                                                                                                |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum continuous operating voltage      | 3x 760/440 VAC (FN 3359 HV)<br>3x 520/300 VAC (FN 3359)                                                                                                        |
| Operating frequency                       | DC to 60 Hz                                                                                                                                                    |
| Rated currents                            | 150 to 2500 A @ 50°C                                                                                                                                           |
| High potential test voltage               | P -> P 3270 VDC for 2 sec (FN 3359 HV)<br>P -> E 2750 VDC for 2 sec (FN 3359)<br>P -> P 2250 VDC for 2 sec (FN 3359)<br>P -> E 3200 VDC for 2 sec (FN 3359 HV) |
| Protection category                       | IP 00                                                                                                                                                          |
| Overload capability                       | 4x rated current at switch on,<br>1.5x rated current for 1 minute, once per hour                                                                               |
| Temperature range (operation and storage) | -25°C to +100°C (25/100/21)                                                                                                                                    |
| Flammability corresponding to             | UL 94 V-2 or better                                                                                                                                            |
| Design corresponding to                   | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939                                                                                                                     |
| MTBF @ 45°C/480 V (Mil-HB-217F)           | 130,000 hours                                                                                                                                                  |

Approvals & Compliances



UL: 600/400 VAC for 1600A and 2500A @ 40°C ambient temp.; ENEC up to 1600A: 690/400 VAC

Features and Benefits


- High-power filter for Class A compliance. With approval measurement also Class B compliance possible for some applications
- Extremely compact high-current filter solution with minimum space requirement
- FN 3359 HV versions are applicable for IT power networks
- Optionally available transparent protective covers for all filters up to 1000 A, to protect the installer, operator or inspector from undeliberate touching of life conductors. They can easily be retrofitted even if the filter is already installed and connected
- FN 3359 also improves conducted immunity of installations

Typical Applications

- High-power motor drives, inverters and converters
- Industrial three-phase systems
- Entire factories, plants and installations
- Large UPS
- Machinery
- Mining equipment
- Photovoltaic systems with galvanic isolation\*
- Wind turbines

\* For EMI solutions for PV system without galvanic isolation, please contact your local Schaffner partner

Typical electrical schematic

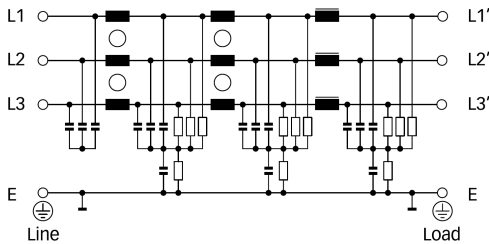

Note: HV versions without discharge resistor to ground.

Filter Selection Table

| Filter           | Buy                                                                                 | Rated current | Typical drive | Leakage current**   | Power loss   | Input/Output                                                                        |                                                                                     | Weight | Protective |
|------------------|-------------------------------------------------------------------------------------|---------------|---------------|---------------------|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|------------|
|                  |                                                                                     | @ 50°C (40°C) | power rating* | @ 520/760 VAC/50 Hz | @ 25°C/50 Hz | connections                                                                         |                                                                                     |        | covers***  |
|                  |                                                                                     | [A]           | [kW]          | [mA]                | [W]          |  |  | [kg]   | Order code |
| FN3359-150-28    |    | 150 (164)     | 75            | 5.1                 | 24           | -28                                                                                 |                                                                                     | 5.8    | 801917     |
| FN3359-180-28    |    | 180 (197)     | 90            | 5.1                 | 34           | -28                                                                                 |                                                                                     | 5.8    | 801917     |
| FN3359-250-28    |    | 250 (250****) | 132           | 5.1                 | 49           | -28                                                                                 |                                                                                     | 9.0    | 801918     |
| FN3359-320-99    |    | 320 (350)     | 160           | 5.1                 | 19           |                                                                                     | -99                                                                                 | 10.5   | 801919     |
| FN3359-400-99    |    | 400 (438)     | 220           | 5.1                 | 29           |                                                                                     | -99                                                                                 | 10.5   | 801919     |
| FN3359-600-99    |    | 600 (657)     | 315           | 5.1                 | 44           |                                                                                     | -99                                                                                 | 11.0   | 801920     |
| FN3359-800-99    |    | 800 (876)     | 400           | 5.3                 | 39           |                                                                                     | -99                                                                                 | 20.0   | 806276     |
| FN3359-1000-99   |    | 1000 (1095)   | 560           | 5.3                 | 60           |                                                                                     | -99                                                                                 | 20.0   | 806276     |
| FN3359-1600-99   |    | 1600 (1600)   | 900           | 5.1                 | 131          |                                                                                     | -99                                                                                 | 27.0   | n.a.       |
| FN3359-2500-99   |    | 2500 (2500)   | 1320          | 5.1                 | 300          |                                                                                     | -99                                                                                 | 69.0   | n.a.       |
| FN3359HV-150-28  |    | 150 (164)     | 110           | 7.5                 | 24           | -28                                                                                 |                                                                                     | 6.0    | 801917     |
| FN3359HV-180-28  |    | 180 (197)     | 132           | 7.5                 | 34           | -28                                                                                 |                                                                                     | 6.0    | 801917     |
| FN3359HV-250-28  |    | 250 (250)     | 200           | 7.5                 | 49           | -28                                                                                 |                                                                                     | 9.5    | 801918     |
| FN3359HV-320-99  |    | 320 (350)     | 250           | 7.5                 | 19           |                                                                                     | -99                                                                                 | 10.5   | 801919     |
| FN3359HV-400-99  |    | 400 (438)     | 315           | 7.5                 | 29           |                                                                                     | -99                                                                                 | 10.5   | 801919     |
| FN3359HV-600-99  |    | 600 (657)     | 500           | 7.5                 | 44           |                                                                                     | -99                                                                                 | 11.0   | 801920     |
| FN3359HV-800-99  |   | 800 (876)     | 630           | 7.5                 | 39           |                                                                                     | -99                                                                                 | 21.0   | 806276     |
| FN3359HV-1000-99 |  | 1000 (1095)   | 710           | 7.5                 | 60           |                                                                                     | -99                                                                                 | 21.0   | 806276     |
| FN3359HV-1600-99 |  | 1600 (1600)   | 1320          | 7.5                 | 131          |                                                                                     | -99                                                                                 | 27.0   | n.a.       |
| FN3359HV-2500-99 |  | 2500 (2500)   | 2000          | 7.7                 | 300          |                                                                                     | -99                                                                                 | 69.0   | n.a.       |

\*\*\*\* Calculated at rated current, 480 VAC (FN 3359)/690 VAC (FN 3359 HV) and cos phi=0.8. The exact value depends upon the efficiency of the drive, the motor and the entire application.

\*\*\*\*\* Standardized calculated leakage current acc. IEC60939 under normal operating conditions (FN 3359 at 520 VAC and FN 3359 HV at 760 VAC).

\*\*\*\* Please contact your local Schaffner partner to order the optional protective covers with the order code in the table above (n.a.: not available)

\*\*\*\* For terminal type -28 the max. current is limited to 250A, therefore no uprating possible at lower temperatures.

Distribution Inventory


Up-to-date inventory levels for global distributors is available at <https://products.schaffner.com/stock> or via the QR code printed on the right side




Typical Filter Attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym


150 to 180 A types

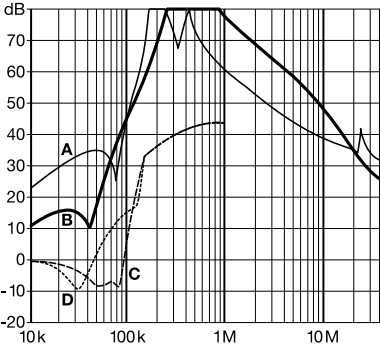


250 to 600 A types

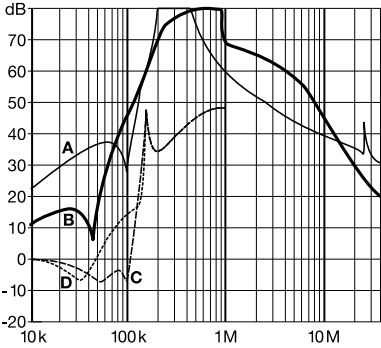


800 and 1000 A types

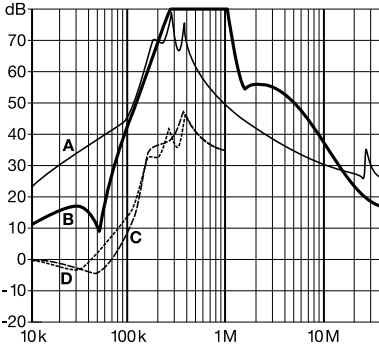


1600 and 2500 A types

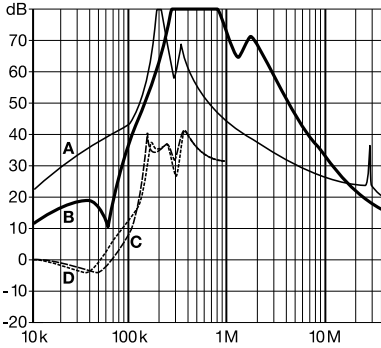

Mechanical Data

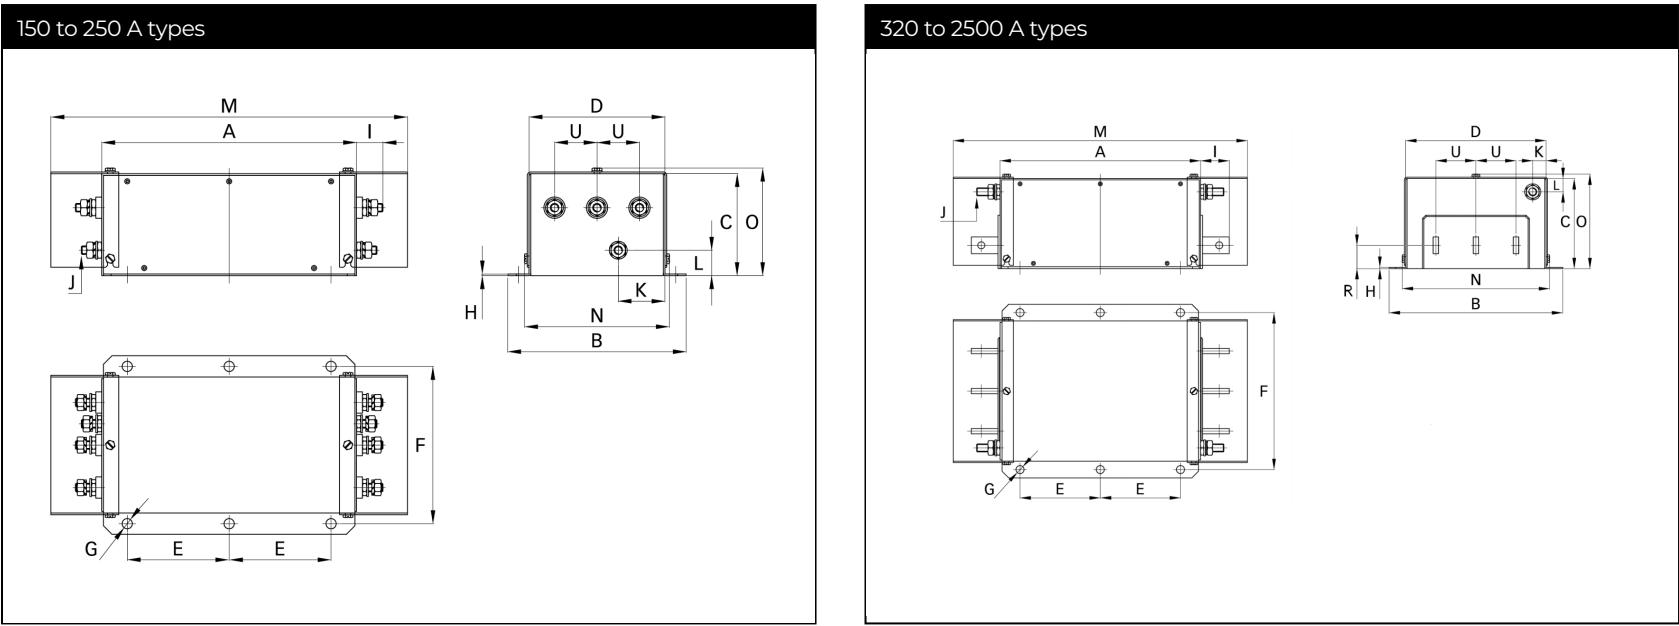

Busbar Connections

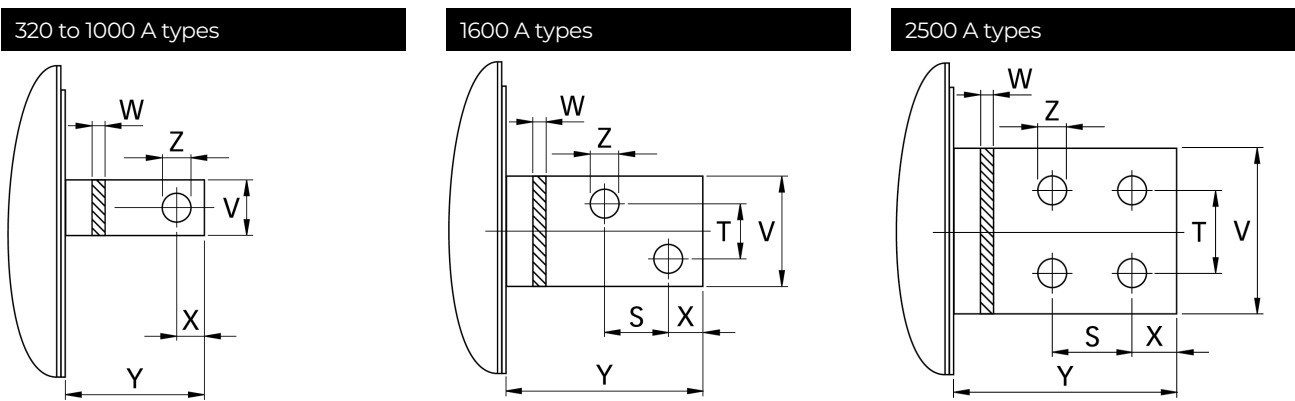


Dimensions

|   | 150 A | 180 A | 250 A | 320 A | 400 A | 600 A | 800 A | 1000 A | 1600 A | 2500 A |
|---|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| A | 300   | 300   | 300   | 300   | 300   | 300   | 350   | 350    | 400    | 450    |
| B | 210   | 210   | 230   | 260   | 260   | 260   | 280   | 280    | 300    | 370    |
| C | 120   | 120   | 125   | 115   | 115   | 135   | 170   | 170    | 160    | 220    |
| D | 160   | 160   | 180   | 210   | 210   | 210   | 230   | 230    | 250    | 300    |
| E | 120   | 120   | 120   | 120   | 120   | 120   | 145   | 145    | 170    | 200    |
| F | 185   | 185   | 205   | 235   | 235   | 235   | 255   | 255    | 275    | 330    |
| G | Ø12   | Ø12   | Ø12   | Ø12   | Ø12   | Ø12   | Ø12   | Ø12    | Ø12    | Ø14    |
| H | 2     | 2     | 2     | 2     | 2     | 2     | 3     | 3      | 3      | 3      |
| I | 33    | 33    | 33    | 43    | 43    | 43    | 53    | 53     | 93     | 110    |
| J | M10   | M10   | M10   | M12   | M12   | M12   | M12   | M12    | M12    | M12    |
| K | 55    | 55    | 62.5  | 20    | 20    | 20    | 25    | 25     | 25     | 25     |
| L | 30    | 30    | 35    | 20    | 20    | 20    | 25    | 25     | 25     | 25     |
| M | 420   | 420   | 420   | 440   | 440   | 440   | 510   | 510    | n.a.   | n.a.   |
| N | 171   | 171   | 191   | 221   | 221   | 221   | 241   | 241    | n.a.   | n.a.   |
| O | 127   | 127   | 132   | 122   | 122   | 142   | 177   | 177    | n.a.   | n.a.   |
| R |       |       |       | 37    | 37    | 37    | 68    | 68     | 68     | 85     |
| S |       |       |       |       |       |       |       |        | 26     | 35     |
| T |       |       |       |       |       |       |       |        | 26     | 35     |
| U | 50    | 50    | 55    | 60    | 60    | 60    | 60    | 60     | 60     | 100    |
| V |       |       |       | 25    | 25    | 25    | 40    | 40     | 60     | 80     |
| W |       |       |       | 6     | 6     | 8     | 8     | 8      | 10     | 15     |
| X |       |       |       | 15    | 15    | 15    | 20    | 20     | 17     | 20     |
| Y |       |       |       | 40    | 40    | 40    | 50    | 50     | 93     | 110    |
| Z |       |       |       | Ø10.5 | Ø10.5 | Ø10.5 | Ø14   | Ø14    | Ø14    | Ø14    |

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m  
(n.a.: not applicable)  
Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.

Accessories

Construction schematic




Transparent protective covers for FN3359 and FN3270 with busbars from 150 to 1000 A

Protection for the operator or inspector from accidental touching of live conductors.

Easily to be added after the filter has been installed and connected.

Installation example



[Technical Data Sheet >](#)

Applicable Busbar Filters

FN3359

FN3270



Surge Protection Devices



SPD with a fail safe function to prevent short-circuit (separation of circuit and element is visually confirmable)

Compliance with IEC 61643-1 that meets the new JIS standards

Against indirect lightning surge for single phase / three phase power supplies Quick response for surge

Impulse current capacity 8/20µs-5,000A

Impulse test category: Class II (Type II)

Every pathway consists of same elements. Between line and line/between lines and ground can protect as the same level.

[Technical Data Sheet >](#)

Headquarters, Global  
Innovation and  
Development

**Switzerland**  
**Schaffner Holding AG**  
Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

To find your local partner within  
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application  
Centers

**China**  
**Schaffner EMC Ltd. Shanghai**  
T20-3 C, No 565 Chuangye Road, Pudong district  
201201  
Shanghai  
+86 2138139500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)

**Finland**  
**Schaffner Oy**  
Sauvonrinne 19 H  
8500  
Lohja  
+358 50 468 7284  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

**France**  
**Schaffner EMC S.A.S.**  
16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

**Germany**  
**Schaffner Deutschland GmbH**  
Schoemperlenstrasse 12B  
76185  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

**India**  
**Schaffner India Pvt. Ltd**  
Regus World Trade Centre  
WTC, 22nd Floor Unit No 2238, Brigade Gateway Campus, 26/1, Dr. Rajkumar Road Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

**Italy**  
**Schaffner EMC S.r.l.**  
Via Ticino, 30  
20900  
Monza (MB)  
+39 039 21 41 070  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

**Japan**  
**Schaffner EMC K.K.**  
ISM Sangenjaya 7F  
1-32-12 Kamiuma, Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

**Singapore**  
**Schaffner EMC Pte Ltd.**  
Blk 3015A Ubi Road 1, #05-09, Kampong Ubi Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

**Spain**  
**Schaffner EMC España**  
Calle Caléndula 93, Miniparc III, Edificio E El Soto de Moraleja, Alcobendas  
28109  
Madrid  
+34 917 912 900  
[spainsales@schaffner.com](mailto:spainsales@schaffner.com)

**Sweden**  
**Schaffner EMC AB**  
Östermalmstrorg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

**Switzerland**  
**Schaffner EMV AG**  
Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

**Taiwan**  
**Schaffner EMV Ltd.**  
U-Town  
20 Floor-2, No 97, Section 1, XinTai 5th Road, XiZhi District  
22175  
New Taipei City  
+886 226975500  
[taiwansales@schaffner.com](mailto:taiwansales@schaffner.com)

**Thailand**  
**Schaffner EMC Co. Ltd.**  
Sathorn Square Tower  
Room 3780, 37FL, 98 North-Sathorn Rd, Silom, Bangrak  
10500  
Bangkok  
+66 621056397  
[thailandsales@schaffner.com](mailto:thailandsales@schaffner.com)

**United Kingdom**  
**Schaffner Ltd.**  
1, Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[uksales@schaffner.com](mailto:uksales@schaffner.com)

**United States**  
**Schaffner EMC Inc.**  
52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)