

## SUMMARY

### # Wires

Low voltage 2



*Image is for illustrative purpose only*

|                  |                                |
|------------------|--------------------------------|
| Series           | 0B                             |
| Termination type | Female solder                  |
| IP rating        | 50                             |
| AWG wire size    | 28.00 - 20.00                  |
| Cable Ø          | 4.30 - 5.20 mm                 |
| Status           | active                         |
| Matching parts   | <a href="#">EGJ.0B.302.CLA</a> |

### Download

[Request a quote](#)

[Eplan](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

|                   |                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Shell Style/Model | FG*: Straight plug, cable collet and nut for fitting a bend relief                                                            |
| Keying            | 2 keys (gamma=45, plug: female contacts, receptacle: male contacts)                                                           |
| Housing Material  | Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Variant           | Z : Nut for fitting a bend relief                                                                                             |
| Weight            | 9.66 g                                                                                                                        |

### Performance

|               |                           |
|---------------|---------------------------|
| Configuration | 0B.302 : 2 Low Voltage    |
| Insulator     | L: PEEK (UL 94 / V-0/1.5) |
| Rated Current | 10 Amps                   |

### Specifications

Contact Type: Solder  
Contact Dia.: 0.9 mm (0.035in)  
Bucket Dia.: 1.0 mm (0.039in)  
Max. Solid Conductor: 0.56 mm<sup>2</sup> (AWG 20)  
Max. Stranded Conductor: 0.56 mm<sup>2</sup> (AWG 20)  
R (max): 4.8 mOhm


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-shell): 1050 V (AC), 1490 V (DC)  
Vtest (contact-contact): 1000 V (AC), 1400 V (DC)

Others

Endurance (Shell): 5000  
Temp (min / max): -55° C / +250° C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
Salt Spray Corrosion: >1000 hr

DRAWINGS

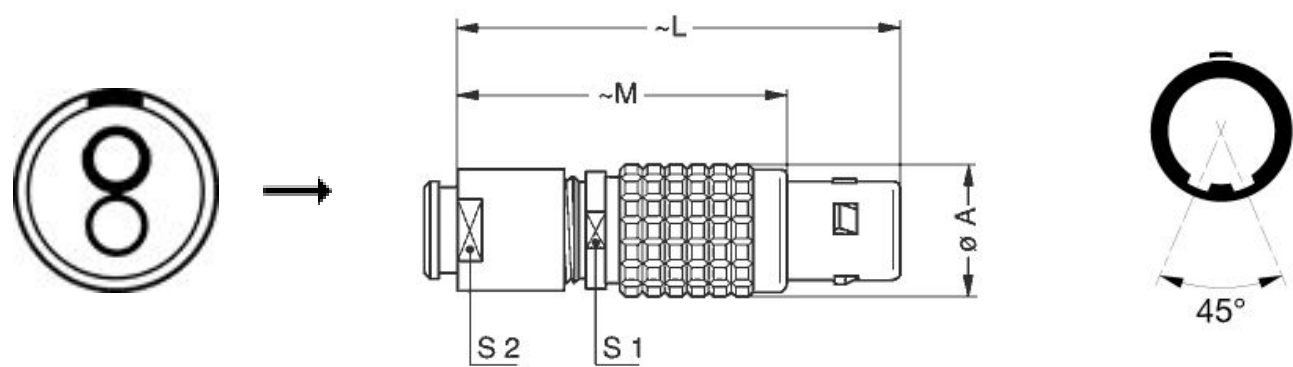

Dimensions

|     | A    | L    | M    | S1   | S2   |
|-----|------|------|------|------|------|
| mm. | 9.5  | 35   | 25   | 8    | 7    |
| in. | 0,37 | 1,38 | 0,98 | 0,31 | 0,28 |

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Spanner wrench: [DCD.OB.005.PA070](#)

Cables

|        |     |       |                                                                                     |
|--------|-----|-------|-------------------------------------------------------------------------------------|
| 120240 | PVC | Black |  |
| 120250 | PVC | Grey  |   |
| 2221   | PVC | Black |  |
| 4082   | PVC | Grey  |                                                                                     |

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.