


# ACMA POC Series

## Winding Type Chip Inductor

### Size 3225




#### FEATURES

- Ferrite core wire wound construction.
- High Reliability due to wire wound type construction.
- Small footprint as well as low profile.
- 100% Lead(Pb) & Halogen-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature-55~+150°C
- Quantity: 1500pcs

#### APPLICATION

- Inductor for use with separate signal and power lines in in-vehicle PoC (Power Over Coax)
- Application guides: Car Infotainment

#### Dimensions: [mm]

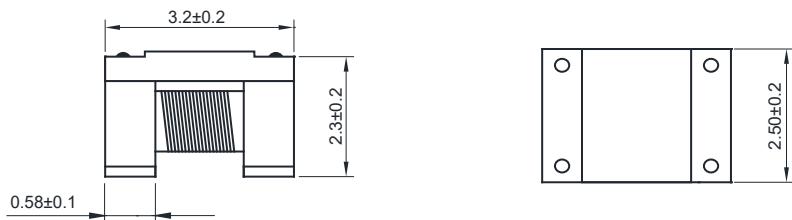

#### Electrical Properties:


Part No	L @ 1 MHz ±20% ( $\mu$ H)	R <sub>DC</sub> Max. ( $\Omega$ )	S.R.F Min. (MHz)	I <sub>SAT</sub> (mA)	I <sub>R</sub> Based on temperature rise (mA)		
					Ambient temperature 85°C	Ambient temperature 105°C	Ambient temperature 125°C
ACMA3225POC-470M	47	0.90	30	300	500	300	100

I<sub>SAT</sub>: Applied the current to coils, the inductance change shall be less than 30% of initial value.

Ambient temperature (85°C/105°C): the part temperature (ambient temperature plus self-generation of heat) should be under 125°C.

Ambient temperature (125°C): the part temperature (ambient temperature plus self-generation of heat) should be under 130°C.

## Soldering Reflow:

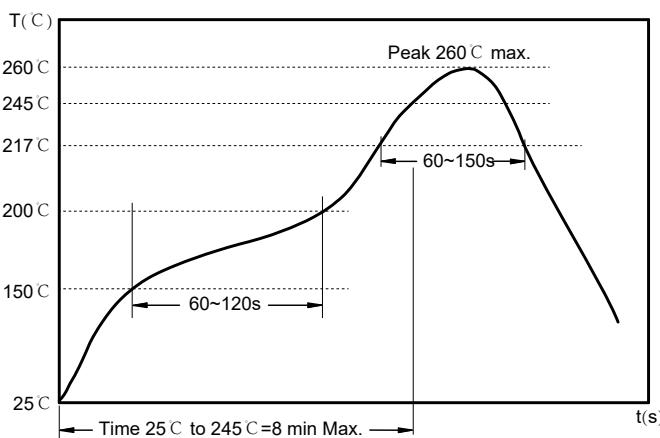

Preheat condition: 150 ~200°C / 60~120 sec.


Allowed time above 217°C: 60~150 sec.

Max temperature: 260°C.

Allowed Reflow time: 3x max.


## Packaging Information:

### Tape Dimension:

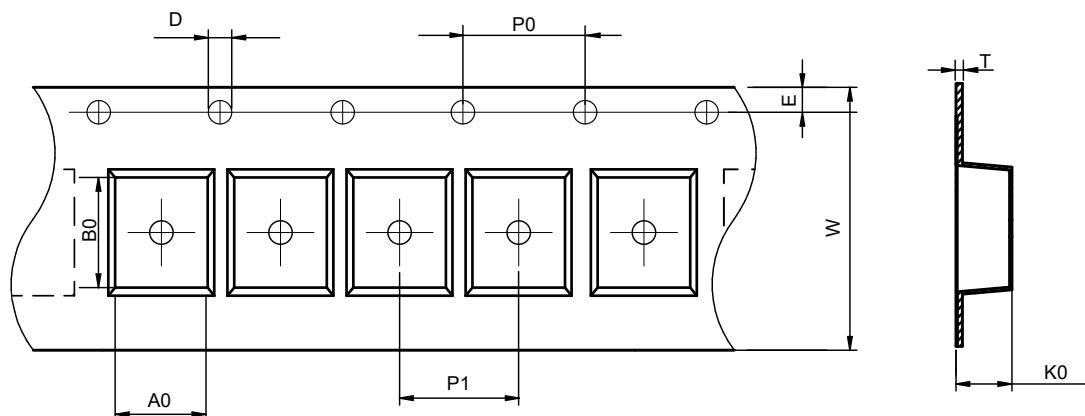


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
ACMA3225POC	2.70±0.1	3.50±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	2.75±0.1	1.75±0.1	0.30±0.05

### Peel force of top cover tape:

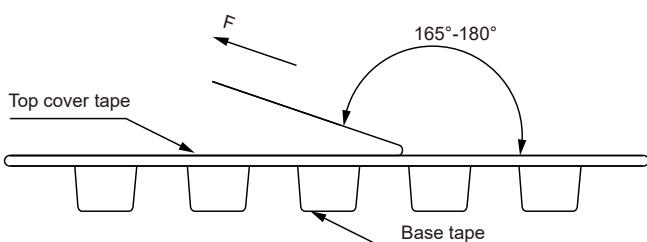


The peel force of top cover tape shall be between 0.14 to 0.78 N

## Reel Dimension: [mm]

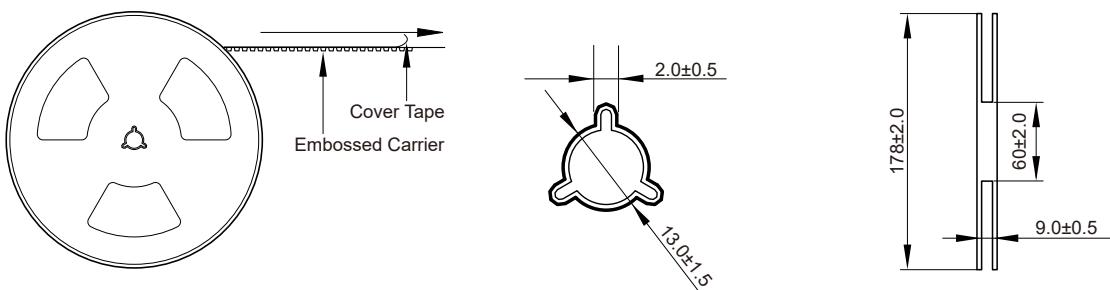

## Packaging Quantity:

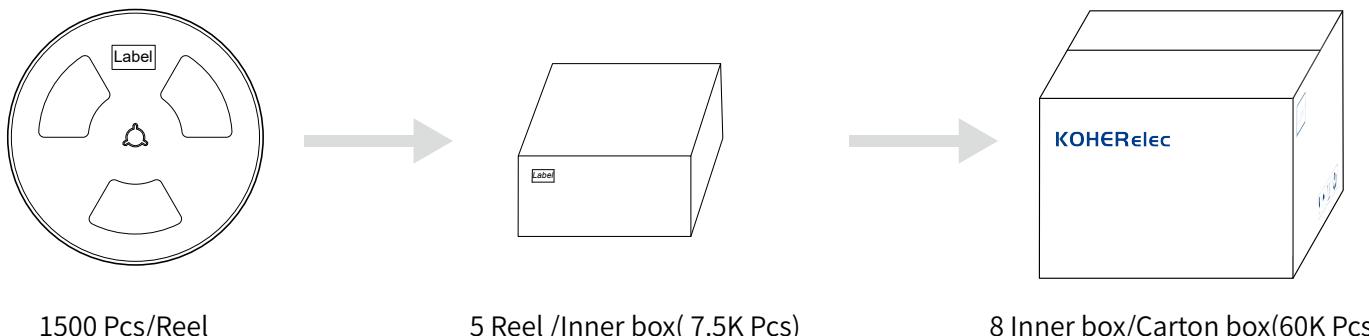

## Cautions and Warnings:

## Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

## Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.