


## technical information

HD Flex™ Dark Fiber Conversion Cassettes are used to convert fiber cabling systems based upon multiples of 12 fibers to an 8 fiber system used by applications requiring parallel optics (e.g. 40GBASE-SR4, 100GBASE-SR4, etc). The cassettes utilize 12 fiber MTP\* connectivity in the rear of the cassette for mating to 12 fiber trunks and provide a breakout to 8 fiber MTP\* ports in the front. The wiring in the 2 x 3 conversion cassette combines the 4 unused fibers from the two 12 fiber trunks (on the back of the cassette) into a third 8 fiber port (on the front of the cassette). HD Flex™ Dark Fiber Conversion Cassettes are also offered in 4 x 6 cassettes in which four 12 fiber trunks are converted into six 8 fiber ports. Cassettes are configured for polarity as a TIA-568 Type-A or Type-B.



## application

Application areas include key elements as specified in Data Center Cabling Standard TIA-942 cross connects in main, horizontal, and equipment distribution areas.

## construction

<b>Fiber count:</b>	24 and 48
<b>Fiber types:</b>	Multimode: OM4 50/125µm
<b>Front connectivity:</b>	8-fiber MTP* adapter(s) with male ferrules (pins) and PC Polish
<b>Rear MTP* connectivity:</b>	12-fiber MTP* adapter(s) with male ferrules (pins) and PC Polish

## environmental properties

<b>Operating temperature:</b>	Room Temperature 23°C (73°F)
<b>Storage and shipping temperature:</b>	-40°C to +75°C (-40°F to 167°F)

## performance properties

<b>Insertion loss (Component loss):</b>	Ultra Low Loss (per channel): 0.35 dB max.
<b>Return loss:</b>	Per Channel: > 30dB (MM)
<b>Connector durability:</b>	MTP* connector meets TIA/EIA 568.C.3; A.4.9 Durability: 500 mating cycles

## standards

Connectivity meets or exceeds TIA/EIA-568-C.3 performance requirements. Supports IEEE 802.3 (40/100 Gigabit Ethernet) and ANSI T11.2 (Fibre Channel) channel and link specifications. Compliant with ROHS 2002/95/EC.

\*MTP is a registered trademark of US Conec Ltd.

# HD Flex™ Dark Fiber Conversion Cassettes

## part number configurator

Example: FH4ZU-24-NMNMA = Fiber, HD Flex™ Cassette, dark fiber, OM4, Ultra Low Loss, 24 fiber with Method A polarity

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	F	H	4	Z	U	—	2	4	—	N	M	N	M	A	

### 1 – Fiber Product

F = Fiber

### 2 – Product

H = HD Flex™ Cassette

### 3 – Generation

4 = Conversion Cassette

### 4 – Fiber Type

Z = OM4 50/125µm

### 5 – Fiber Performance

U = Ultra Low Loss

### 6 – Dash

### 7 and 8 – Numbers of Fibers

24 = 24-fiber total

48 = 48-fiber total

### 9 – Dash

### 10 and 12 – Options

N = None

### 11 and 13 – Polarity

M = MTP\* connector

### 14 and 15 – Polarity


A = Method A

B = Method B


\*MTP is a registered trademark of US Conec Ltd.

## HD™ Flex Dark Fiber Conversion Cassettes


24 Fiber

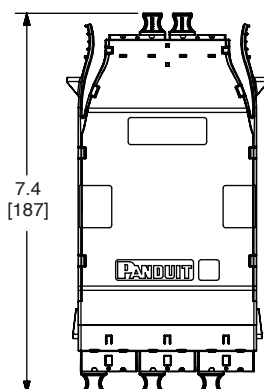


Front View

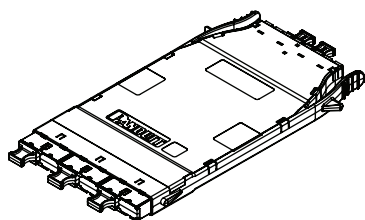

48 Fiber

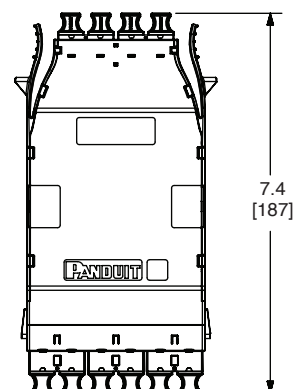

Front View

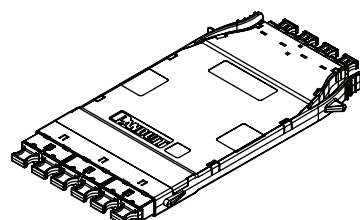

Dimensions are in inches. [Dimensions in brackets are metric].

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

©2016 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP103--WW-ENG  
12/2016