

www.lemo.com

PHG.0K.305.CLLC40Z

SUMMARY

Wires

Low voltage 5



Image is for illustrative purpose only

Series OK

Termination type Female solder

IP rating 68

AWG wire size 30.00 - 22.00

Cable Ø 3.60 - 4.00 mm

Status active

Matching parts FGG.0K.305.CLAC40Z

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model PH*: Free receptacle, cable collet and nut for fitting a bend relief

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant Z: Nut for fitting a bend relief

Weight 14.71 g

Performance

Configuration 0K.305 : 5 Low Voltage
Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 6.5 Amps

Specifications

Contact Type: Solder

Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Max. Solid Conductor: 0.34 mm² (AWG 22) Max. Stranded Conductor: 0.34 mm² (AWG 22)

R (max): 6.1 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest (contact-shell): 700 V (AC), 990 V (DC) Vtest (contact-contact): 1000 V (AC), 1400 V (DC)


Others

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

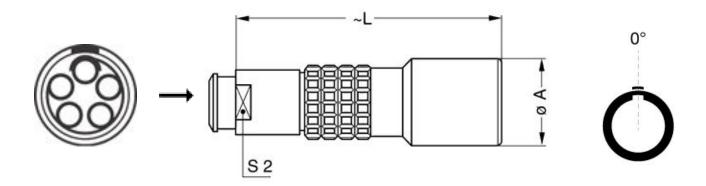

Dimensions

	А	L	S2
mm.	13	34	7
in.	0,51	1,34	0,28

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Spanner wrench: DCD.0E.007.PA070