



GaAs SP4T Switch 5-2000 MHz

SW-262

- Low Insertion Loss, 1.0 dB Typical
- Fast Switching Speed, 20 ns Typical
- Ultra Low DC Power Consumption, 0.3mA Typical
- Integral TTL (SW-262) or CMOS (SW-265) Driver

Guaranteed Specifications* (From -55°C to +85°C)

Frequency Range	5-2000 MHz	5-2000 MHz
Insertion Loss	5-2000 MHz	2.0 dB Max
	5-1000 MHz	1.4 dB Max
	5- 500 MHz	1.2 dB Max
VSWR	5-2000 MHz	2.5:1 Max
	5-1000 MHz	1.5:1 Max
	5- 500 MHz	1.3:1 Max
Isolation	5-2000 MHz	35 dB Min
	5-1000 MHz	37 dB Min
	5- 500 MHz	42 dB Min

Operating Characteristics


Impedance	50 Ohms Nominal
Switching Characteristics	(TTL)
t _{RISE} , t _{FALL}	7 ns
t _{ON} , t _{OFF} (50% CTL to 90/10% RF)	20 ns
Transients (In-Band)	80 mV
Input Power for 1 dB Compression	
500-2000 MHz	+ 27 dBm Typ
50 MHz	+ 21 dBm Typ

Environmental

See Appendix for MIL-STD-883 screening option.

*All specifications apply when operated with bias voltages of +5 VDC (SW-262) and 50 ohm impedance at all RF ports

FP-17

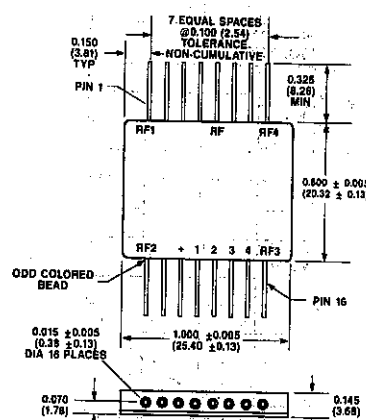


Dimensions in () are in mm.


See Appendix for complete physical dimensions

GaAs SP4T Switch

Typical Performance

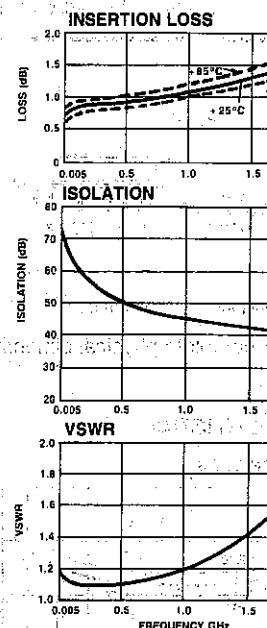

Schematic



Truth Table

Control Input				Condition	
*1 = Logic High				RF Common To	
TTL (SW-262)/CMOS (SW-265)					
CTL1	CTL2	CTL3	CTL4	RF1	RF2
0	0	0	0	ON	OFF
0	1	0	0	OFF	ON
0	0	1	0	OFF	OFF
0	0	0	1	OFF	OFF

Ordering Information

Model No.	Package
SW-262 PIN	Flatpack

Specifications Subject to Change Without Notice.


M/A-COM Inc. 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

Telephone: 800-366-2260


Specifications Subject to Change Without Notice.

M/A-COM Inc. 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

Typical Performance

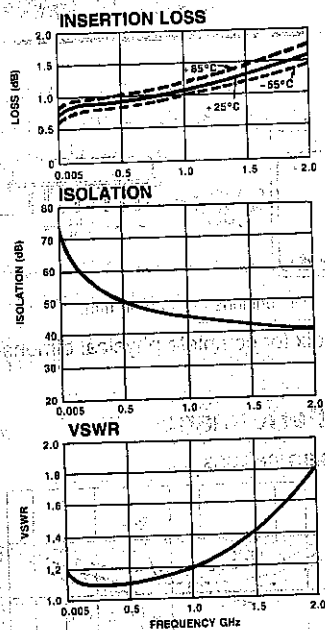

Schematic



Truth Table

Control Input				Condition of Switch			
CTL1 CTL2 CTL3 CTL4				RF Common To Each RF Port			
1	0	0	0	ON	OFF	OFF	OFF
0	1	0	0	OFF	ON	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF
0	0	0	1	OFF	OFF	OFF	ON