

ST5 SERIES TOGGLE SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS




Floor Care Appliances




Commercial Appliances




Industrial Controls



Medical / Dental



HVAC



Vending Machines

RoHS

SPECIFICATIONS

Contact Rating: 16(8)A 125/250VAC μ T125/55
20(8)A 125/250VAC μ T125/55
20A 6-30VDC μ T125/55

Electrical Life: 10,000 Cycles

Contact Resistance: 50m Ω Max. initial

Insulation Resistance: 50M Ω Min.

Dielectric Strength: 1500V RMS

Operating Temperature: -10°C to 125°C

Storage Temperature: -10°C to 125°C

Circuit Function: SP or DP
2 or 3 Position

Agency Approvals: cURus

Moisture Protection: IP40

Panel Thickness: 1-8mm

FEATURES & BENEFITS

- Multiple termination options
- Single or double pole
- Available in both 2 or 3 position circuits
- Multiple Actuator options

PART NUMBER CONFIGURATOR

Series	No. of Poles	Function	Rating	Actuator	Termination
ST5	S S - Single Pole D - Double Pole	P1 P1 - OFF - (ON) P2 - OFF - ON P3 - ON - ON P4 - (OFF) - ON P6 - (ON) - ON P7 - ON - (ON) P8 - ON - OFF - ON P9 - ON - OFF - (ON) P10 - (ON) - OFF - (ON)	1 1 - 16(8)A 125/250VAC μ T125/55 2 - 20(8)A 125/250VAC μ T125/55 4 - 20A 6-30VDC μ T125/55	T1 T1 - 17mm Metal Bat T2 - 22mm Plastic Bat	C1 C1 - 3/16 Quick Connect C2 - 1/4 Quick Connect S1 - Solder Lug S2 - Screw Terminal

* () denotes momentary

Specifications subject to change without notice 6.22.2022



E-SWITCH®


www.e-switch.com

800.867.2717

1

ST5 SERIES TOGGLE SWITCH


No. of Pole AND FUNCTION OPTIONS

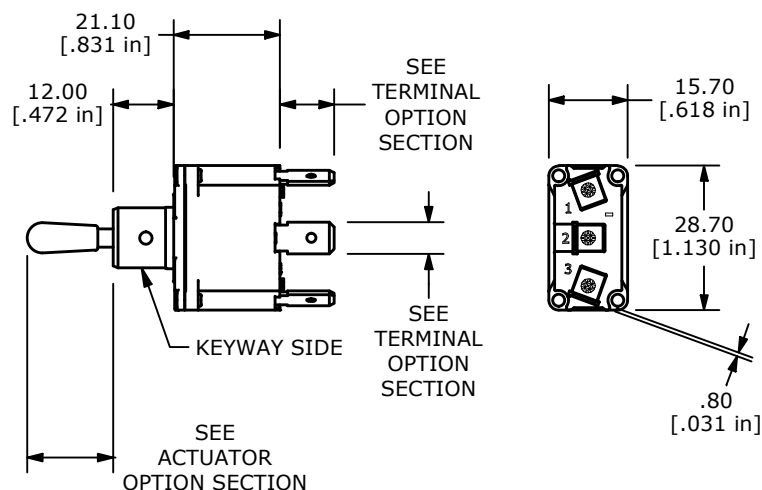

S - SINGLE POLE

			
FUNCTION	POS.1	POS.2	POS.3
P1*	OFF	N/A	(ON)=(2-3)
P2*	OFF	N/A	ON=2-3
P3	ON=1-2	N/A	ON=2-3
P4*	(OFF)	N/A	ON=2-3
P6	(ON)=(1-2)	N/A	ON=2-3
P7	ON=1-2	N/A	(ON)=(2-3)
P8	ON=1-2	OFF	ON=2-3
P9	ON=1-2	OFF	(ON)=(2-3)
P10	(ON)=(1-2)	OFF	(ON)=(2-3)

() = MOMENTARY
* = NO TERMINAL 1

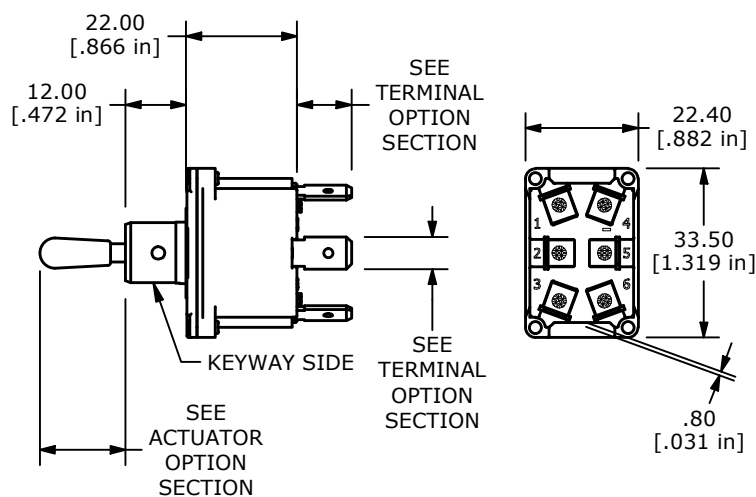

D - DOUBLE POLE




			
FUNCTION	POS.1	POS.2	POS.3
P1*	OFF	N/A	(ON)=(2-3),(5-6)
P2*	OFF	N/A	ON=2-3,5-6
P3	ON=1-2,4-5	N/A	ON=2-3,5-6
P4*	(OFF)	N/A	ON=2-3,5-6
P6	(ON)=(1-2),(4-5)	N/A	ON=2-3,5-6
P7	ON=1-2,4-5	N/A	(ON)=(2-3),(5-6)
P8	ON=1-2,4-5	OFF	ON=2-3,5-6
P9	ON=1-2,4-5	OFF	(ON)=(2-3),(5-6)
P10	(ON)=(1-2),(4-5)	OFF	(ON)=(2-3),(5-6)

() = MOMENTARY
* = NO TERMINAL 1 & 4





ST5 SERIES TOGGLE SWITCH

ACTUATOR OPTIONS

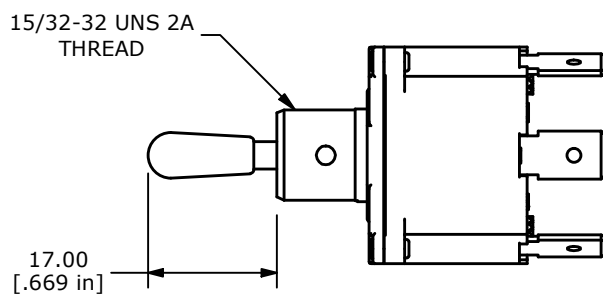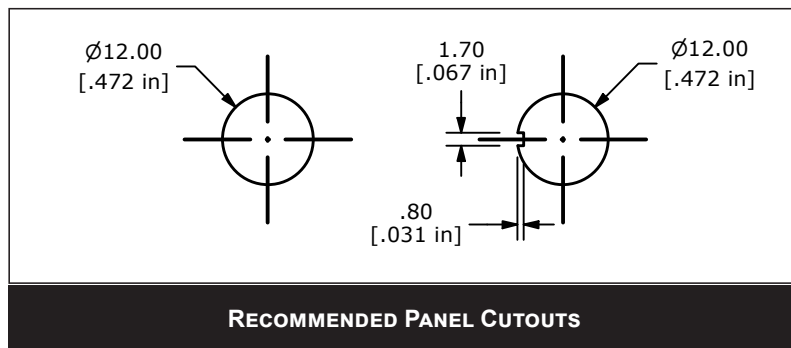

T1 = 17mm METAL BAT

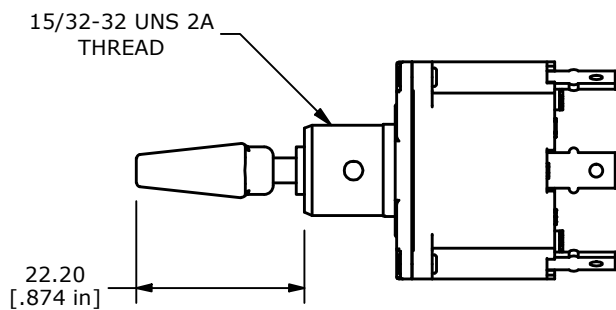

T2 = 22mm PLASTIC BAT



E-SWITCH®



www.e-switch.com

800.867.2717



3

ST5 SERIES TOGGLE SWITCH



TERMINAL OPTIONS

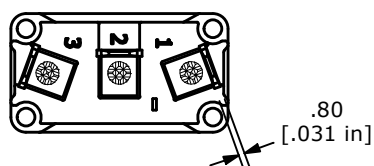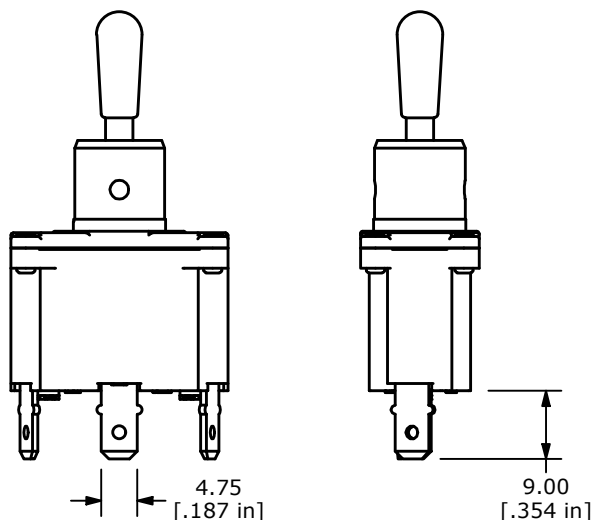



C1 = 3/16 QUICK CONNECT

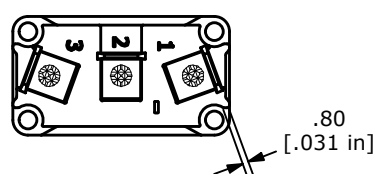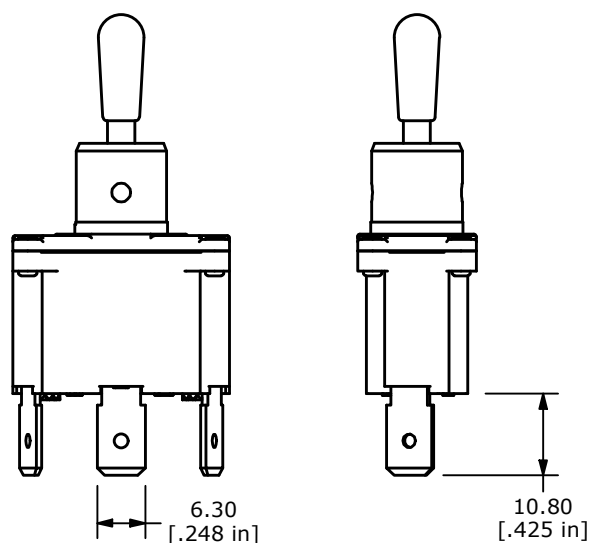

C2 = 1/4 QUICK CONNECT

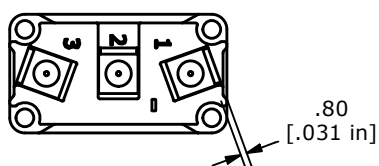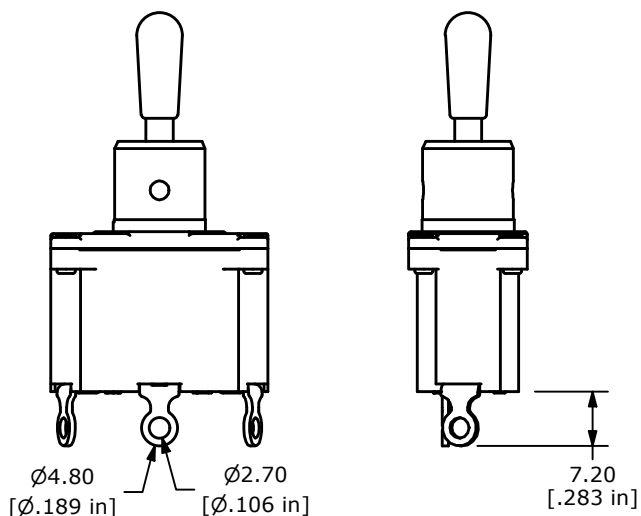

S1 = SOLDER LUG

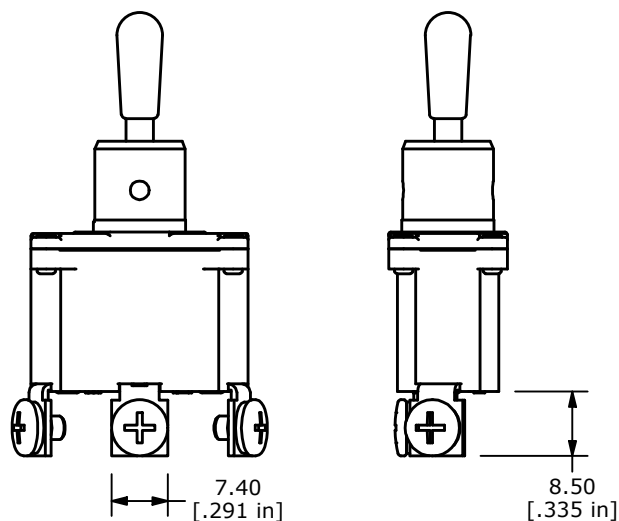

S2 = SCREW TERMINAL



E-SWITCH®

www.e-switch.com

800.867.2717

4

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS