

SUMMARY

Wires

Low voltage	2
Coax	3



Image is for illustrative purpose only

Series	3K
Termination type	Male crimp mixed / multi coax
IP rating	68
AWG wire size	24.00 - 20.00
Cable Ø	3.60 - 4.00 mm
Status	active
Matching parts	EGG.3K.862.CLL1

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Weight	73.70 g

Performance

Configuration	3K.862 : 3 Coax (50 Ohm), 2 Low V.
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated Current	9 Amps

Specifications


Contact Type: Coaxial 50 Ohm (Crimp) Type C
Contact Dia.: 0.7 mm (0.028in)
Min. Conductor: 0.34 mm² (AWG 22)
Max. Conductor: 0.34 mm² (AWG 22)
R (max): 5.8 mOhm
Test voltage (kV rms): 1.1
Test voltage (kV dc): 1.6
Cable type: RG 178 B/U, RG 196 A/U

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

- Endurance (Shell): 5000 mating cycles
- Temp (min / max): -55° C / +200° C
- Humidity (max): <=95% [at 60 deg C / 140 F]
- Vibration: 15 g [10 Hz - 2000 Hz]
- Shock Resistance: 100 g [6 ms]
- Climatical Category: 50/175/21
- Shielding (min): 95 dB (10 MHz)
- Shielding (min): 80 dB (1 GHz)
- Salt Spray Corrosion: >1000 hr

DRAWINGS

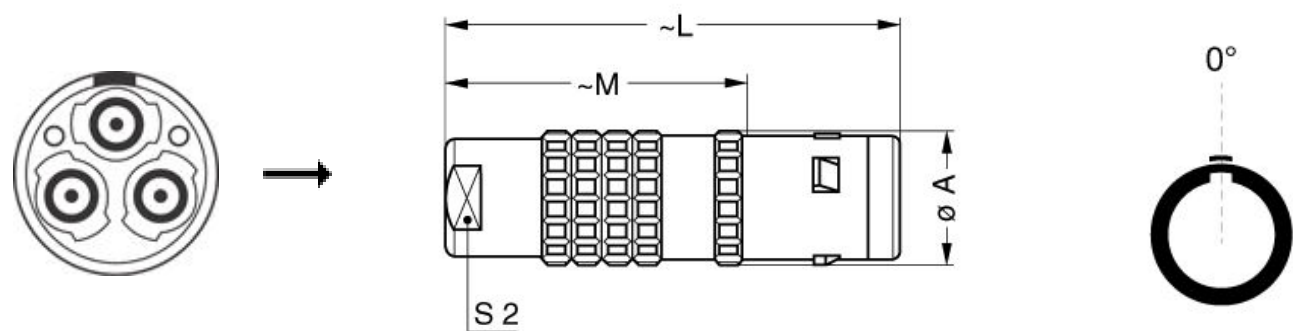

Dimensions

	A	L	M	S2
mm.	19	61	41	15
in.	0,75	2,40	1,61	0,59

RECOMMENDED BY LEMO

Tools

- Crimp Tool: [DPC.91.701.V](#)
- Crimp settings: AWG/Selector = 20-22-24/6-5-5

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Positionner:	<u>DCE.91.093.BVC</u>
Extractor:	<u>DCC.91.393.4LT</u>
Die Tool:	<u>DPE.99.103.1K</u>
Replacement contact:	FGG.3B.560.ZZC
Spanner wrench:	<u>DCD.3E.030.PA150</u>
Caps:	<u>BFG.3K.100.NAS</u>

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.