

# FGN.2M.319.XLCT

## SUMMARY

### # Wires

Low voltage 19



Image is for illustrative purpose only

Series 2M

**Termination type** Male crimp

IP rating 68

AWG wire size 26.00 - 22.00 Cable Ø 6.50 - 13.00 mm

Status active

Matching parts EGN.2M.319.XLM

### **Download**

Request a quote

Eplan Catalog

See video assembly instructions

## **TECHNICAL DETAILS**

#### **Mechanics**

**Shell Style/Model** FG\*: Straight plug with arctic grip and mold stop

**Keying** 3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)

Housing Material

Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces

bronze/brass

Weight 11.49 g

### **Performance**

Configuration 2M.319: 19 Low Voltage

Insulator L: PEEK
Rated Current 4 Amps

## **Specifications**

Contact Type: Crimp Contact Retention: 22 N Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Min. Conductor: 0.14 mm<sup>2</sup> (AWG 26) Max. Conductor: 0.34 mm<sup>2</sup> (AWG 22)

R (max): 6.1 mOhm

Test voltage (kV rms) Contact-contact: 1.2

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Test voltage (kV rms) Contact-shell: 0.95

### **Others**

Endurance (Shell): 3000 mating cycles Temp (min / max): -20°C / +200°C Humidity (max): 21 days at 95%

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)

Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]


Shock Resistance: 300 g [ 3 ms]

Lighting strike EIA 364-75: 10K amps - 6 times Thermal shock: 5 cycles: -65°C to +150°C

EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >= 70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)

Salt Spray Corrosion: max. 48 hr

## **DRAWINGS**

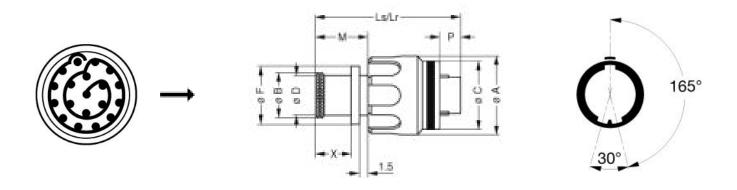

### **Dimensions**

	А	В	С	D	F	Lr	Ls	М	Р	X
mm.	18.9	14	17.2	13	15.5	27.5	27.5	10.1	3.9	7.1
in.	0,74	0,55	0,68	0,51	0,61	1,08	1,08	0,40	0,15	0,28

## **RECOMMENDED BY LEMO**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **Tools**

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: <a href="DCE.91.070.5MVC">DCE.91.070.5MVC</a>
Extractor: <a href="DCF.93.070.4LT">DCF.93.070.4LT</a>
Replacement contact: FGN.0M.555.ZZC

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.