

www.lemo.com

FMW.4M.340.XLC

SUMMARY

Wires

Low voltage 40

Image is for illustrative purpose only

Series 4M

Termination type Male crimp

IP rating 68

AWG wire size 26.00 - 22.00 Cable Ø 9.75 - 19.50 mm

Status active

Matching parts PMW.4M.340.XLM

Download

Request a quote

Catalog

See video assembly instructions

TECHNICAL DETAILS

Mechanics

Shell Style/Model FM*: Straight plug, key (N) or keys (P, R, S, T, U, V, W and X) with knurled grip

Keying 5 keys (alpha=95, beta=115, gamma=35, delta=25, plug: male contacts, receptacle: female

contacts)

Housing Material

Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces

bronze/brass

Weight 24.02 g

Performance

Configuration 4M.340: 40 Low Voltage

Insulator L: PEEK

Rated Current 3.5 Amps

Specifications

Contact Type: Crimp Contact Retention: 22 N

Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Min. Conductor: 0.14 mm² (AWG 26) Max. Conductor: 0.34 mm² (AWG 22)

R (max): 6.1 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Test voltage (kV rms) Contact-contact: 1.20 Test voltage (kV rms) Contact-shell: 1.35

Others

Endurance (Shell): 3000 mating cycles Temp (min / max): -20°C / +200°C Humidity (max): 21 days at 95%

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)

Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]


Shock Resistance: 300 g [3 ms]

Lighting strike EIA 364-75: 10K amps - 6 times Thermal shock: 5 cycles: -65°C to +150°C

EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >= 70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)

Salt Spray Corrosion: max. 48 hr

DRAWINGS

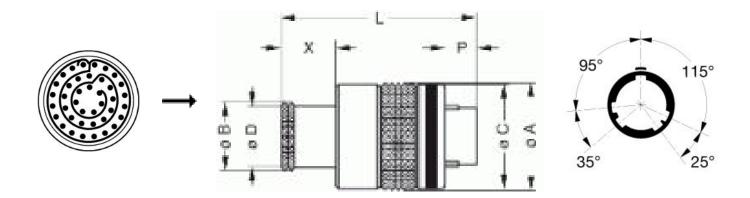

Dimensions

	А	В	С	D	Lr	Ls	Р	Х
mm.	25	20.7	24.5	19.5	28.6	28.6	3.4	7.6
in.	0,98	0,81	0,96	0,77	1,13	1,13	0,13	0,30

RECOMMENDED BY LEMO

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: <u>DCE.91.070.5MVC</u>

Extractor: DCF.93.070.4LT

Replacement contact: FGN.0M.555.ZZC

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.