

PHG.0T.305.KYMC50Z

SUMMARY

Wires

Low voltage 5



Image is for illustrative purpose only

Series 0T

Termination type Female crimp

IP rating 68

AWG wire size 26.00 - 22.00 Cable Ø 4.60 - 5.00 mm

Status active

Alternative part PHG.0T.305.KYMK50Z

Matching parts FGG.0T.305.KYCC50Z

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model PH*: Free receptacle, cable collet and nut for fitting a bend relief

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (black chrome) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch

sleeve and mid pieces

Variant Z: Nut for fitting a bend relief

Weight 23.33 g

Performance

Configuration T.305: 5 Low Voltage

Insulator Y: PEEK for crimp contacts

Rated Current 6.5 Amps

Specifications

Contact Type: Crimp Contact Retention: 22 N Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.8 mm (0.031in)

Min. Conductor: 0.14 mm² (AWG 26) Max. Conductor: 0.34 mm² (AWG 22)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

R (max): 6.1 mOhm

Vtest (contact-shell): 1200 V (AC), 1700 V (DC) Vtest (contact-contact): 1250 V (AC), 1770 V (DC)

Others

Endurance (Shell): >3000 mating cycles Temp (min / max): -55°C / +200°C


Humidity (max): <=95% [at 60 deg C /140 F] Resistance to vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21

Shielding efficiency (min): 75 dB (at 10 MHz) Shielding efficiency (min): 40 dB (at 1 GHz)

Salt Spray Corrosion: >1000 hr

DRAWINGS

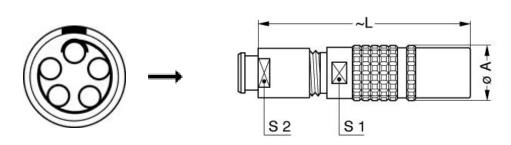



Dimensions

	А	L
mm.	9	37
in.	0,35	1,46

RECOMMENDED BY LEMO

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: DCE.91.070.BVM
Extractor: DCF.92.070.3LT
Replacement contact: EGG.0B.655.ZZM

Cables

50140 PVC Grey	
----------------	--