



www.lemo.com

SUMMARY

Wires

Low voltage 5



Image is for illustrative purpose only

Series 0M

Termination type Male print PCB

IP rating 68

AWG wire size 30.00 - 22.00

Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FMT.0M.305.XLM

Download

Request a quote
PCB Eagle Pattern
PCB Altium Pattern
PCB KiCad Pattern

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model ED*: Fixed receptacle with square flange for printed circuit

Keying 3 keys (beta=135, gamma=90, plug: female contacts, receptacle: male contacts)

Housing Material

Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces

bronze/brass

Weight 3.55 g

Performance

Configuration OM.305: 5 Low Voltage

Insulator L: PEEK
Rated Current 6.5 Amps

Specifications

Contact Type: Print (straight)
Contact Dia.: 0.7 mm (0.028in)

R (max): 6.1 mOhm

Test voltage (kV rms) Contact-contact: 1.25 Test voltage (kV rms) Contact-shell: 1

Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 3000 mating cycles Temp (min / max): -20°C / +200°C Humidity (max): 21 days at 95%

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)

Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]


Shock Resistance: 300 g [3 ms]

Lighting strike EIA 364-75: 10K amps - 6 times Thermal shock: 5 cycles: -65°C to +150°C

EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >= 70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)

Salt Spray Corrosion: max. 48 hr

DRAWINGS

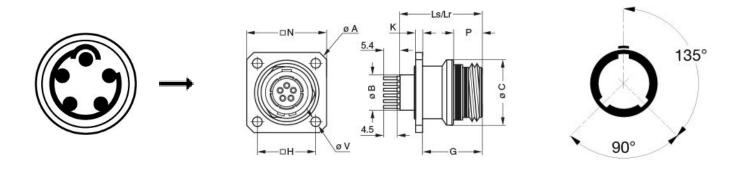

Dimensions

	Α	В	С	G	Н	К	Lr	Ls	N	Р	SV
mm.	20.6	4.72	12.7	12.8	11	1.5	18.3	18.3	16	5.3	2.7
in.	0,81	0,19	0,50	0,50	0,43	0,06	0,72	0,72	0,63	0,21	0,11

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

