

## SUMMARY

### # Wires

High voltage 1



*Image is for illustrative purpose only*

Series	0E
Termination type	Male solder High-Voltage
IP rating	68
AWG wire size	0.00 - 0.00
Cable Ø	2.60 - 3.00 mm
Status	active
Matching parts	<a href="#">ERA.0E.403.CTL</a>

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug, cable collet and nut for fitting a bend relief
Keying	Circular, male
Housing Material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Variant	Z : Nut for fitting a bend relief
Weight	12.69 g

### Performance

Configuration	0E.403 : 1 High Voltage
Insulator	T: PTFE
Rated Current	4 Amps

### Specifications

Contact Type:	Solder
Test voltage (kV DC)	6
Test voltage (kV AC)	4.2
Creepage distance min.:	7 mm


### Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -55°C / +200°C  
Humidity (max): <=95% [at 60 deg C /140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Climatical Category: 50/175/21  
Shielding (min): 95 dB (10 MHz)  
Shielding (min): 80 dB (1 GHz)  
Salt Spray Corrosion: >1000 hr

---

## DRAWINGS

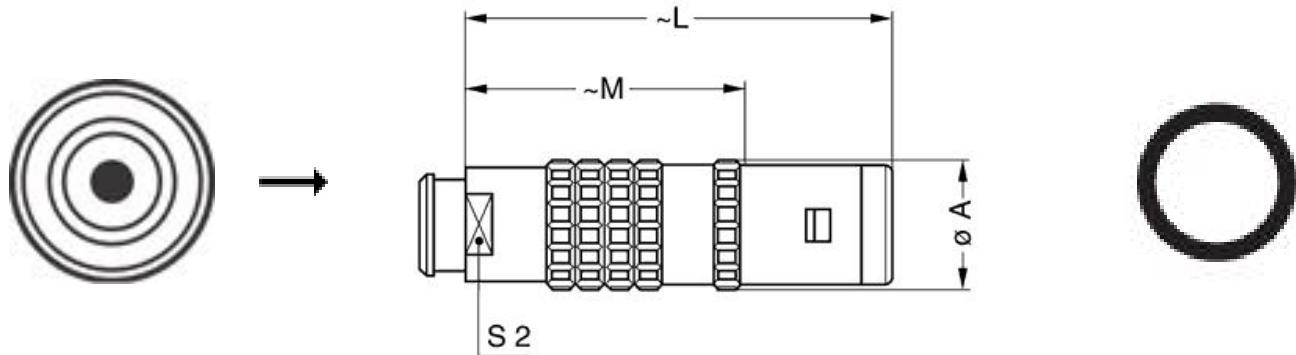

### Dimensions

	A	L	M	S2
mm.	11	34	23	7
in.	0,43	1,34	0,91	0,28

---

## RECOMMENDED BY LEMO

### Tools

Spanner wrench: [DCD.0E.007.PA070](#)  
Caps: [BFA.0E.100.NAS](#)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

*LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*