

## SUMMARY

### # Wires

Low	19
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)  
[PCB Eagle Pattern](#)  
[Catalog](#)

### Series

Termination type	Female print 90° PCB
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	FGG.2T.319.CLAC50
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	HE*: Fixed socket, nut fixing, watertight or vacuumtight, back panel mounting
Keying	1 keys (alpha=0; plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	Ø 0 - 0 mm
Variant	P : Watertight

### Performance

Configuration	T.319 : 19 Low Voltage
Insulator	
Rated Current	5 Amps

### Specifications

Contact Type: Print (elbow)  
Vtest: 1250 V (DC)900 V (AC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


## Others

Humidity (max): <=95% [at 60 deg C /140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >144 hr  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
IP Rating: 68

---

## DRAWINGS

### Draws

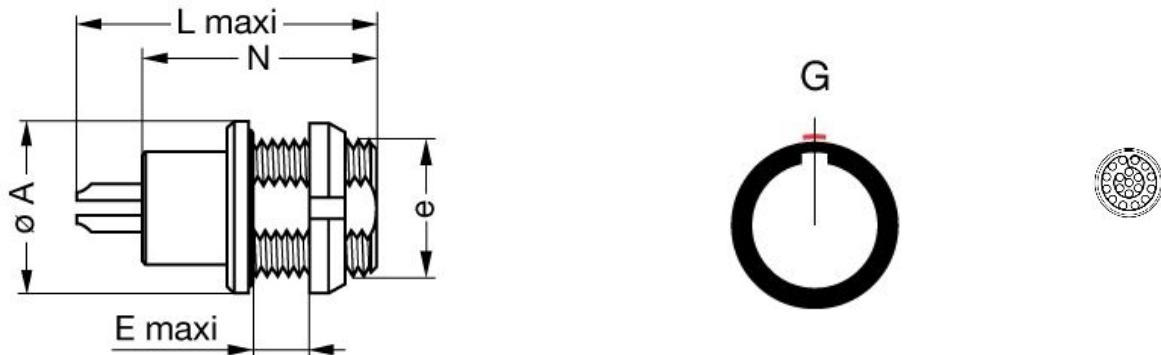

### Dimensions

	A	B	C	E	L	N	e
mm.	18.5	13.6	15.1	7.5	30.5	25	M15x1.0
in.	0,73	0,54	0,59	0,30	1,20	0,98	

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

*LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*