

# ST-8ES1N8AH100S - Device connector rear mounting



1613629

<https://www.phoenixcontact.com/us/products/1613629>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, straight, for standard and SPEEDCON interlock, M17, number of positions: 5+3+PE, contact connection type: Socket, Axial O-ring, Central fixing, shielded: yes, number of positions: 9, connection method: Crimp connection, series: ST

## Your advantages

- Application-specific panel mounting optionally with thread or anti-rotation protection and lock nut
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly

## Commercial data

Item number	1613629
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB32
Product key	ABRBER
Catalog page	Page 139 (C-2-2019)
GTIN	4046356442381
Weight per piece (including packing)	39.7 g
Weight per piece (excluding packing)	27.19 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

### Notes

Order information:	Order crimp contacts 5 x 0.6 mm, 4 x Ø 1 mm separately
<b>Safety note</b>	
Safety note	<p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• Only use tools recommended by Phoenix Contact</li><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li><li>• Operate the connector only when it is fully plugged in and interlocked.</li><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li><li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting</li></ul>

# ST-8ES1N8AH100S - Device connector rear mounting



1613629

<https://www.phoenixcontact.com/us/products/1613629>

warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Mounting

Mounting type	Rear mounting
Mounting	Central fixing

## Product properties

Product type	Circular connectors (device side)
Series	ST
Application	Power
Number of positions	9
Connection profile	5+3+PE
Shielded	yes
Coding	N
Thread type	M17

## Material specifications

Seal material	FPM
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)

## Electrical properties

Contact	
Contact diameter	1 mm
Max. current	14 A
Nominal voltage $U_N$	630 V
Overshoot category	III
Degree of pollution	3
Rated surge voltage	6 kV

Contact	
Contact diameter	0.6 mm
Max. current	3.6 A
Nominal voltage $U_N$	60 V
Overshoot category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

## Connection data

Conductor connection	
Connection method	Crimp connection
Contact connection type	Socket

## Connector

Type	straight
------	----------

# ST-8ES1N8AH100S - Device connector rear mounting

1613629

<https://www.phoenixcontact.com/us/products/1613629>



Direction of rotation	Standard
Connection 1	
Head design	Socket

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Ambient temperature (storage/transport)	15 °C ... 25 °C
Altitude	2000 m
Permissible humidity (storage/transport)	50 % ... 65 %

# ST-8ES1N8AH100S - Device connector rear mounting


1613629

<https://www.phoenixcontact.com/us/products/1613629>




## Drawings

Schematic diagram

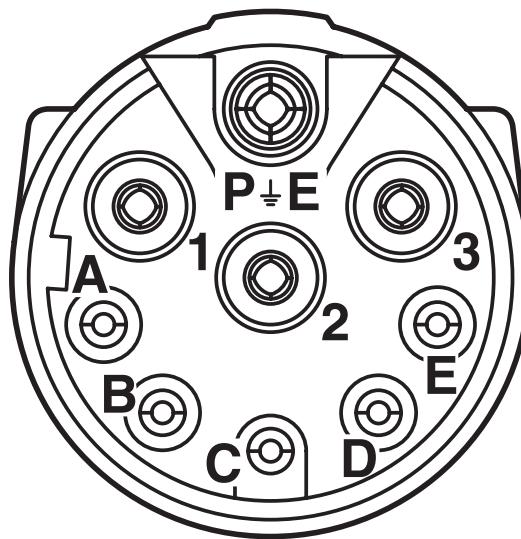

Connector pin assignment

Dimensional drawing

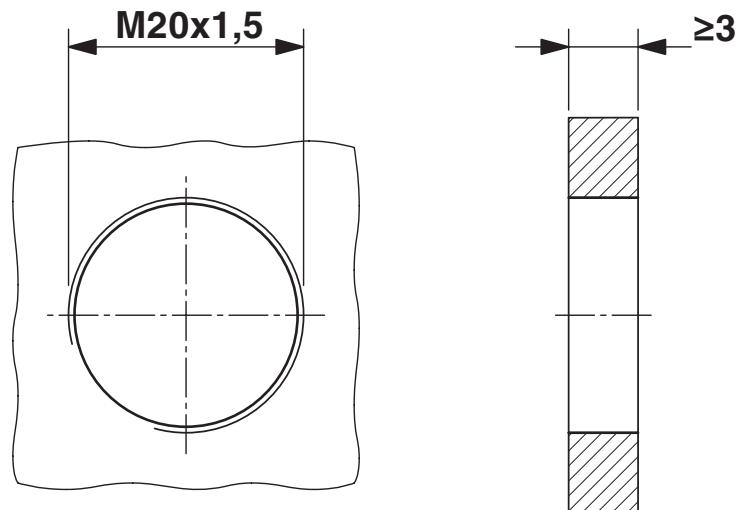

Installation dimensions: mounting with thread


# ST-8ES1N8AH100S - Device connector rear mounting

1613629

<https://www.phoenixcontact.com/us/products/1613629>




Dimensional drawing

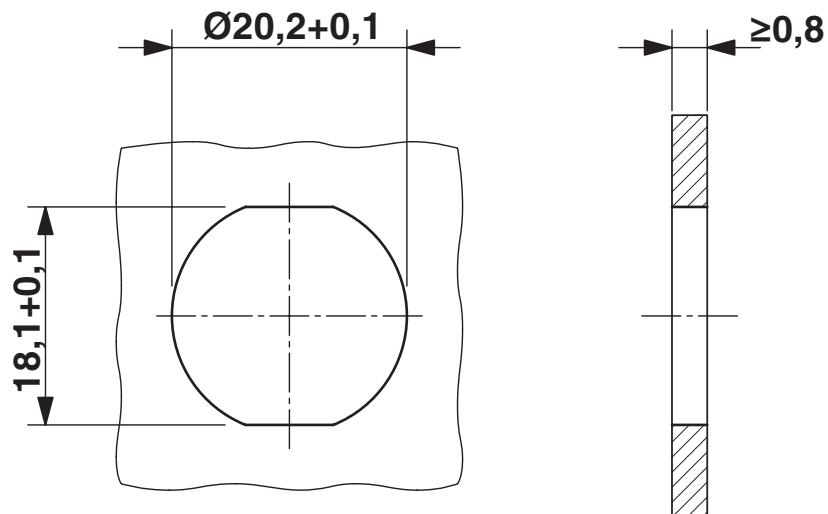

Installation dimensions: mounting with anti-rotation protection and locking nut

Dimensional drawing

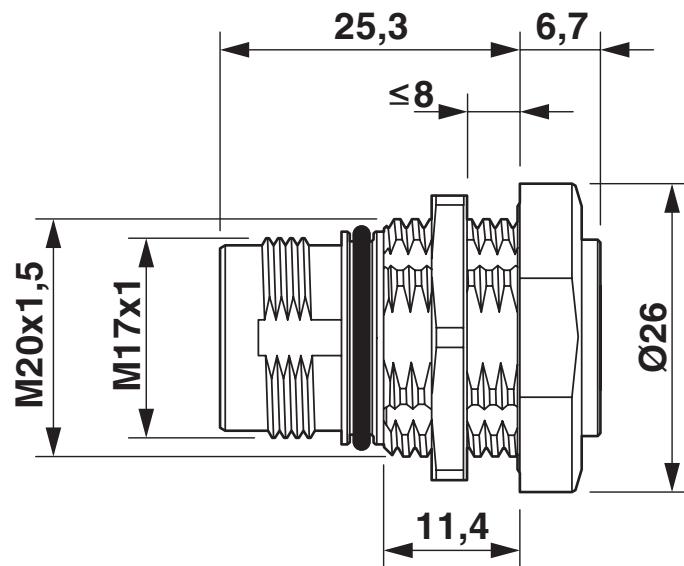

Dimensional drawing


# ST-8ES1N8AH100S - Device connector rear mounting

1613629

<https://www.phoenixcontact.com/us/products/1613629>



Diagram

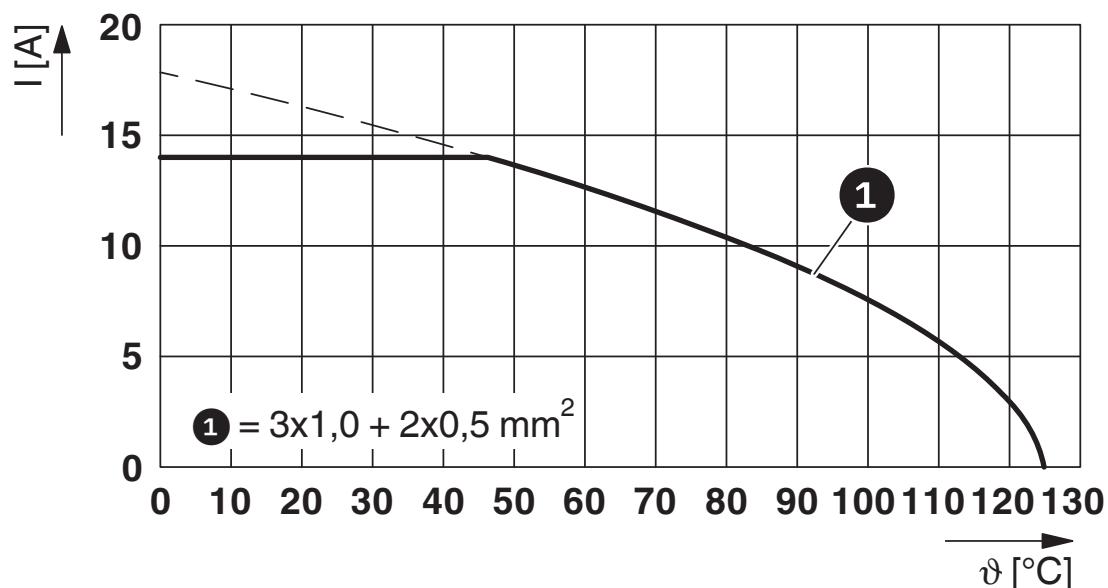

$I$  = current strength,  $\vartheta$  = ambient temperature,  $3 \times 1.0 + 2 \times 0.5 \text{ mm}^2$

# ST-8ES1N8AH100S - Device connector rear mounting



1613629

<https://www.phoenixcontact.com/us/products/1613629>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1613629>



### UL Recognized

Approval ID: E153698-20140124

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	3.5 A	-	-
Signal	60 V	3.5 A	-	-



### cUL Recognized

Approval ID: E153698-20140124

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	3.5 A	-	-
Signal	60 V	3.5 A	-	-



### cUL Recognized

Approval ID: E335019-20111129

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	3.5 A	-	-
Signal	60 V	3.5 A	-	-



### UL Recognized

Approval ID: E335019-20111129

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	3.5 A	-	-
Signal	60 V	3.5 A	-	-



### UL Listed

Approval ID: E468743-20210825

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	10 A	-	18 - 18
Signal	60 V	2 A	-	20 - 20



### cUL Listed

Approval ID: E468743-20210825

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	8 A	18 - 18	-
Signal	60 V	2 A	20 - 20	-

# ST-8ES1N8AH100S - Device connector rear mounting

1613629

<https://www.phoenixcontact.com/us/products/1613629>



**cULus Listed**

# ST-8ES1N8AH100S - Device connector rear mounting

1613629

<https://www.phoenixcontact.com/us/products/1613629>



## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# ST-8ES1N8AH100S - Device connector rear mounting

1613629

<https://www.phoenixcontact.com/us/products/1613629>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)